neko
THINK DESIGN

2026-2027

neko
THINK DESIGN
www.nekolighting.com

2026-2027

neko
THINK DESIGN

NEKO LIGHTING AG
Kreuzstrasse 2
CH-8008 Zürich / Switzerland
+41 44 451 80 15
sales@nekolighting.com
www.nekolighting.com

CB CE UK CA ISO9001

NEKO

THINK DESIGN

www.nekolighting.com

NEKO vereint europäisches Denken und asiatische Effizienz

Die Schweizer Firma NEKO LIGHTING bietet seit 2013 effiziente und qualitativ hochwertige LED Architekturbeleuchtung zu einem attraktiven Preis-Leistungsverhältnis. Kombiniert werden europäisches Denken und asiatische Effizienz zur gemeinsamen Firmenphilosophie „Think Design“.

Eigentümer ist Sven Speissegger (Schweiz), welcher über eine langjährige und umfangreiche Erfahrung im Beleuchtungsmarkt verfügt.

NEKO hat seinen Hauptsitz in der Schweiz und verfügt über Lager- und Produktionsstandorte in Europa und China.

In Deutschland, Frankreich, England, Nordamerika/Kanada, Peking und Shanghai befinden sich im NEKO Besitz Vertriebsstützpunkte. Eigene Lagerhaltung ist in Deutschland und China vorhanden.

NEKO Leuchten werden exklusiv über ein Distributorennetz in zwischen mehr als 120 Ländern weltweit vertrieben.

Von Beginn an produzierte NEKO nachhaltige LED Leuchten. Für die Produkte setzt NEKO ausschließlich hochwertige LED-Chips namenhafter Hersteller, z. B. Osram, Samsung, Citizen ein. Die verwendeten Treiber besitzen das ENEC-Zeichen.

Alle NEKO Produkte für den Innen- und Außenbereich haben eine Garantie von 5 Jahren. 2019 investierte NEKO in die Produktionsanlage und in die lichttechnischen Labore in China. Die Expansion erforderte größere Räume und einen neuen Standort für die Firma.

NEKO THINK DESIGN

www.nekolighting.com

NEKO: the union of European thinking and Asian Efficiency

NEKO LIGHTING provides high quality as well as efficient LED-lighting solutions at a very competitive price/performance ratio since 2013. By uniting European thinking and Asian efficiency, NEKO created its corporate philosophy “Think Design”.

NEKO is owned by Sven Speissegger (Switzerland), with a long track record and extensive know-how in the lighting market.

NEKO is headquartered in Switzerland, with warehouses and factories operating across both Europe and China.

The corporation runs with NEKO owned offices in Germany, France, Great Britain, North America/Canada, Beijing and Shanghai.

NEKO lights are exclusively sold via a distributor network in more than 120 countries worldwide.

NEKO LED-lights were sustainably produced right from the beginning and are solely fitted with premium LED-Chips by renowned manufacturers such as Osram, Samsung and Citizen. All drivers installed come with ENEC-labeling.

All NEKO indoor and outdoor lighting products are backed by a reliable 5-Year Warranty. In 2019, NEKO embarked on an exciting expansion journey driven by the need for larger facilities and a new site, significantly investing in our production facility and state-of-the-art lighting laboratories in China.

NEKO THINK DESIGN

www.nekolighting.com

NEKO COLORS

Standard white & standard black of NEKO products

RAL 9016 Equivalent	NEKO STANDARD WHITE
RAL 9005	JET BLACK

Besides standard colors as mentioned in the catalogue, any individual RAL classic color can be custom made.

Details for your individual colors

Have the freedom of design a wide range of NEKO products, can now be ordered in any RAL classic color for indoor lighting

The individual color can be produced for you with a reasonable surcharge.

For this customized color the delivery times will be a bit longer.

Please ask our NEKO sales team to support you.



NEKO Color Options & Customization

Discover a range of color solutions to perfectly match your design vision.

Classic

RAL 9016 Equivalent - NEKO Standard White
Delivery time standard lead time

RAL 9005 - Jet Black
Delivery time standard lead time

Collection

RAL 1013 - Oyster White
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 7044 - Silk Grey
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 7040 - Window Grey
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 1035 - Pearl Beige
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 8028 - Terra Brown
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 7024 - Graphite Grey
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 1002 - Sand Yellow
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 1004 - Golden Yellow
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 6027 - Light Green
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 6019 - Pastel Green
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 5014 - Pigeon Blue
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 4011- Pearl Violet
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

RAL 3014 - Antique Pink
Delivery time standard lead time + 4 weeks
Additional cost $300 per size per series

Luxury

Applicable only to the RS25, RS40, FRS72, and PS55 models under the Moduline 26 series.

Brushed Gold
Delivery time standard lead time
Additional cost 30%

Brushed Silver Bronze (Z)
Delivery time standard lead time
Additional cost 30%

INDEX


SENSE 45 Series



S45R1 ■ 011


S45S1 ■ 012

SENSE 55 Series




S55R1-G2 ■ 013-014

SENSE 55H Series



S55HR1-G2 ■ 015

SENSE 55L Series



S55LR1-G2 ■ 016

SENSE 68 Series




S68R1-G2 ■ 017-020



S68S1-G2 ■ 021-022

SENSE 75 Series




S75R1-G2 ■ 023-025

New



S75S1-G2 ■ 026

SENSE 100 Series



S100R1-G2 ■ 027-030



S100S1-G2 ■ 031-032



S100HR1-G2 ■ 033



S100HS1-G2 ■ 034




S100R7-G2 ■ 035




S100HR7-G2 ■ 036



S100R2-G2 ■ 037



S100HR2-G2 ■ 038



S100S2-G2 ■ 039



S100HS2-G2 ■ 040

SENSE 125 Series



S125R1-G2 ■ 045



S125S1-G2 ■ 046



S125R2-G2 ■ 047



S125S2-G2 ■ 048

SENSE 150 Series



S150R1-G2 ■ 049



S150S1-G2 ■ 050



S150R2-G2 ■ 051



S150S2-G2 ■ 052

SENSE New Wall Washer Series



SENSE W75 ■ 055-057



SENSE W100 ■ 058

MINUX Series



MINUX 38 ■ 059-63



MINUX 44 ■ 065



MINUX 57 ■ 066

TAKEO Round Series



T75 ■ 067-074



T100 Pro ■ 075-076



T150 Pro ■ 077-078



T200 Pro ■ 079-080



T150C Pro ■ 081

TAKEO Square Series



TS68 ■ 083



TS100 Pro ■ 084



TS150 Pro ■ 085

TS200 Pro ■ 086

PASSION Series

PASSION 100 ■ 087-089

PASSION 150 ■ 091

PASSION 200 ■ 092

NEKO Code Introduction

[Code_Prefix]-[Electrical-optical Info.]-[Color Info]-[Accessories]

******	-	*	**	**	**	*	-	*	*	-	*
SSR1G2	-	9	30	45	18	D	-	W	S	-	H
Acronym of Model		CRI	CCT	Beam Angle	Power	Lighting Control		Fixture Color	Reflector / Decoration Ring Color		Accessories

SSR1G2-9304518D-WS-H
- SENSE100-G2, Round Trim, Adjustable Version,
- CRI90,CCT3000K,Beam45°,18W,DALI Control,
- White Trim, Specular 2nd Reflector,
- with Honeycomb.


CLUB LED Module



M1
■095-099



M2
■100



M3
■101-102



M4
■103-104



M4 Pro
■105-110



New

Cvdr1 Vanity
■111-112

CLUB Trim Series



TA5



TA6



TA7



TA8



TF5



TRF1-IP44



TA5-IP65



TSF1



TSA1



TSA2



TSA3



TSA1D
■113-124




TSA2D



TSA3D


SKYJACK Series



SKYJACK A68
■125-127



SKYJACK D
■129-130



SKYJACK F
■131

FUSION MINI Fixed

New



FUSION MINI FM2
■133-137



FUSION MINI FM3
■138



FUSION MINI FM4
■139



FUSION MINI FM6
■140

FUSION G2 Fixed



FUSION G2 FF1
■141-151



FUSION G2 FF2
■152



FUSION G2 FF3
■153



FUSION FX4
■154



FUSION G2 FF5
■155




FUSION G2 FF10
■156

FUSION G2 Fixed Trimless



FUSION FFT5
■155



FUSION FFT10
■156

FUSION Fixed IP65

New



FUSION FF2-IP65
■157



FUSION FF3-IP65
■158



FUSION FF5-IP65
■159



FUSION FF10-IP65
■160

FUSION G2 Adjustable



FUSION G2 FA5
■161

FUSION G2 FA10
■163

FUSION Wall Washer

FUSION FW5
■164

FUSION FW10
■165

FUSION General Light

FUSION FG5
■167

FUSION FG10
■168

FUSION Adjustable Spotlight

FUSION FS1
■169-171

FUSION FS2
■172

FUSION FS3
■173

FUSION FS6
■174

FUSION FF3-FS1
■175

FUSION FF6-FS2
■176

FUSION Fixed Ceiling


New

FUSION FX4FC
■177-179

FUSION FF5FC
■180

FUSION FF10FC
■181


FUSION Linear System

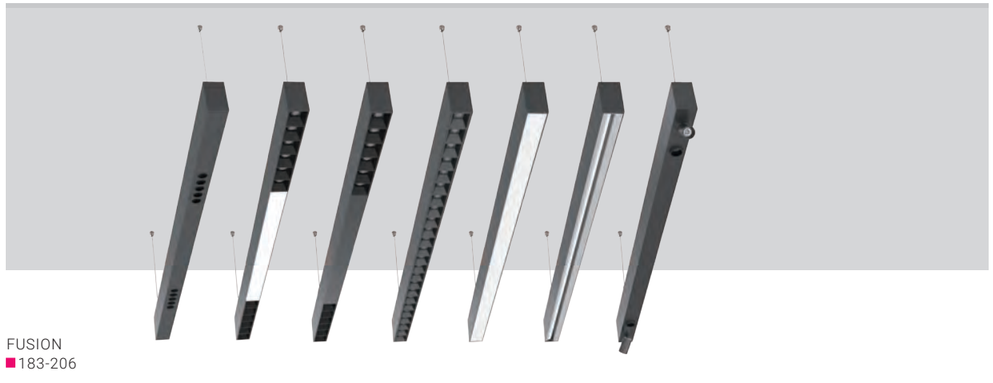

FUSION
■ 183-206

SPACE 60 EVO Series


New

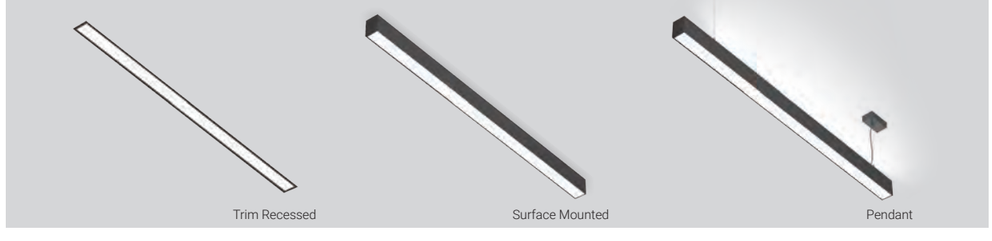

SPACE 60 EVO Linear System
■ 207-238

SPACE 60 PRO Series


New

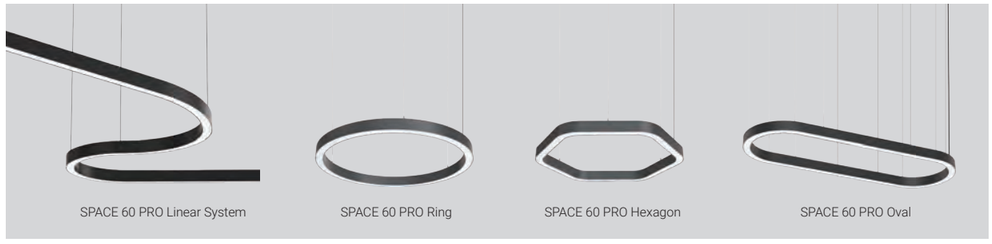

SPACE 60 PRO Linear System
■ 239-294

SPACE 40 PRO Series

New

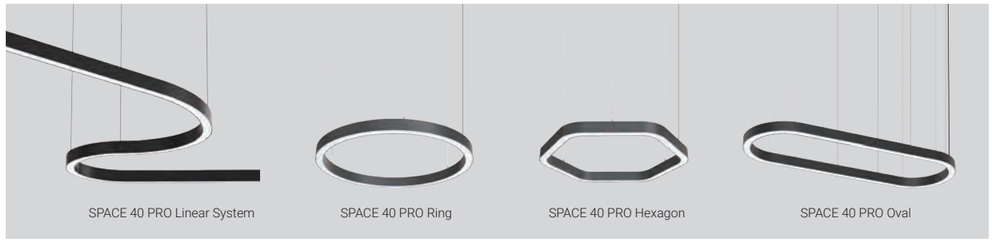

SPACE 40 PRO Linear System
■ 295-336

MODULINE 07 48V Linear System

New



MODULINE 07 48V Linear System
■ 337-380

MODULINE 26 48V Linear System



MODULINE 26 Linear System
■ 381-442

DASH Smart Series



DSD26
■ 443-447



DSO26
■ 448

PURE Series Tracklight



PURE ART
■ 449-456

PURE S
■ 457-458

PURE M
■ 459-460

ROXY Series Tracklight



ROXY ART
■ 461-466

ROXY S
■ 467-468

ROXY K
■ 469-470

Zooming
ROXY Art-Z
■ 471-473

Zooming
ROXY S-Z
■ 474

MISSION Series



MISSION S
■ 475--480

KENZO Series



K1X30
■ 481-485

K1X55
■ 486

K1X70
■ 487

PURE 25 40 55 Series

New



PURE 25-R
■ 489-491


PURE 40-R
■ 492

PURE 55-R
■ 493-494

PURE 40-C
■ 495

PURE 55-C
■ 496

PURE Ceiling Mounted



PURE Art-C
■ 497-499

PURE S-C
■ 500

MIU Series



MIU-C M
■ 501-503

MIU-C L
■ 504



MIU-P S
■ 505

MIU-P M
■ 506

MIU-P L
■ 507-508

MIU Art Series

New



MIU Art-S
■ 509-511

MIU Art-M
■ 512

MIU Art-S DALI
■ 513

MIU Art-M DALI
■ 514

VIBES Series



V1RC
■ 515-519

V2RC
■ 520

V1SC
■ 521

V2SC
■ 522



V1RR
■ 523


V2RR
■ 524

V1SR
■ 525

V2SR
■ 526

PEARL Series

New

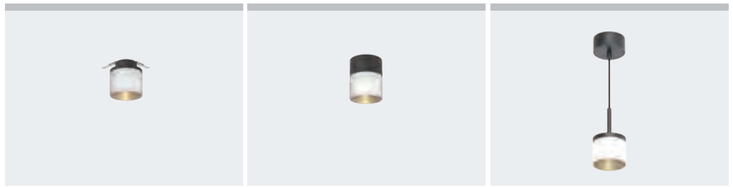

PEARL Semi-recessed
■ 527-532

PEARL Ceiling
■ 533

PEARL Pendant
■ 534

MOVE Series

New

SPACE 07 Series

New

SPACE 16 RING Series

New



MOVE
■ 535-538

SPACE 07
■ 539-542

SPACE 16 RING ceiling
■ 543-548

SPACE 16 RING Semi-recessed
■ 549-550

GAME Ceiling Light Series



GAME
■ 551-562





SUGAR Ceiling Light Series



SUGAR
■ 563-568





GLAMOR Ceiling Light Series

New



GLAMOR 300
■ 569-571



GLAMOR 400
■ 572-574



GLAMOR 600
■ 575-578

MINT Ceiling Light Series



MINT 280
■ 579-583


New



MINT 420
■ 584-586


SPIN Series

New



SPIN
■ 587-590

LED Strip Light



SL2835A
■ 591-596



SL2835B
■ 597-598



SL5050C
■ 599-600



SL2835D
■ 601-602

LED Neon Flex



NF1717T
■ 603-614



NF0817S
■ 615--620



NF1221S
■ 621-626



NF1228S
■ 627-634

LAKEPOINT Series



LAKEPOINT Fixed
■641



LAKEPOINT Adjustable
■642

CARMEL Series



SKYSURFER SSRC
■643



CARMEL Round
■644

RIVA Series




RIVA Round
■645



RIVA Square
■646

CHIC Wall & Ceiling light Series

New



CHIC
■647-649



CAMPSBAY Series



CAMPSBAY Single
■650



CAMPSBAY Double

LAGOON Series



LAGOON
■651

CRUZ D Series



CRUZ D
■652

CAPRI Series



CAPRI
■653

BAY Series



BAY
■654

NICE Series



NICE 250S & NICE 250D
■655



NICE 500S & NICE 500D
■656

St.Tropez Series



St.Tropez
■657

Capetown-Recessed Series



Capetown Round-Recessed
■659



Capetown Square-Recessed

Capetown-Surface Series



Capetown Round-Surface
■660



Capetown Square-Surface


AMALFI Series

New



AMALFI Single
■661-662


POSEIDON Series



POSEIDON S100A
■663-666



POSEIDON S100B



POSEIDON S100C

CALIFORNIA Series



CALIFORNIA 12
■667




CALIFORNIA 16

DURBAN Series



DURBAN
■668

POSITANO Series



POSITANO 300
■669



POSITANO 600

PORTOFINO Series



PORTOFINO Adjustable
■670

AFTER7 Series



AFTER7 Mini
■671



AFTER7 Maxi
■672

NEPTUNE Series



NEPTUNE XSU CV
■673-675



NEPTUNE SU CV
■676

New



NEPTUNE SUBS CV
■677-678



NEPTUNE MU CV
■679

New



NEPTUNE MUBS CV
■680-681



NEPTUNE LUBCV
■682

New



NEPTUNE LUBS CV
■683-784

NEPTUNE SR CV
NEPTUNE SR HV
■685-686

New

NEPTUNE SRBS CV
NEPTUNE SRBS HV
■687-688

NEPTUNE MR CV
NEPTUNE MR HV
■689

New

NEPTUNE MRBS CV
NEPTUNE MRBS HV
■690-691

NEPTUNE LR CV
NEPTUNE LR HV
■692

New

NEPTUNE LRSS CV
NEPTUNE LRSS HV
■693-694

New

NEPTUNE SP
■695-696

New

NEPTUNE MP
■697

New

NEPTUNE LP
■698

TERARACE Series

TERARACE Micro
■699

TERARACE Nano
■700

TERARACE Mini
■701

TERARACE Maxi
■702

TERARACE Dimming Series

New

TERARACE Nano
■703

TERARACE Mini
■704

TERARACE Maxi
■705

TERARACE Maxi
Wall Washer
■706

SENSE G2

Round or square, trim or trimless
Uniform illumination with UGR<19)
Cut-outs from Ø45 mm to Ø150 mm
Modular architectural downlight system
Fixed and adjustable solutions in one family
Flexible optics, outputs and reflector finishes



Project: InterContinental Hotels & Resorts, Hefei, China



SENSE G2

Modular Design Architectural Downlight System

Adjustable and Fixed
Round & Square, Trim & Trimless
LED Engine Power from 4W to 38W
Cutouts in 45mm, 55mm, 68mm, 75mm, 100mm, 125mm, 150mm
Reflector Color in Dark-light(Chrome-black), Specular, Matt, White, Black & Gold

SENSE G2 – Modular Design Architectural Downlight System



S45R1
4W 330lm-380lm



S55R1-G2
7W 500lm-630lm



S68R1-G2
7.5W 850lm-1000lm
11W 1050lm-1200lm



S75R1-G2
9W 750lm-900lm
13W 1050lm-1250lm



S100R1-G2
13W 1350lm-1650lm
18W 1850lm-2200lm



S100HR1-G2
25W 2100lm-2500lm



S125R1-G2
18W 1700lm-2300lm
25W 2300lm-3100lm



S150R1-G2
25W 2800lm-3200lm
38W 4100lm-4700lm





S45S1
4W 330lm-380lm





S68S1-G2
7.5W 850lm-1000lm
11W 1050lm-1200lm





S75S1-G2
9W 750lm-900lm
13W 1050lm-1250lm





S100S1-G2
13W 1300lm-1600lm
18W 1800lm-2150lm






S100HS1-G2
25W 2100lm-2500lm






S125S1-G2
18W 1700lm-2300lm
25W 2300lm-3100lm





S150S1-G2
25W 2800lm-3200lm
38W 4100lm-4700lm



SENSE G2 – Modular Design Architectural Downlight System



S100R7-G2
13W 1350lm-1550lm
18W 1850lm-2150lm

100

S100HR7-G2
25W 2100lm-2400lm

100

S100R2-G2
13W 1200lm-1400lm
18W 1650lm-1900lm

100

96x96

S100HR2-G2
25W 1850lm-2150lm

100

96x96

S100S2-G2
13W 1100lm-1350lm
18W 1550lm-1850lm

S100HS2-G2
25W 1750lm-2100lm

S125R2-G2
18W 1550lm-2050lm
25W 2100lm-2750lm

125

122x122

S125S2-G2
18W 1550lm-2050lm
25W 2100lm-2750lm

S150R2-G2
25W 2500lm-2900lm
38W 3700lm-4300lm


150

147x147

S150S2-G2
25W 2400lm-2800lm
38W 3700lm-4300lm



White



White



Black




Black

Project: Le Bellune Paris Hotel, France




SENSE S45R1 – Modular Design Architectural Downlight



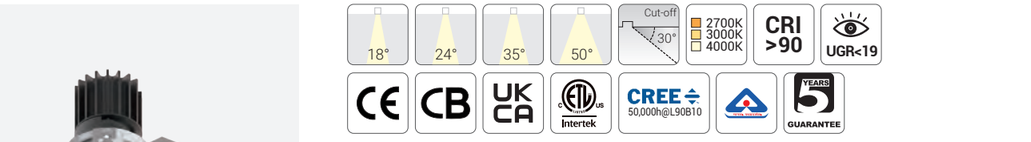


Quick Info

- Ceiling Cut-out: Ø45mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 24°, 35°, 50°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

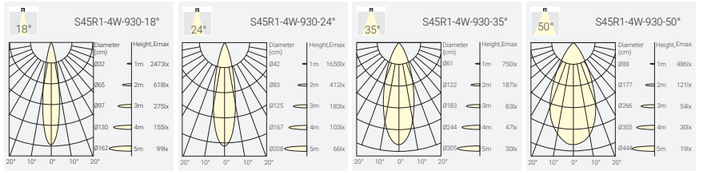

Order Info (SENSE S45 Trim Version in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	18°	480lm	330lm	SUR1-9271804N-WM
						24°	480lm	330lm	SUR1-9272404N-WM
						35°	480lm	330lm	SUR1-9273504N-WM
						50°	480lm	330lm	SUR1-9275004N-WM
					3000K	18°	500lm	350lm	SUR1-9303804N-WM
						24°	500lm	350lm	SUR1-9302404N-WM
						35°	500lm	350lm	SUR1-9303504N-WM
						50°	500lm	350lm	SUR1-9305004N-WM
					4000K	18°	550lm	380lm	SUR1-9401804N-WM
						24°	550lm	380lm	SUR1-9402404N-WM
						35°	550lm	380lm	SUR1-9403504N-WM
						50°	550lm	380lm	SUR1-9405004N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Black White Matt

Optional accessory



Code for SUR1-9305004N-WM with Honeycomb
SUR1-9305004N-WM-H


Honeycomb

Coding

SUR1	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**		**Trim Finish**	**Reflector Color**		**Accessory**
SUR1		927	18	04	N		W	B		H
S45R1		CRI90/ 2700K	18°	4W	No Driver		White	Black		Honeycomb
		930	24		F		B	M		
		CRI90/ 3000K	24°		On-Off		Black	Matt		
		940	35		P			W		
		CRI90/ 4000K	35°		Phase Dim			White		
			50		A					
			50°		0-10V Dim					
					D					
					DALI Dim					


SENSE S45S1 – Modular Design Architectural Downlight



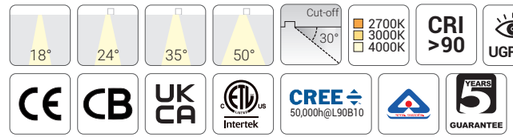


Quick Info

- Ceiling Cut-out: 45x45mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 24°, 35°, 50°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

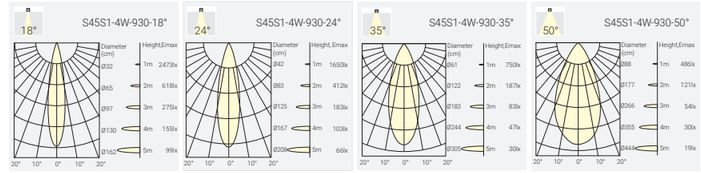

Order Info (SENSE S45 Trim Version in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	18°	480lm	330lm	SUS1-9271804N-WM
						24°	480lm	330lm	SUS1-9272404N-WM
						35°	480lm	330lm	SUS1-9273504N-WM
						50°	480lm	330lm	SUS1-9275004N-WM
					3000K	18°	500lm	350lm	SUS1-9303804N-WM
						24°	500lm	350lm	SUS1-9302404N-WM
						35°	500lm	350lm	SUS1-9303504N-WM
						50°	500lm	350lm	SUS1-9305004N-WM
					4000K	18°	550lm	380lm	SUS1-9401804N-WM
						24°	550lm	380lm	SUS1-9402404N-WM
						35°	550lm	380lm	SUS1-9403504N-WM
						50°	550lm	380lm	SUS1-9405004N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Black White Matt

Optional accessory



Code for SUS1-9305004N-WM with Honeycomb
SUS1-9305004N-WM-H

Honeycomb

Coding

SUS1	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**		**Trim Finish**	**Reflector Color**		**Accessory**
SUS1		927	18	04	N		W	B		H
S45S1		CRI90/ 2700K	18°	4W	No Driver		White	Black		Honeycomb
		930	24		F		B	M		
		CRI90/ 3000K	24°		On-Off		Black	Matt		
		940	35		P			W		
		CRI90/ 4000K	35°		Phase Dim			White		
			50		A					
			50°		0-10V Dim					
					D					
					DALI Dim					

New

LED Module



SENSE 55
IP54

SENSE 55H
IP54

SENSE 55L
IP54

Trim



Round Trim



Round El-Trimless

Accessory



Honeycomb



Diffusion Filter

+



Honeycomb



Linear Spread Filter

Reflector



IP20



IP54



Specular



Matt



White



Black



Dark Light



Gold


SENSE S55R1-G2 – Adjustable Downlight with Seamless Gradient Lighting


New




Trimless









Trim Finish



White Black

Reflector Options




Specular Matt White Black Dark Light Gold

Optional accessory



Honeycomb

Code for SXR1G2-9303607N-WB with Honeycomb
SXR1G2-9303607N-WB-H

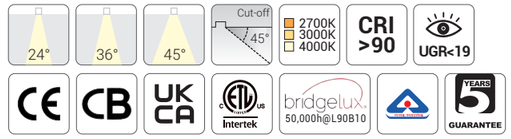


Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø55mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 630lm System Luminous Flux
- IP Class: IP20 (LED Module IP54); IP54 from front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

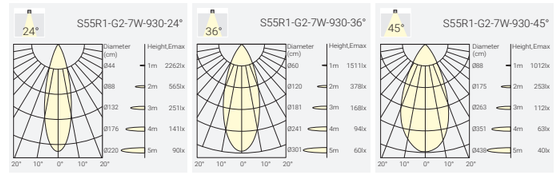

Order Info (SENSE S55R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	8.5W	33V	200mA	90	2700K	24°	850lm	500lm	SXR1G2-9272407N-WB
						36°	850lm	550lm	SXR1G2-9273607N-WB
						45°	850lm	550lm	SXR1G2-9274507N-WB
					3000K	24°	900lm	530lm	SXR1G2-9302407N-WB
						36°	900lm	600lm	SXR1G2-9303607N-WB
						45°	900lm	600lm	SXR1G2-9304507N-WB
					4000K	24°	950lm	550lm	SXR1G2-9402407N-WB
						36°	950lm	630lm	SXR1G2-9403607N-WB
						45°	950lm	630lm	SXR1G2-9404507N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SXR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SXR1G2 SENSE S55R1-G2 Trim Version	**927** CRI90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
EXR1G2 SENSE S55RT1-EI-G2 EI-Trimless Version	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

SENSE S55HR1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New



Trimless





24° 36° 45° Cut-off 45° 2700K 3000K 4000K CRI >90 UGR<19


CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 YEARS GUARANTEE

Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø55mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 10W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 880lm System Luminous Flux
- IP Class: IP20 (LED Module IP54); IP54 from front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

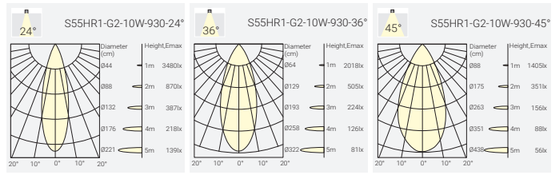

Order Info (SENSE S55HR1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10W	12W	34V	300mA	90	2700K	24°	1200lm	750lm	SXR1G2-9272410N-WB
						36°	1200lm	800lm	SXR1G2-9273610N-WB
						45°	1200lm	800lm	SXR1G2-9274510N-WB
					3000K	24°	1300lm	800lm	SXR1G2-9302410N-WB
						36°	1300lm	850lm	SXR1G2-9303610N-WB
						45°	1300lm	850lm	SXR1G2-9304510N-WB
					4000K	24°	1400lm	820lm	SXR1G2-9402410N-WB
						36°	1400lm	880lm	SXR1G2-9403610N-WB
						45°	1400lm	880lm	SXR1G2-9404510N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Optional accessory



Code for SXR1G2-9303610N-WB with Honeycomb SXR1G2-9303610N-WB-H

Honeycomb

Coding

SXR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SXR1G2 SENSE S55HR1-G2 Trim Version	**927** CRI90/ 2700K	**24** 24°	**10** 10W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
EXR1G2 SENSE S55HRT1-EI-G2 EI-Trimless Version	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

SENSE S55LR1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New



Trimless





24° 36° 45° Cut-off 45° 2700K 3000K 4000K CRI >90 UGR<19

CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 YEARS GUARANTEE

Quick Info


- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø55mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 8W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 780lm System Luminous Flux
- IP Class: IP20 (LED Module IP54); IP54 from front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K

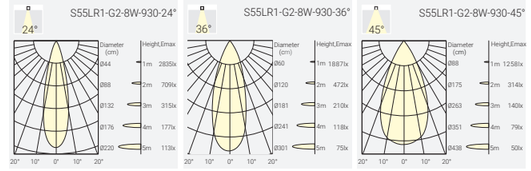

Order Info (SENSE S55LR1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	90	2700K	24°	1000lm	650lm	SFR1G2-9272408N-WB
						36°	1000lm	700lm	SFR1G2-9273608N-WB
						45°	1000lm	700lm	SFR1G2-9274508N-WB
					3000K	24°	1100lm	670lm	SFR1G2-9302408N-WB
						36°	1100lm	750lm	SFR1G2-9303608N-WB
						45°	1100lm	750lm	SFR1G2-9304508N-WB
					4000K	24°	1200lm	700lm	SFR1G2-9402408N-WB
						36°	1200lm	780lm	SFR1G2-9403608N-WB
						45°	1200lm	780lm	SFR1G2-9404508N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Optional accessory



Code for SFR1G2-9303608N-WB with Honeycomb SFR1G2-9303608N-WB-H

Honeycomb

Coding

SFR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SFR1G2 SENSE S55LR1-G2 Trim Version	**927** CRI90/ 2700K	**24** 24°	**08** 8W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
EFR1G2 SENSE S55LRT1-EI-G2 EI-Trimless Version	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**M** Matt	
	940 CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

SENSE 68-G2 – Modular Design Architectural Downlight

LED Engine



S68G2 LED Engine

Accessory




Honeycomb



Diffusion Cover

Trim



Round Trim



Round Trimless



Round EI-Trimless



Square Trim



Square Trimless



Square EI-Trimless

Reflector



Black Dark Light Gold White Specular Matt



Black Dark Light Gold White Specular Matt

Model



S68R1-G2




S68RT1-G2



S68RT1-EI-G2




S68S1-G2



S68ST1-G2





S68ST1-EI-G2

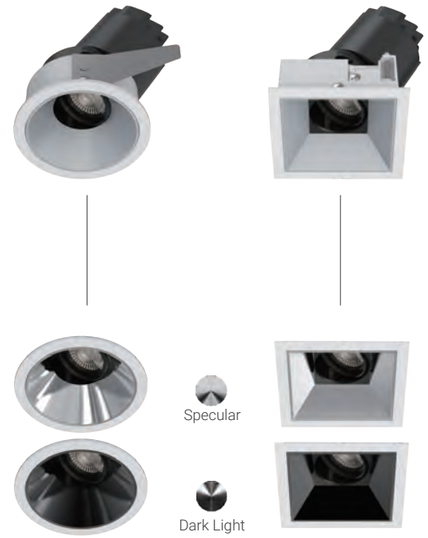

SENSE S68R1-G2 – Modular Design Architectural Downlight



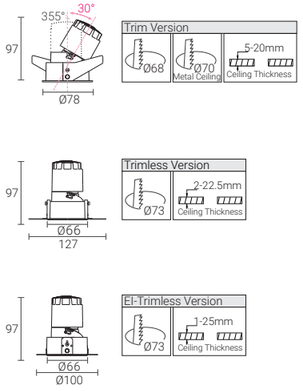

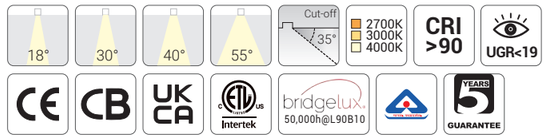


Quick Info

- Ceiling Cut-out: Ø68mm (Metal Ceiling : Ø70mm) for Trim Version
- Trimless Version also Available
- Bridgelux LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 40°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

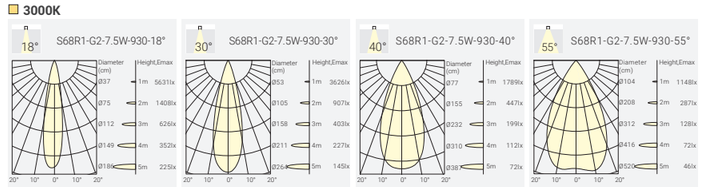

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	34V	250mA	90	2700K	18°	1000lm	900lm	STR1G2-9271808N-WC
						30°	1000lm	900lm	STR1G2-9273008N-WC
						40°	1000lm	850lm	STR1G2-9274008N-WC
						55°	1000lm	850lm	STR1G2-9275508N-WC
					3000K	18°	1100lm	950lm	STR1G2-9301808N-WC
						30°	1100lm	950lm	STR1G2-9303008N-WC
						40°	1100lm	900lm	STR1G2-9304008N-WC
						55°	1100lm	900lm	STR1G2-9305508N-WC
					4000K	18°	1200lm	1000lm	STR1G2-9401808N-WC
						30°	1200lm	1000lm	STR1G2-9403008N-WC
						40°	1200lm	950lm	STR1G2-9404008N-WC
						55°	1200lm	950lm	STR1G2-9405508N-WC
11W	13W	34V	300mA	90	2700K	18°	1200lm	1100lm	STR1G2-9271811N-WC
						30°	1200lm	1100lm	STR1G2-9273011N-WC
						40°	1200lm	1050lm	STR1G2-9274011N-WC
						55°	1200lm	1050lm	STR1G2-9275511N-WC
					3000K	18°	1300lm	1150lm	STR1G2-9301811N-WC
						30°	1300lm	1150lm	STR1G2-9303011N-WC
						40°	1300lm	1100lm	STR1G2-9301411N-WC
						55°	1300lm	1100lm	STR1G2-9305511N-WC
					4000K	18°	1400lm	1200lm	STR1G2-9401811N-WC
						30°	1400lm	1200lm	STR1G2-9403011N-WC
						40°	1400lm	1150lm	STR1G2-9404011N-WC
						55°	1400lm	1150lm	STR1G2-9405511N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for STR1G2-9305511N-WM with Honeycomb
STR1G2-9305511N-WM-H

Honeycomb


Coding

STR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STR1G2 S68R1-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STR3G2 S68RT1-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
ETR1G2 S68RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		55 55°		**A** 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Light Distribution

3000K



Order Info (SENSE 68 -G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	35V	200mA	90	2700K	12°	800lm	450lm	STR1G2-9271206N-WC
					3000K	12°	850lm	480lm	STR1G2-9301206N-WC
					4000K	12°	900lm	500lm	STR1G2-9401206N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding


STR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STR1G2 S68R1-G2 Trim Version	**927** CRI90/ 2700K	**12** 12°	**06** 6W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STR3G2 S68RT1-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ETR1G2 S68RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S68S1-G2 – Modular Design Architectural Downlight



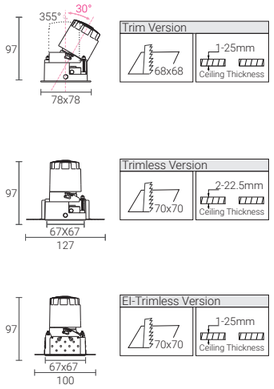

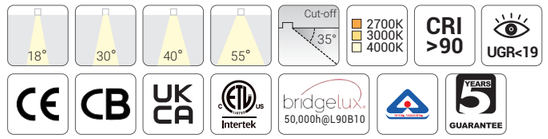


Quick Info

- Ceiling Cut-out: 68x68mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 7.5W/ 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 40°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

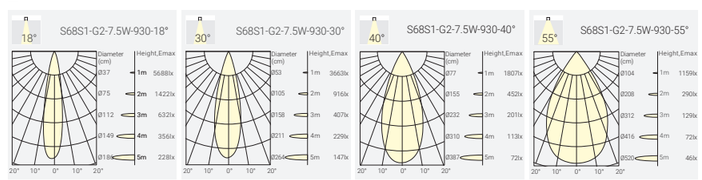

Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	34V	250mA	90	2700K	18°	1000lm	900lm	STS1G2-9271808N-WC
						30°	1000lm	900lm	STS1G2-9273008N-WC
						40°	1000lm	850lm	STS1G2-9274008N-WC
						55°	1000lm	850lm	STS1G2-9275508N-WC
					3000K	18°	1100lm	950lm	STS1G2-9301808N-WC
						30°	1100lm	950lm	STS1G2-9303008N-WC
						40°	1100lm	900lm	STS1G2-9304008N-WC
						55°	1100lm	900lm	STS1G2-9305508N-WC
					4000K	18°	1200lm	1000lm	STS1G2-9401808N-WC
						30°	1200lm	1000lm	STS1G2-9403008N-WC
						40°	1200lm	950lm	STS1G2-9404008N-WC
						55°	1200lm	950lm	STS1G2-9405508N-WC
11W	13W	34V	300mA	90	2700K	18°	1200lm	1100lm	STS1G2-9271811N-WC
						30°	1200lm	1100lm	STS1G2-9273011N-WC
						40°	1200lm	1050lm	STS1G2-9274011N-WC
						55°	1200lm	1050lm	STS1G2-9275511N-WC
					3000K	18°	1300lm	1150lm	STS1G2-9301811N-WC
						30°	1300lm	1150lm	STS1G2-9303011N-WC
						40°	1300lm	1100lm	STS1G2-9301411N-WC
						55°	1300lm	1100lm	STS1G2-9305511N-WC
					4000K	18°	1400lm	1200lm	STS1G2-9401811N-WC
						30°	1400lm	1200lm	STS1G2-9403011N-WC
						40°	1400lm	1150lm	STS1G2-9404011N-WC
						55°	1400lm	1150lm	STS1G2-9405511N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for STS1G2-9304004N-WM with Honeycomb
STS1G2-9304004N-WM-H

Honeycomb


Coding

STS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STS1G2 S68S1-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STS3G2 S68ST1-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
ETS1G2 S68ST1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		55 55°		**A** 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Light Distribution

3000K



Order Info (SENSE 68-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	35V	200mA	90	2700K	12°	800lm	450lm	STS1G2-9271206N-WC
					3000K	12°	850lm	480lm	STS1G2-9301206N-WC
					4000K	12°	900lm	500lm	STS1G2-9401206N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

STS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
STS1G2 S68S1-G2 Trim Version	**927** CRI90/ 2700K	**12** 12°	**06** 6W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
STS3G2 S68ST1-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
ETS1G2 S68ST1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S75R1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New

SENSE 75


Honeycomb


Diffusion Filter


LED Module
IP20/IP54



Diffusion Filter+Honeycomb

Trim



Round Trim


Round-EI Trimless


Square Trim


Square-EI Trimless


Square Trim


Square-EI Trimless

Engine Holder





Reflector


Specular Matt White Black Dark Light Gold


Specular Matt White Black Dark Light Gold

SENSE S75R1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New





24° 36° 50° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 YEARS 5 GUARANTEE


Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: Ø75mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 9W/13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20 (LED Module IP20/IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim










Light Distribution

3000K

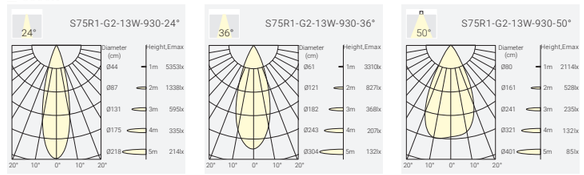

Order Info (SENSE S75R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	24°	1000lm	750lm	SGR1G2-9272409N-WB
						36°	1000lm	800lm	SGR1G2-9273609N-WB
						50°	1000lm	800lm	SGR1G2-9275009N-WB
					3000K	24°	1100lm	800lm	SGR1G2-9302409N-WB
						36°	1100lm	850lm	SGR1G2-9303609N-WB
						50°	1100lm	850lm	SGR1G2-9305009N-WB
					4000K	24°	1200lm	850lm	SGR1G2-9402409N-WB
						36°	1200lm	900lm	SGR1G2-9403609N-WB
						50°	1200lm	900lm	SGR1G2-9405009N-WB
13W	15W	34V	350mA	90	2700K	24°	1400lm	1050lm	SGR1G2-9272413N-WB
						36°	1400lm	1150lm	SGR1G2-9273613N-WB
						50°	1400lm	1150lm	SGR1G2-9275013N-WB
					3000K	24°	1500lm	1100lm	SGR1G2-9302413N-WB
						36°	1500lm	1200lm	SGR1G2-9303613N-WB
						50°	1500lm	1200lm	SGR1G2-9305013N-WB
					4000K	24°	1600lm	1150lm	SGR1G2-9402413N-WB
						36°	1600lm	1250lm	SGR1G2-9403613N-WB
						50°	1600lm	1250lm	SGR1G2-9405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Optional accessory



Code for SGR1G2-9303613N-WB with Honeycomb SGR1G2-9303613N-WB-H

Honeycomb

Coding

SGR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SGR1G2 SENSE S75R1-G2 Trim Version	**927** CRI90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
SGR4G2 SENSE S75RT1-G2 Trimless Version	**930** CRI90/ 3000K	**36** 36°	**13** 13W	**F** On-Off	**B** Black	**M** Matt	
EGR1G2 SENSE S75RT1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

SENSE S75S1-G2 – Adjustable Downlight with Seamless Gradient Lighting

New





24° 36° 50° Cut-off 44° 2700K 3000K 4000K CRI >90 UGR<19


CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 YEARS 5 GUARANTEE


Quick Info

- The exceptionally soft beam with seamless gradient enhances the architectural lines on the wall, lending it a touch of elegance.
- Ceiling Cut-out: 75x75mm for Trim Version
- Bridgelux LED, 2-Step SDCM, 9W/13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20 (LED Module IP20/IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim










Light Distribution

3000K

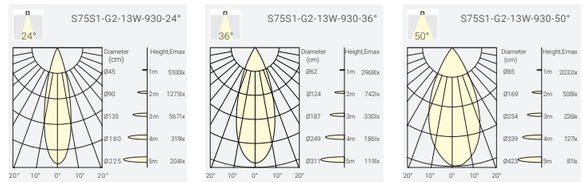

Order Info (SENSE S75R1-G2 Trim Version in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	24°	1000lm	750lm	SGS1G2-9272409N-WB
						36°	1000lm	800lm	SGS1G2-9273609N-WB
						50°	1000lm	800lm	SGS1G2-9275009N-WB
					3000K	24°	1100lm	800lm	SGS1G2-9302409N-WB
						36°	1100lm	850lm	SGS1G2-9303609N-WB
						50°	1100lm	850lm	SGS1G2-9305009N-WB
					4000K	24°	1200lm	850lm	SGS1G2-9402409N-WB
						36°	1200lm	900lm	SGS1G2-9403609N-WB
						50°	1200lm	900lm	SGS1G2-9405009N-WB
13W	15W	34V	350mA	90	2700K	24°	1400lm	1050lm	SGS1G2-9272413N-WB
						36°	1400lm	1150lm	SGS1G2-9273613N-WB
						50°	1400lm	1150lm	SGS1G2-9275013N-WB
					3000K	24°	1500lm	1100lm	SGS1G2-9302413N-WB
						36°	1500lm	1200lm	SGS1G2-9303613N-WB
						50°	1500lm	1200lm	SGS1G2-9305013N-WB
					4000K	24°	1600lm	1150lm	SGS1G2-9402413N-WB
						36°	1600lm	1250lm	SGS1G2-9403613N-WB
						50°	1600lm	1250lm	SGS1G2-9405013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt White Black Dark Light Gold

Optional accessory



Code for SGS1G2-9303613N-WB with Honeycomb SGS1G2-9303613N-WB-H

Honeycomb

Coding

SGS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SGS1G2 SENSE S75S1-G2 Trim Version	**927** CRI90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**S** Specular	**H** Honeycomb
SGS4G2 SENSE S75ST1-G2 Trimless Version	**930** CRI90/ 3000K	**36** 36°	**13** 13W	**F** On-Off	**B** Black	**M** Matt	
EGS1G2 SENSE S75ST1-EI-G2 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**B** Black	
				D DALI Dim		**C** Dark Light	
						G Gold	

SENSE 100-G2 – Modular Design Architectural Downlight System



S100G2 LED Engine

Adjustable/ Fixed



S100HG2 LED Engine

Adjustable/ Fixed

Trim



Round Trim



Round Trimless



Round EI-Trimless



Square Trim



Square Trimless



Square EI-Trimless

Accessory



Honeycomb



Linear Spread Filter



Diffusion Filter



Honeycomb



Linear Spread Filter



Diffusion Filter

Reflector



Round Adjustable



Round Fixed (Horn Type)



Round Fixed



Square Adjustable



Square Fixed

Anti-Glare Ring



(Straight Type)



(Curve Type,Option)



(Straight Type)



(Curve Type,Option)

Second Accessory



(Option)



(Option)

Model



S100R1-G2



S100R1-G2-CA



S100R7-G2



S100R2-G2



S100S1-G2



S100S1-G2-CA



S100S2-G2

Secondary Reflector




Specular Dark Light Matt White Black Gold

SENSE S100R1-G2 – Modular Design Architectural Downlight




Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 7W, 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 10°, 18°, 30°, 45°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

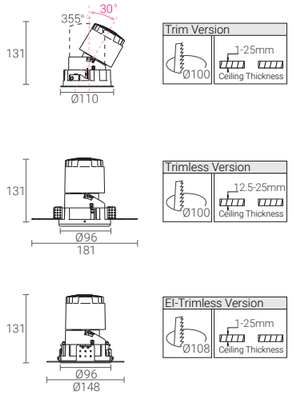

Light Distribution

3000K

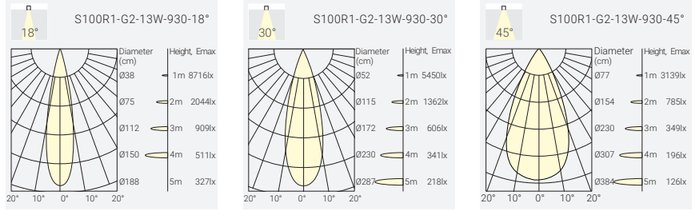

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1350lm	SSR1G2-9271813N-WC
						30°	1700lm	1500lm	SSR1G2-9273013N-WC
						45°	1700lm	1450lm	SSR1G2-9274513N-WC
					3000K	18°	1800lm	1400lm	SSR1G2-9301813N-WC
						30°	1800lm	1600lm	SSR1G2-9303013N-WC
						45°	1800lm	1500lm	SSR1G2-9304513N-WC
					4000K	18°	1900lm	1450lm	SSR1G2-9401813N-WC
						30°	1900lm	1650lm	SSR1G2-9403013N-WC
						45°	1900lm	1550lm	SSR1G2-9404513N-WC
18W	21W	35V	500mA	90	2700K	18°	2400lm	1850lm	SSR1G2-9271818N-WC
						30°	2400lm	2100lm	SSR1G2-9273018N-WC
						45°	2400lm	2050lm	SSR1G2-9274518N-WC
					3000K	18°	2500lm	1900lm	SSR1G2-9301818N-WC
						30°	2500lm	2150lm	SSR1G2-9303018N-WC
						45°	2500lm	2100lm	SSR1G2-9304518N-WC
					4000K	18°	2600lm	2000lm	SSR1G2-9401818N-WC
						30°	2600lm	2200lm	SSR1G2-9403018N-WC
						45°	2600lm	2150lm	SSR1G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SSR1G2-9304018N-WM with Honeycomb
SSR1G2-9304018N-WM-H

Honeycomb


Coding

SSR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR1G2 SENSE 100-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR4G2 SENSE 100-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR1G2 SENSE 100-G2 EI-Trimless Version	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Light Distribution

3000K



Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	35V	200mA	90	2700K	10°	800lm	620lm	SSR1G2-9271007N-WC
					3000K	10°	850lm	650lm	SSR1G2-9301007N-WC
					4000K	10°	900lm	680lm	SSR1G2-9401007N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding

SSR1G2 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR1G2 SENSE 100-G2 Trim Version	**927** CRI90/ 2700K	**10** 10°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR4G2 SENSE 100-G2 Trimless Version	**930** CRI90/ 3000K			**F** On-Off	**B** Black	**M** Matt	
EXR1G2 SENSE 100-G2 EI-Trimless Version	**940** CRI90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100S1-G2 – Modular design architectural downlight



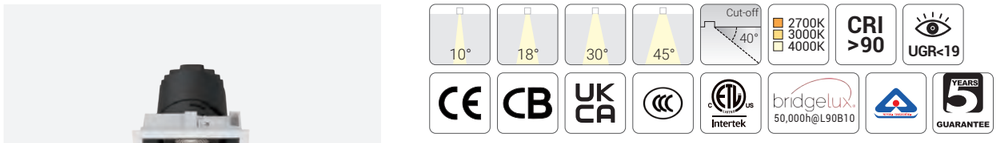


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 7W, 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 10°, 18°, 30°, 45°
- Lumen Output: Up to 2150lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

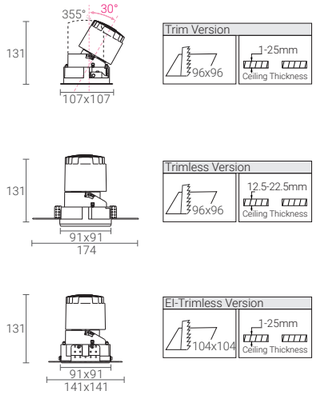

Light Distribution

3000K

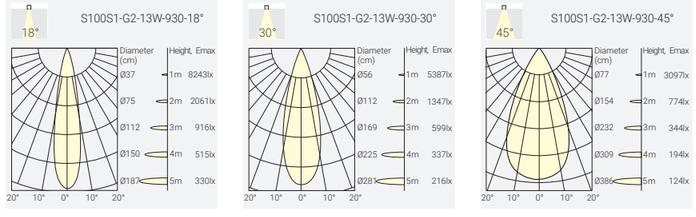

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1300lm	SSS1G2-9271813N-WC
						30°	1700lm	1450lm	SSS1G2-9273013N-WC
						45°	1700lm	1400lm	SSS1G2-9274513N-WC
					3000K	18°	1800lm	1350lm	SSS1G2-9301813N-WC
						30°	1800lm	1550lm	SSS1G2-9303013N-WC
						45°	1800lm	1450lm	SSS1G2-9304513N-WC
					4000K	18°	1900lm	1400lm	SSS1G2-9401813N-WC
						30°	1900lm	1600lm	SSS1G2-9403013N-WC
						45°	1900lm	1500lm	SSS1G2-9404513N-WC
18W	21W	35V	500mA	90	2700K	18°	2400lm	1800lm	SSS1G2-9271818N-WC
						30°	2400lm	2050lm	SSS1G2-9273018N-WC
						45°	2400lm	2000lm	SSS1G2-9274518N-WC
					3000K	18°	2500lm	1850lm	SSS1G2-9301818N-WC
						30°	2500lm	2100lm	SSS1G2-9303018N-WC
						45°	2500lm	2050lm	SSS1G2-9304518N-WC
					4000K	18°	2600lm	1950lm	SSS1G2-9401818N-WC
						30°	2600lm	2150lm	SSS1G2-9403018N-WC
						45°	2600lm	2100lm	SSS1G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SSS1G2-9301813N-WM with Honeycomb SSS1G2-9301813N-WM-H


Honeycomb

Coding

SSS1G2	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**		**Trim Finish**	**Reflector Color**		**Accessory**
SSS1G2 SENSE 100-G2 Trim Version		**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver		**W** White	**B** Black		**H** Honeycomb
SSS4G2 SENSE 100-G2 Trimless Version		**930** CRI90/ 3000K	**30** 30°	**18** 18W	**F** On-Off		**B** Black	**M** Matt		
ESS1G2 SENSE 100-G2 EI-Trimless Version		**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim			**W** White		
					A 0-10V Dim			**C** Dark Light		
					D DALI Dim			**G** Gold		
								S Specular		

Light Distribution

3000K



Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	35V	200mA	90	2700K	10°	800lm	620lm	SSS1G2-9271007N-WC
					3000K	10°	850lm	650lm	SSS1G2-9301007N-WC
					4000K	10°	900lm	680lm	SSS1G2-9401007N-WC


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SSS1G2	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**		**Trim Finish**	**Reflector Color**		**Accessory**
SSS1G2 SENSE 100-G2 Trim Version		**927** CRI90/ 2700K	**10** 10°	**07** 7W	**N** No Driver		**W** White	**B** Black		**H** Honeycomb
SSS4G2 SENSE 100-G2 Trimless Version		**930** CRI90/ 3000K			**F** On-Off		**B** Black	**M** Matt		
ESS1G2 SENSE 100-G2 EI-Trimless Version		**940** CRI90/ 4000K			**P** Phase Dim			**W** White		
					A 0-10V Dim			**C** Dark Light		
					D DALI Dim			**G** Gold		
								S Specular		


SENSE S100HR1-G2 – Modular Design Architectural Downlight



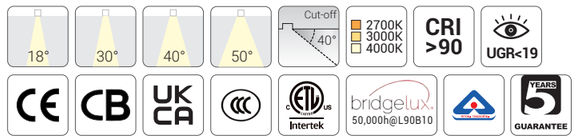


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 40°, 50°
- Lumen Output: Up to 2500lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

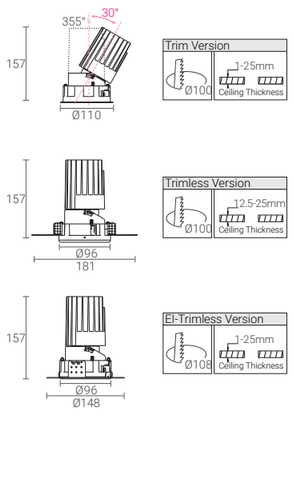

Light Distribution

3000K

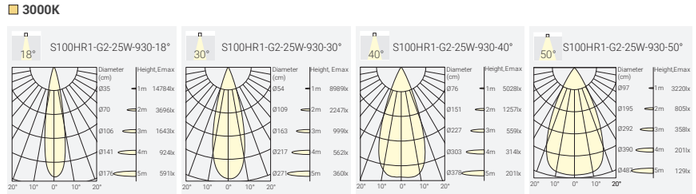

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	18°	2900lm	2100lm	SHR1G2-9271825N-WC
						30°	2900lm	2300lm	SHR1G2-9273025N-WC
						40°	2900lm	2250lm	SHR1G2-9274025N-WC
						50°	2900lm	2200lm	SHR1G2-9275025N-WC
					3000K	18°	3000lm	2200lm	SHR1G2-9301825N-WC
						30°	3000lm	2400lm	SHR1G2-9303025N-WC
						40°	3000lm	2350lm	SHR1G2-9304025N-WC
						50°	3000lm	2300lm	SHR1G2-9305025N-WC
					4000K	18°	3100lm	2300lm	SHR1G2-9401825N-WC
						30°	3100lm	2500lm	SHR1G2-9403025N-WC
						40°	3100lm	2400lm	SHR1G2-9404025N-WC
						50°	3100lm	2350lm	SHR1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SHR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR1G2 SENSE 100H-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR4G2 SENSE 100H-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
EHR1G2 SENSE 100H-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		50 50°		**A** 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessory




Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-H

Honeycomb


SENSE S100HS1-G2 – Modular Design Architectural Downlight



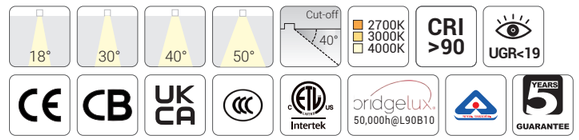


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90, Bridgelux
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 40°, 50°
- Lumen Output: Up to 2500lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

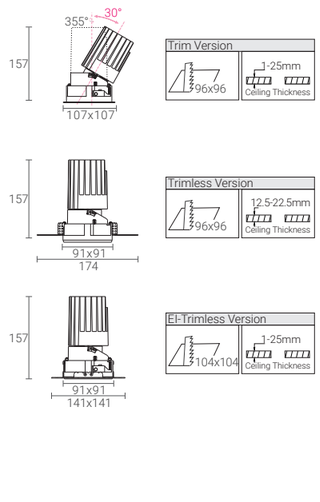

Light Distribution

3000K

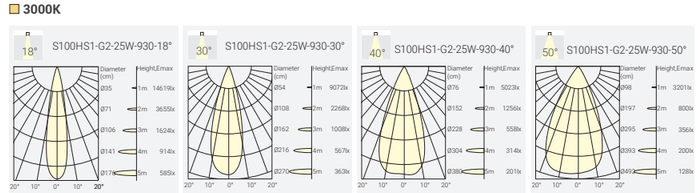

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	18°	2900lm	2100lm	SHS1G2-9271825N-WC
						30°	2900lm	2300lm	SHS1G2-9273025N-WC
						40°	2900lm	2250lm	SHS1G2-9274025N-WC
						50°	2900lm	2200lm	SHS1G2-9275025N-WC
					3000K	18°	3000lm	2200lm	SHS1G2-9301825N-WC
						30°	3000lm	2400lm	SHS1G2-9303025N-WC
						40°	3000lm	2350lm	SHS1G2-9304025N-WC
						50°	3000lm	2300lm	SHS1G2-9305025N-WC
					4000K	18°	3100lm	2300lm	SHS1G2-9401825N-WC
						30°	3100lm	2500lm	SHS1G2-9403025N-WC
						40°	3100lm	2400lm	SHS1G2-9404025N-WC
						50°	3100lm	2350lm	SHS1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Coding

SHS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHS1G2 SENSE 100H-G2 Trim Version	**927** CRI90/ 2700K	**18** 18°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHS4G2 SENSE 100H-G2 Trimless Version	**930** CRI90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**M** Matt	
EHS1G2 SENSE 100H-G2 EI-Trimless Version	**940** CRI90/ 4000K	**40** 40°		**P** Phase Dim		**W** White	
		50 50°		**A** 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

Optional accessory



Code for SHS1G2-9301825N-WM with Honeycomb
SHS1G2-9301825N-WM-H

Honeycomb

SENSE S100R7-G2 – Modular Design Architectural Downlight




20° 40° 50° Cut-off 40° 2700K 3000K 4000K CRI >90 UGR<19

CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 GUARANTEE 5 YEARS


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 2150lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

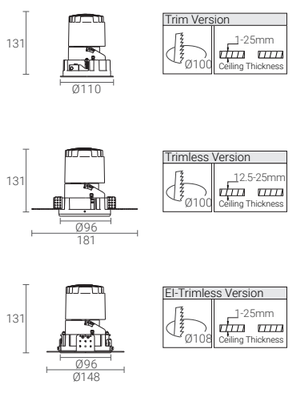

Light Distribution

3000K

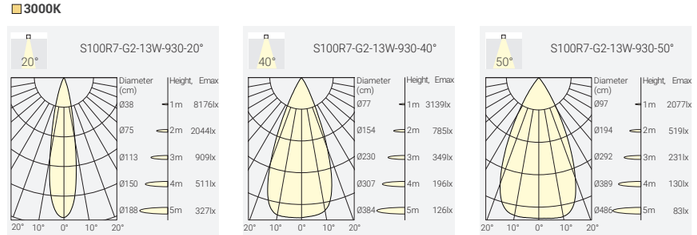

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°	1700lm	1350lm	SSR7G2-9272013N-WC
						40°	1700lm	1450lm	SSR7G2-9274013N-WC
						50°	1700lm	1450lm	SSR7G2-9275013N-WC
					3000K	20°	1800lm	1400lm	SSR7G2-9302013N-WC
						40°	1800lm	1500lm	SSR7G2-9304013N-WC
						50°	1800lm	1500lm	SSR7G2-9305013N-WC
					4000K	20°	1900lm	1450lm	SSR7G2-9402013N-WC
						30°	1900lm	1550lm	SSR7G2-9404013N-WC
						50°	1900lm	1550lm	SSR7G2-9405013N-WC
18W	21W	35V	500mA	90	2700K	20°	2400lm	1850lm	SSR7G2-9272018N-WC
						40°	2400lm	2000lm	SSR7G2-9274018N-WC
						50°	2400lm	2000lm	SSR7G2-9275018N-WC
					3000K	20°	2500lm	1900lm	SSR7G2-9302018N-WC
						40°	2500lm	2100lm	SSR7G2-9304018N-WC
						50°	2500lm	2100lm	SSR7G2-9305018N-WC
					4000K	20°	2600lm	2000lm	SSR7G2-9402018N-WC
						40°	2600lm	2150lm	SSR7G2-9404018N-WC
						50°	2600lm	2150lm	SSR7G2-9405018N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SSR7G2-9304013N-WM with Honeycomb
SSR7G2-9304013N-WM-H

Honeycomb

Coding

SSR7G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR7G2 SENSE 100-G2 Trim Version	**927** CRI90/ 2700K	**20** 20°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR8G2 SENSE 100-G2 Trimless Version	**930** CRI90/ 3000K	**40** 40°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR7G2 SENSE 100-G2 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S100HR7-G2 – Modular Design Architectural Downlight




20° 40° 50° Cut-off 40° 2700K 3000K 4000K CRI >90 UGR<19

CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 GUARANTEE 5 YEARS


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°,40°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

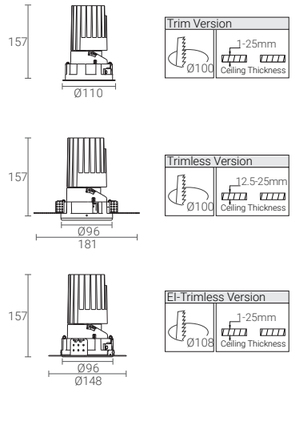

Light Distribution

3000K

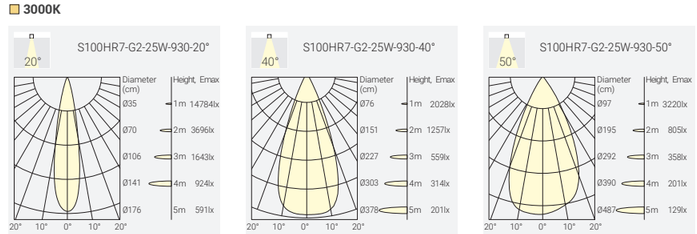

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	20°	2900lm	2100lm	SHR7G2-9272025N-WC
						40°	2900lm	2200lm	SHR7G2-9274025N-WC
						50°	2900lm	2200lm	SHR7G2-9275025N-WC
					3000K	20°	3000lm	2200lm	SHR7G2-9302025N-WC
						40°	3000lm	2300lm	SHR7G2-9304025N-WC
						50°	3000lm	2300lm	SHR7G2-9305025N-WC
					4000K	20°	3100lm	2300lm	SHR7G2-9402025N-WC
						40°	3100lm	2400lm	SHR7G2-9404025N-WC
						50°	3100lm	2400lm	SHR7G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SHR1G2-9304025N-WM with Honeycomb
SHR1G2-9304025N-WM-H

Honeycomb


Coding

SHR7G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR7G2 SENSE 100H-G2 Trim Version	**927** CRI90/ 2700K	**20** 20°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR8G2 SENSE 100H-G2 Trimless Version	**930** CRI90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**M** Matt	
EHR7G2 SENSE 100H-G2 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100R2-G2 – Modular Design Architectural Downlight



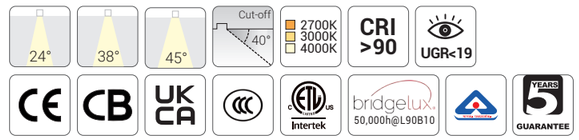


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 45°
- Lumen Output: Up to 1900lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

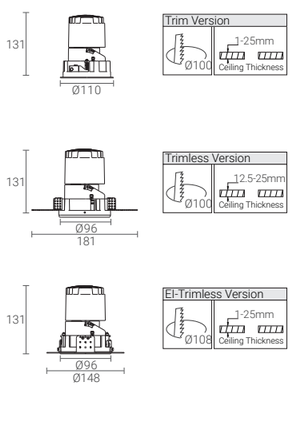

Light Distribution

3000K

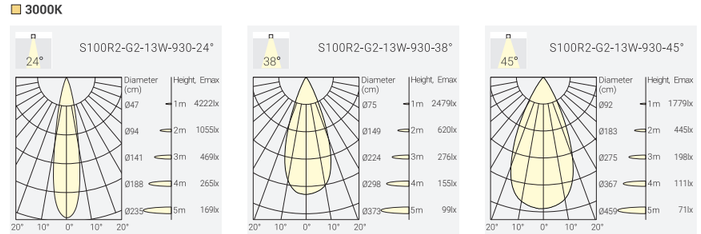

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	24°	1700lm	1200lm	SSR2G2-9272413N-WC
						38°	1700lm	1300lm	SSR2G2-9273813N-WC
						45°	1700lm	1250lm	SSR2G2-9274513N-WC
					3000K	24°	1800lm	1250lm	SSR2G2-9302413N-WC
						38°	1800lm	1350lm	SSR2G2-9303813N-WC
						45°	1800lm	1300lm	SSR2G2-9304513N-WC
					4000K	24°	1900lm	1300lm	SSR2G2-9402413N-WC
						38°	1900lm	1400lm	SSR2G2-9403813N-WC
						45°	1900lm	1350lm	SSR2G2-9404513N-WC
18W	21W	35V	500mA	90	2700K	24°	2400lm	1650lm	SSR2G2-9272418N-WC
						38°	2400lm	1800lm	SSR2G2-9273818N-WC
						45°	2400lm	1750lm	SSR2G2-9274518N-WC
					3000K	24°	2500lm	1700lm	SSR2G2-9302418N-WC
						38°	2500lm	1850lm	SSR2G2-9303818N-WC
						45°	2500lm	1800lm	SSR2G2-9304518N-WC
					4000K	24°	2600lm	1750lm	SSR2G2-9402418N-WC
						38°	2600lm	1900lm	SSR2G2-9403818N-WC
						45°	2600lm	1850lm	SSR2G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SSR2G2-9303818N-WM with Honeycomb
SSR2G2-9303818N-WM-H

Honeycomb


Coding

SSR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSR2G2 SENSE 100-G2 Trim Version	**927** CRI90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSR5G2 SENSE 100-G2 Trimless Version	**930** CRI90/ 3000K	**38** 38°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESR2G2 SENSE 100-G2 EI-Trimless Version	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100HR2-G2 – Modular Design Architectural Downlight



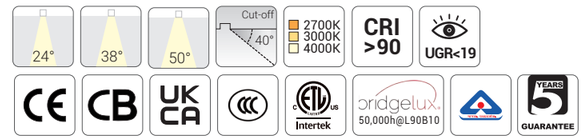


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2150lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

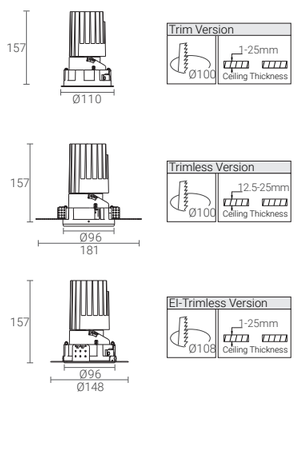

Light Distribution

3000K

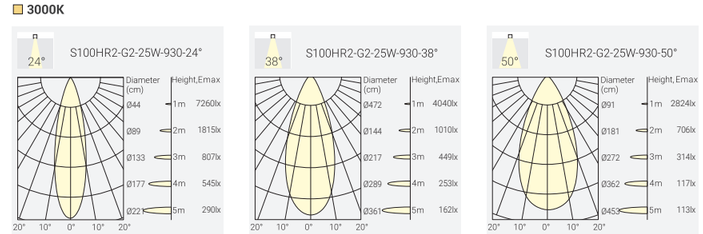

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	24°	2900lm	1850lm	SHR2G2-9272425N-WC
						38°	2900lm	2000lm	SHR2G2-9273825N-WC
						50°	2900lm	1950lm	SHR2G2-9275025N-WC
					3000K	24°	3000lm	1950lm	SHR2G2-9302425N-WC
						38°	3000lm	2100lm	SHR2G2-9303825N-WC
						50°	3000lm	2000lm	SHR2G2-9305025N-WC
					4000K	24°	3100lm	2000lm	SHR2G2-9402425N-WC
						38°	3100lm	2150lm	SHR2G2-9403825N-WC
						50°	3100lm	2100lm	SHR2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SHR2G2-9305025N-WM with Honeycomb
SHR2G2-9305025N-WM-H

Honeycomb


Coding

SHR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHR2G2 SENSE 100H-G2 Trim Version	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHR5G2 SENSE 100H-G2 Trimless Version	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**M** Matt	
EHR5G2 SENSE 100H-G2 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100S2-G2 – Modular Design Architectural Downlight



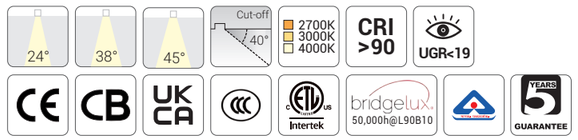


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 45°
- Lumen Output: Up to 1850lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

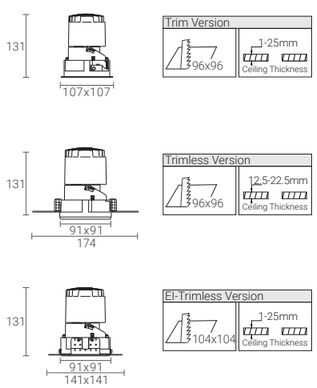

Light Distribution

3000K

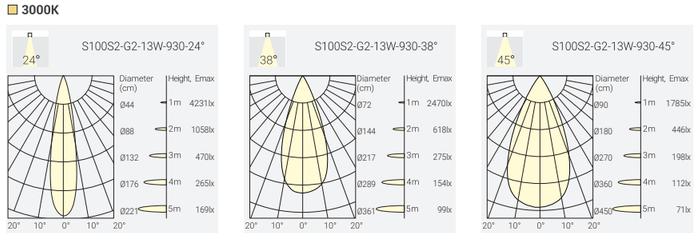

Order Info (SENSE 100-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	24°	1700lm	1100lm	SSS2G2-9272413N-WC
						38°	1700lm	1250lm	SSS2G2-9273813N-WC
						45°	1700lm	1200lm	SSS2G2-9274513N-WC
					3000K	24°	1800lm	1150lm	SSS2G2-9302413N-WC
						38°	1800lm	1300lm	SSS2G2-9303813N-WC
						45°	1800lm	1250lm	SSS2G2-9304513N-WC
					4000K	24°	1900lm	1200lm	SSS2G2-9402413N-WC
						38°	1900lm	1350lm	SSS2G2-9403813N-WC
						45°	1900lm	1300lm	SSS2G2-9404513N-WC
18W	21W	35V	500mA	90	2700K	24°	2400lm	1550lm	SSS2G2-9272418N-WC
						38°	2400lm	1750lm	SSS2G2-9273818N-WC
						50°	2400lm	1700lm	SSS2G2-9274518N-WC
					3000K	24°	2500lm	1600lm	SSS2G2-9302418N-WC
						38°	2500lm	1800lm	SSS2G2-9303818N-WC
						45°	2500lm	1750lm	SSS2G2-9304518N-WC
					4000K	24°	2600lm	1650lm	SSS2G2-9402418N-WC
						38°	2600lm	1850lm	SSS2G2-9403818N-WC
						45°	2600lm	1800lm	SSS2G2-9404518N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SSS2G2-9302413N-WM with Honeycomb
SSS2G2-9302413N-WM-H

Honeycomb


Coding

SSS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SSS2G2 SENSE 100-G2 Trim Version	**927** CRI90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SSS5G2 SENSE 100-G2 Trimless Version	**930** CRI90/ 3000K	**38** 38°	**18** 18W	**F** On-Off	**B** Black	**M** Matt	
ESS2G2 SENSE 100-G2 EI-Trimless Version	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S100HS2-G2 – Modular Design Architectural Downlight



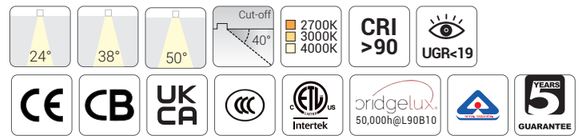


Quick Info

- Ceiling Cut-out: 96x96mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2100lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

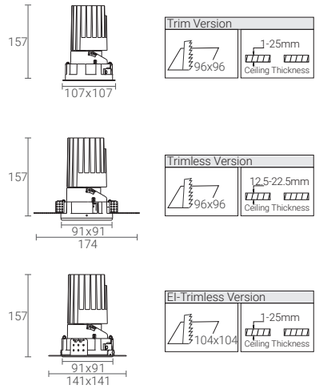

Light Distribution

3000K

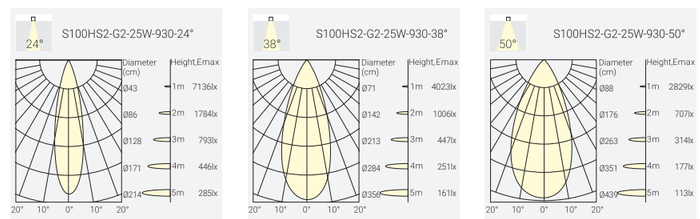

Order Info (SENSE 100H-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	34V	700mA	90	2700K	24°	2900lm	1750lm	SHS2G2-9272425N-WC
						38°	2900lm	1950lm	SHS2G2-9273825N-WC
						50°	2900lm	1850lm	SHS2G2-9275025N-WC
					3000K	24°	3000lm	1800lm	SHS2G2-9302425N-WC
						38°	3000lm	2000lm	SHS2G2-9303825N-WC
						50°	3000lm	1950lm	SHS2G2-9305025N-WC
					4000K	24°	3100lm	1900lm	SHS2G2-9402425N-WC
						38°	3100lm	2100lm	SHS2G2-9403825N-WC
						50°	3100lm	2000lm	SHS2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SHS2G2-9302425N-WM with Honeycomb
SHS2G2-9302425N-WM-H

Honeycomb

Coding

SHS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SHS2G2 SENSE 100-G2H Trim Version	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SHS5G2 SENSE 100H-G2 Trimless Version	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**M** Matt	
EHS5G2 SENSE 100H-G2 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE G2 – Modular Design Architectural Downlight System

Project: The Mist Hot Spring Hotel, Xuchang, China








Project: InterContinental Hotels & Resorts, Hefei, China




SENSE S125R1-G2 – Modular Design Architectural Downlight System



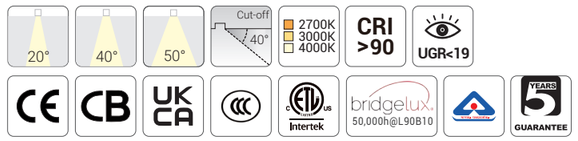


Quick Info

- Ceiling Cut-out: Ø125mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

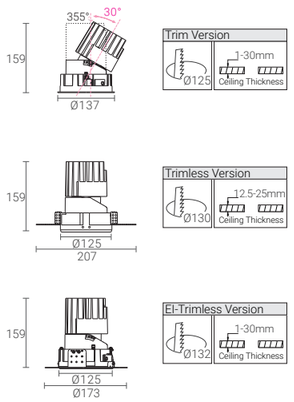

Light Distribution

3000K

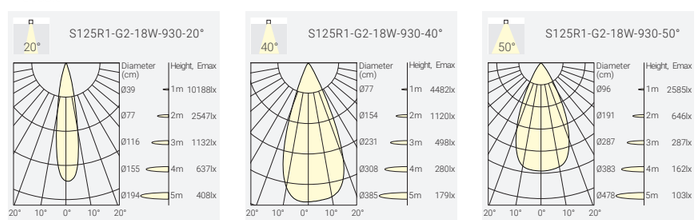

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	34V	500mA	90	2700K	20°	2600lm	1800lm	SMR1G2-9272018N-WC
						40°	2600lm	2000lm	SMR1G2-9274018N-WC
						50°	2600lm	1700lm	SMR1G2-9275018N-WC
					3000K	20°	2700lm	1900lm	SMR1G2-9302018N-WC
						40°	2700lm	2100lm	SMR1G2-9304018N-WC
						50°	2700lm	1850lm	SMR1G2-9305018N-WC
					4000K	20°	2800lm	2050lm	SMR1G2-9402018N-WC
						40°	2800lm	2300lm	SMR1G2-9404018N-WC
						50°	2800lm	2000lm	SMR1G2-9405018N-WC
25W	28W	35V	700mA	90	2700K	20°	3700lm	2450lm	SMR1G2-9272025N-WC
						40°	3700lm	2700lm	SMR1G2-9274025N-WC
						50°	3700lm	2300lm	SMR1G2-9275025N-WC
					3000K	20°	3800lm	2600lm	SMR1G2-9302025N-WC
						40°	3800lm	2900lm	SMR1G2-9304025N-WC
						50°	3800lm	2500lm	SMR1G2-9305025N-WC
					4000K	20°	3900lm	2800lm	SMR1G2-9402025N-WC
						40°	3900lm	3100lm	SMR1G2-9404025N-WC
						50°	3900lm	2700lm	SMR1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SMR1G2-9405025N-WM with Honeycomb SMR1G2-9405025N-WM-H

Honeycomb


Product Code

SMR1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMR1G2 SENSE 125 Trim Version	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMR4G2 SENSE 125 Trimless Version	**930** CRI90/ 3000K	**40** 40°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMR1G2 SENSE 125 El-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125S1-G2 – Modular Design Architectural Downlight System



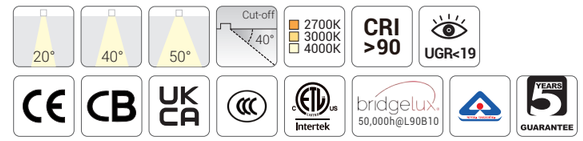


Quick Info

- Ceiling Cut-out: 122x122mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 40°, 50°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

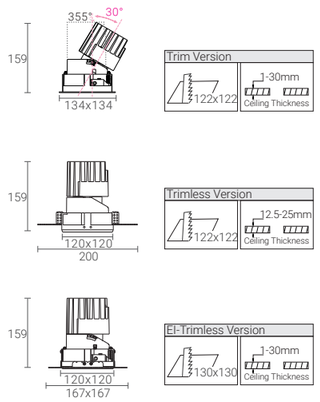

Light Distribution

3000K

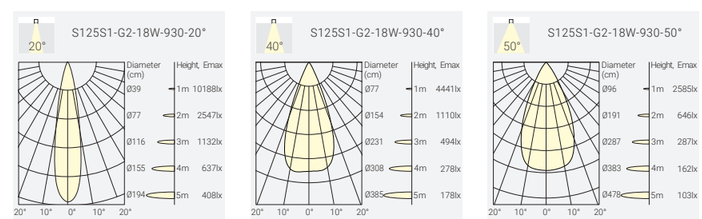

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	34V	500mA	90	2700K	20°	2600lm	1800lm	SMS1G2-9272018N-WC
						40°	2600lm	2000lm	SMS1G2-9274018N-WC
						50°	2600lm	1700lm	SMS1G2-9275018N-WC
					3000K	20°	2700lm	1900lm	SMS1G2-9302018N-WC
						40°	2700lm	2100lm	SMS1G2-9304018N-WC
						50°	2700lm	1850lm	SMS1G2-9305018N-WC
					4000K	20°	2800lm	2050lm	SMS1G2-9402018N-WC
						40°	2800lm	2300lm	SMS1G2-9404018N-WC
						50°	2800lm	2000lm	SMS1G2-9405018N-WC
25W	28W	35V	700mA	90	2700K	20°	3700lm	2450lm	SMS1G2-9272025N-WC
						40°	3700lm	2700lm	SMS1G2-9274025N-WC
						50°	3700lm	2300lm	SMS1G2-9275025N-WC
					3000K	20°	3800lm	2600lm	SMS1G2-9302025N-WC
						40°	3800lm	2900lm	SMS1G2-9304025N-WC
						50°	3800lm	2500lm	SMS1G2-9305025N-WC
					4000K	20°	3900lm	2800lm	SMS1G2-9402025N-WC
						40°	3900lm	3100lm	SMS1G2-9404025N-WC
						50°	3900lm	2700lm	SMS1G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SMS1G2-9405025N-WM with Honeycomb SMS1G2-9405025N-WM-H

Honeycomb


Product Code

SMS1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMS1G2 SENSE 125 Trim Version	**927** CRI90/ 2700K	**20** 20°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMS4G2 SENSE 125 Trimless Version	**930** CRI90/ 3000K	**40** 40°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMS1G2 SENSE 125 El-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125R2-G2 – Modular Design Architectural Downlight System



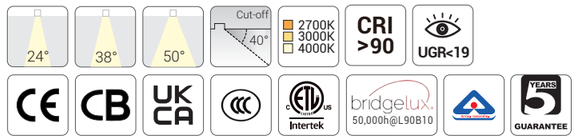


Quick Info

- Ceiling Cut-out: Ø125mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2750lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

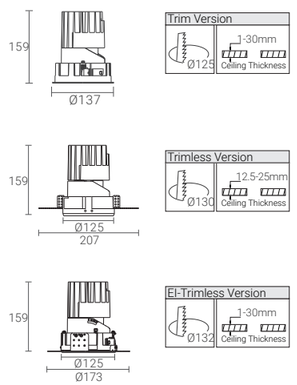

Light Distribution

3000K

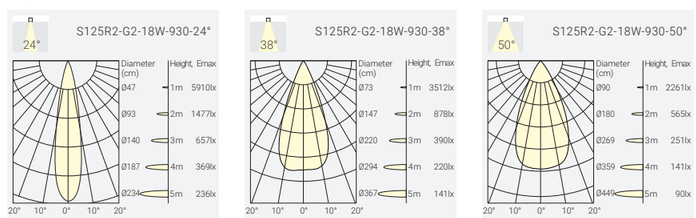

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	34V	500mA	90	2700K	24°	2600lm	1600lm	SMR2G2-9272418N-WC
						38°	2600lm	1800lm	SMR2G2-9273818N-WC
						50°	2600lm	1550lm	SMR2G2-9275018N-WC
					3000K	24°	2700lm	1750lm	SMR2G2-9302418N-WC
						38°	2700lm	1900lm	SMR2G2-9303818N-WC
						50°	2700lm	1700lm	SMR2G2-9305018N-WC
					4000K	24°	2800lm	1850lm	SMR2G2-9402418N-WC
						38°	2800lm	2050lm	SMR2G2-9403818N-WC
						50°	2800lm	1800lm	SMR2G2-9405018N-WC
25W	28W	35V	700mA	90	2700K	24°	3700lm	2200lm	SMR2G2-9272425N-WC
						38°	3700lm	2400lm	SMR2G2-9273825N-WC
						50°	3700lm	2100lm	SMR2G2-9275025N-WC
					3000K	24°	3800lm	2350lm	SMR2G2-9302425N-WC
						38°	3800lm	2550lm	SMR2G2-9303825N-WC
						50°	3800lm	2300lm	SMR2G2-9305025N-WC
					4000K	24°	3900lm	2500lm	SMR2G2-9402425N-WC
						38°	3900lm	2750lm	SMR2G2-9403825N-WC
						50°	3900lm	2450lm	SMR2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SMR2G2-9405025N-WM with Honeycomb
SMR2G2-9405025N-WM-H

Honeycomb


Product Code

SMR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMR2G2 SENSE 125 Trim Version	**927** CRI90/ 2700K	**24** 24°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMR5G2 SENSE 125 Trimless Version	**930** CRI90/ 3000K	**38** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMR2G2 SENSE 125 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S125S2-G2 – Modular Design Architectural Downlight System



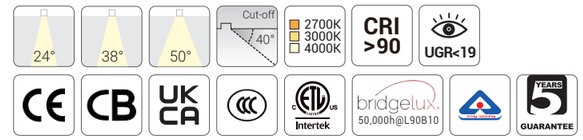


Quick Info

- Ceiling Cut-out: 122x122mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 38°, 50°
- Lumen Output: Up to 2750lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

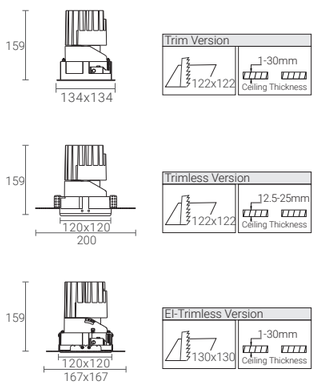

Light Distribution

3000K

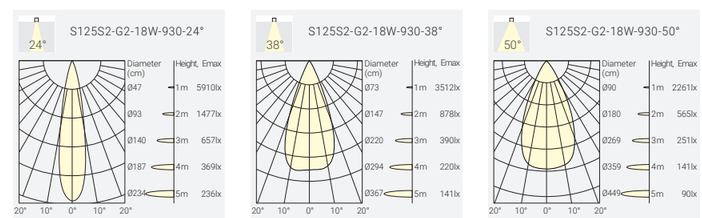

Order Info (SENSE 125-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	21W	34V	500mA	90	2700K	24°	2600lm	1600lm	SMS2G2-9272418N-WC
						38°	2600lm	1800lm	SMS2G2-9273818N-WC
						50°	2600lm	1550lm	SMS2G2-9275018N-WC
					3000K	24°	2700lm	1750lm	SMS2G2-9302418N-WC
						38°	2700lm	1900lm	SMS2G2-9303818N-WC
						50°	2700lm	1700lm	SMS2G2-9305018N-WC
					4000K	24°	2800lm	1850lm	SMS2G2-9402418N-WC
						38°	2800lm	2050lm	SMS2G2-9403818N-WC
						50°	2500lm	1800lm	SMS2G2-9405018N-WC
25W	28W	35V	700mA	90	2700K	24°	3700lm	2200lm	SMS2G2-9272425N-WC
						38°	3700lm	2400lm	SMS2G2-9273825N-WC
						50°	3700lm	2100lm	SMS2G2-9275025N-WC
					3000K	24°	3800lm	2350lm	SMS2G2-9302425N-WC
						38°	3800lm	2550lm	SMS2G2-9303825N-WC
						50°	3800lm	2300lm	SMS2G2-9305025N-WC
					4000K	24°	3900lm	2500lm	SMS2G2-9402425N-WC
						38°	3900lm	2750lm	SMS2G2-9403825N-WC
						50°	3900lm	2450lm	SMS2G2-9405025N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SMS2G2-9405025N-WM with Honeycomb
SMS2G2-9405025N-WM-H

Honeycomb


Product Code

SMS2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SMS2G2 SENSE 125 Trim Version	**927** CRI90/ 2700K	**24** 24°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SMS5G2 SENSE 125 Trimless Version	**930** CRI90/ 3000K	**38** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
EMS2G2 SENSE 125 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150R1-G2 – Modular Design Architectural Downlight System



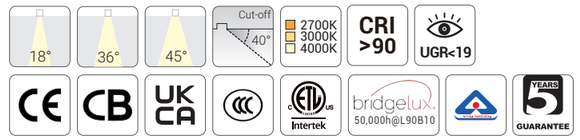


Quick Info

- Ceiling Cut-out: Ø150mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 45°
- Lumen Output: Up to 4700lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: No Driver, On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

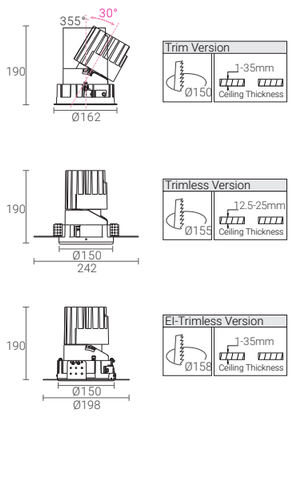

Light Distribution

3000K

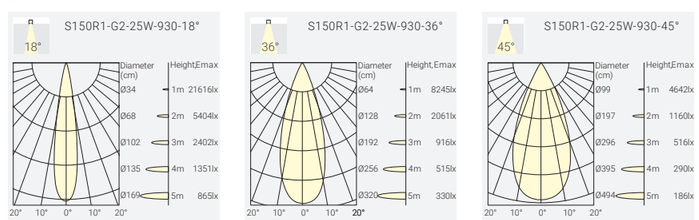

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	18°	3700lm	2800lm	SLR1G2-9271825N-WC
						36°	3700lm	3000lm	SLR1G2-9273625N-WC
						45°	3700lm	3000lm	SLR1G2-9274525N-WC
					3000K	18°	3800lm	2900lm	SLR1G2-9301825N-WC
						36°	3800lm	3100lm	SLR1G2-9303625N-WC
						45°	3800lm	3100lm	SLR1G2-9304525N-WC
					4000K	18°	3900lm	3000lm	SLR1G2-9401825N-WC
						36°	3900lm	3200lm	SLR1G2-9403625N-WC
						45°	3900lm	3200lm	SLR1G2-9404525N-WC
38W	42W	36V	1050mA	90	2700K	18°	5500lm	4100lm	SLR1G2-9271838N-WC
						36°	5500lm	4400lm	SLR1G2-9273638N-WC
						45°	5500lm	4400lm	SLR1G2-9274538N-WC
					3000K	18°	5700lm	4200lm	SLR1G2-9301838N-WC
						36°	5700lm	4500lm	SLR1G2-9303638N-WC
						45°	5700lm	4500lm	SLR1G2-9304538N-WC
					4000K	18°	5900lm	4400lm	SLR1G2-9401838N-WC
						36°	5900lm	4700lm	SLR1G2-9403638N-WC
						45°	5900lm	4700lm	SLR1G2-9404538N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SLR1G2-9404525N-WM with Honeycomb
SLR1G2-9404525N-WM-H

Honeycomb


Product Code

SLR1G2 – * ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLR1G2 SENSE 150 Trim Version	**927** CRI90/ 2700K	**18** 18°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLR4G2 SENSE 150 Trimless Version	**930** CRI90/ 3000K	**36** 36°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
ELR1G2 SENSE 150 EI-Trimless Version	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE S150S1-G2 – Modular Design Architectural Downlight System



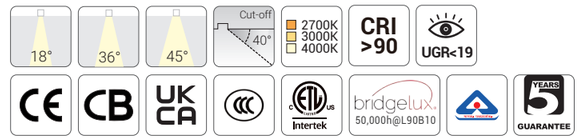


Quick Info

- Ceiling Cut-out: 147x147mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 45°
- Lumen Output: Up to 4700lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

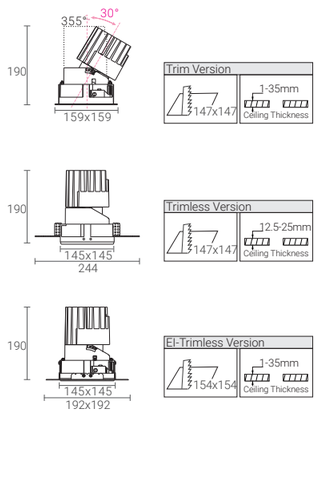

Light Distribution

3000K

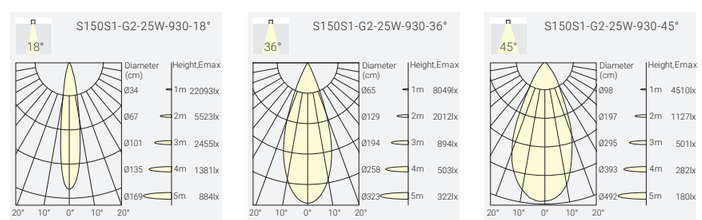

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	18°	3700lm	2800lm	SLS1G2-9271825N-WC
						36°	3700lm	3000lm	SLS1G2-9273625N-WC
						45°	3700lm	3000lm	SLS1G2-9274525N-WC
					3000K	18°	3800lm	2900lm	SLS1G2-9301825N-WC
						36°	3800lm	3100lm	SLS1G2-9303625N-WC
						45°	3800lm	3100lm	SLS1G2-9304525N-WC
					4000K	18°	3900lm	3000lm	SLS1G2-9401825N-WC
						36°	3900lm	3200lm	SLS1G2-9403625N-WC
						45°	3900lm	3200lm	SLS1G2-9404525N-WC
38W	42W	36V	1050mA	90	2700K	18°	5500lm	4100lm	SLS1G2-9271838N-WC
						36°	5500lm	4400lm	SLS1G2-9273638N-WC
						45°	5500lm	4400lm	SLS1G2-9274538N-WC
					3000K	18°	5700lm	4200lm	SLS1G2-9301838N-WC
						36°	5700lm	4500lm	SLS1G2-9303638N-WC
						45°	5700lm	4500lm	SLS1G2-9304538N-WC
					4000K	18°	5900lm	4400lm	SLS1G2-9401838N-WC
						36°	5900lm	4700lm	SLS1G2-9403638N-WC
						45°	5900lm	4700lm	SLS1G2-9404538N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SLS1G2-9404525N-WM with Honeycomb
SLS1G2-940525N-WM-H

Honeycomb

Product Code

SLS1G2 – * ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLS1G2 SENSE 150 Trim Version	**927** CRI90/ 2700K	**18** 18°	**18** 18W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLS4G2 SENSE 150 Trimless Version	**930** CRI90/ 3000K	**36** 38°	**25** 25W	**F** On-Off	**B** Black	**M** Matt	
ELS1G2 SENSE 150 EI-Trimless Version	**940** CRI90/ 4000K	**45** 45°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S150R2-G2 – Modular Design Architectural Downlight System




24° 36° 50° Cut-off 40° 2700K 3000K 4000K CRI >90 UGR<19

CE CB UKCA Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø150mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 4300lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

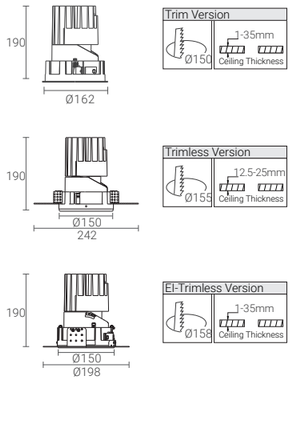

Light Distribution

3000K

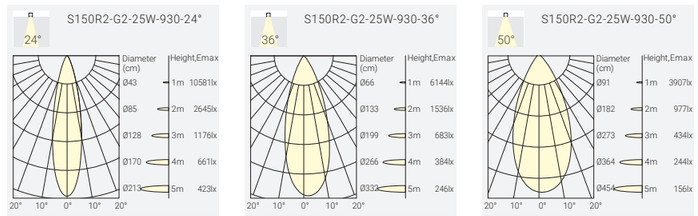

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	24°	3700lm	2500lm	SLR2G2-9272425N-WC
						36°	3700lm	2700lm	SLR2G2-9273625N-WC
						50°	3700lm	2700lm	SLR2G2-9275025N-WC
					3000K	24°	3800lm	2600lm	SLR2G2-9302425N-WC
						36°	3800lm	2800lm	SLR2G2-9303625N-WC
						50°	3800lm	2800lm	SLR2G2-9305025N-WC
					4000K	24°	3900lm	2700lm	SLR2G2-9402425N-WC
						36°	3900lm	2900lm	SLR2G2-9403625N-WC
						50°	3900lm	2900lm	SLR2G2-9405025N-WC
38W	42W	36V	1050mA	90	2700K	24°	5500lm	3700lm	SLR2G2-9272438N-WC
						36°	5500lm	4000lm	SLR2G2-9273638N-WC
						50°	5500lm	3900lm	SLR2G2-9275038N-WC
					3000K	24°	5700lm	3800lm	SLR2G2-9302438N-WC
						36°	5700lm	4100lm	SLR2G2-9303638N-WC
						50°	5700lm	4050lm	SLR2G2-9305038N-WC
					4000K	24°	5900lm	4000lm	SLR2G2-9402438N-WC
						36°	5900lm	4300lm	SLR2G2-9403638N-WC
						50°	5900lm	4200lm	SLR2G2-9405038N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SLR2G2-9405025N-WM with Honeycomb
SLR2G2-9405025N-WM-H

Honeycomb

Product Code

SLR2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLR2G2 SENSE 150 Trim Version	**927** CRI90/ 2700K	**24** 24°	**25** 25W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLR5G2 SENSE 150 Trimless Version	**930** CRI90/ 3000K	**36** 36°	**38** 38W	**F** On-Off	**B** Black	**M** Matt	
ELR2G2 SENSE 150 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	

SENSE S150S2-G2 – Modular Design Architectural Downlight System




24° 36° 50° Cut-off 40° 2700K 3000K 4000K CRI >90 UGR<19

CE CB UKCA Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 147x147mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 25W, 38W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 4300lm System Luminous Flux
- IP Class: IP20 (Light Engine IP54)
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

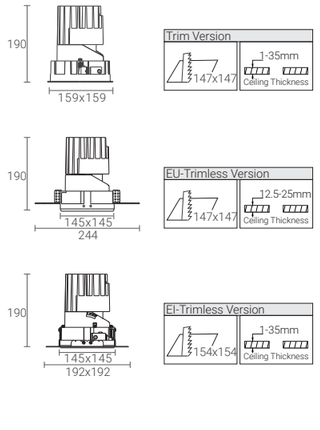

Light Distribution

3000K

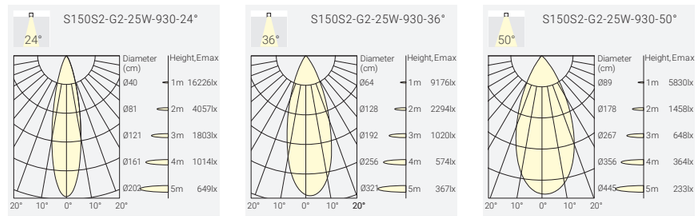

Order Info (SENSE 150-G2 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	24°	3700lm	2400lm	SLS2G2-9272425N-WC
						36°	3700lm	2600lm	SLS2G2-9273625N-WC
						50°	3700lm	2600lm	SLS2G2-9275025N-WC
					3000K	24°	3800lm	2500lm	SLS2G2-9302425N-WC
						36°	3800lm	2700lm	SLS2G2-9303625N-WC
						50°	3800lm	2700lm	SLS2G2-9305025N-WC
					4000K	24°	3900lm	2600lm	SLS2G2-9402425N-WC
						36°	3900lm	2800lm	SLS2G2-9403625N-WC
						50°	3900lm	2800lm	SLS2G2-9405025N-WC
38W	42W	36V	1050mA	90	2700K	24°	5500lm	3700lm	SLS2G2-9272438N-WC
						36°	5500lm	4000lm	SLS2G2-9273638N-WC
						50°	5500lm	3900lm	SLS2G2-9275038N-WC
					3000K	24°	5700lm	3800lm	SLS2G2-9302438N-WC
						36°	5700lm	4100lm	SLS2G2-9303638N-WC
						50°	5700lm	4050lm	SLS2G2-9305038N-WC
					4000K	24°	5900lm	4000lm	SLS2G2-9402438N-WC
						36°	5900lm	4300lm	SLS2G2-9403638N-WC
						50°	5900lm	4200lm	SLS2G2-9405038N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Specular Matt Black Dark Light White Gold

Optional accessory



Code for SLS2G2-9404525N-WM with Honeycomb
SLS2G2-940525N-WM-H

Honeycomb

Product Code

SLS2G2 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
SLS2G2 SENSE 150 Trim Version	**927** CRI90/ 2700K	**24** 24°	**24** 24W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
SLS5G2 SENSE 150 Trimless Version	**930** CRI90/ 3000K	**36** 38°	**38** 38W	**F** On-Off	**B** Black	**M** Matt	
ELS2G2 SENSE 150 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**W** White	
				A 0-10V Dim		**C** Dark Light	
				D DALI Dim		**G** Gold	
						S Specular	


SENSE
New Wall Washer

Consistent illumination from ceiling to floor
Excellent visual comfort with glare-controlled optics
Uniform wall washing with optimized 1:1 spacing ratio




SENSE W75 & W100

The new technology of wall washer downlights is now part of the SENSE 2.0
Ceiling cutouts in both Ø75mm and Ø100mm sizes, offering different power and output options to meet diverse wall washing requirements across varying wall heights.
Excellent glare control and uniform illumination across the wall.
Specular reflector available




SENSE W75

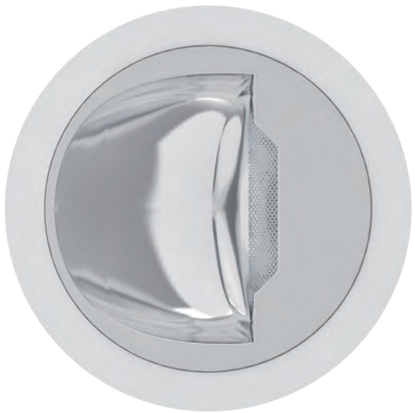

SENSE W100

Wall Washer

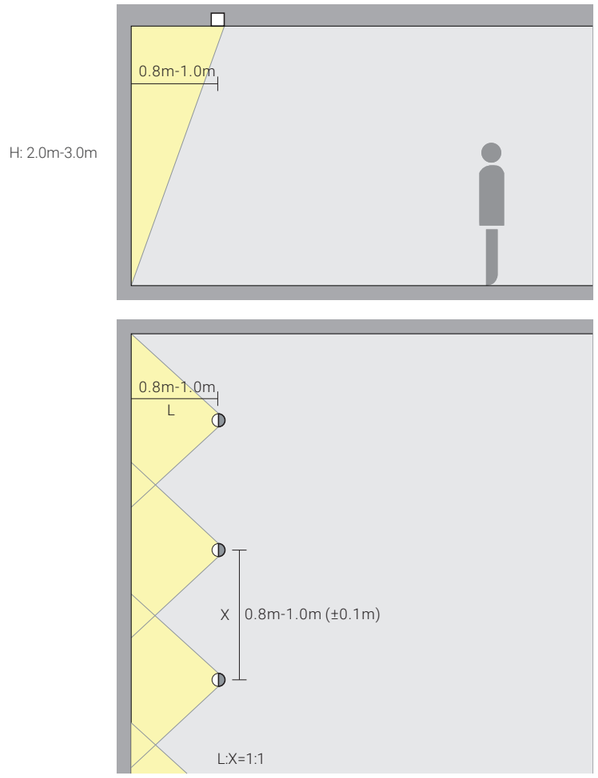




SENSE W75 – The new Technology of Wall Washer Downlights




Wall Washer | 2700K 3000K 4000K | CRI >90 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø75mm
- Bridgelux LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: Wall Washer
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






No Direct Light into Eyes

Light Distribution

3000K



Order Info (SENSE W75 in White Trim & Specular Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	Wall Washer	1400lm	950lm	S3RW-927WW13N-WS
					3000K	Wall Washer	1500lm	1000lm	S3RW-930WW13N-WS
					4000K	Wall Washer	1600lm	1050lm	S3RW-940WW13N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish




White Black

Reflector Options



Specular

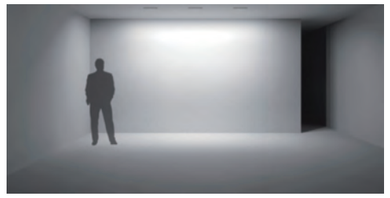

Coding

S3RW – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
S3RW SENSE W75	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	WW Wall Washer	13 13W	N No Driver F On-Off P Phase Dim A 0-10V Dim D DALI Dim	W White B Black	S Specular	


SENSE W100 – The new Technology of Wall Washer Downlights





Wall Washer | 2700K 3000K 4000K | CRI >90 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 17W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: Wall Washer
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim








No Direct Light into Eyes

Light Distribution

3000K



Order Info (SENSE W100 in White Trim & Specular Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	20W	35V	500mA	90	2700K	Wall Washer	2600lm	1550lm	S4RW-927WW17N-WS
					3000K	Wall Washer	2700lm	1600lm	S4RW-930WW17N-WS
					4000K	Wall Washer	2800lm	1650lm	S4RW-940WW17N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish




White Black

Reflector Options



Specular

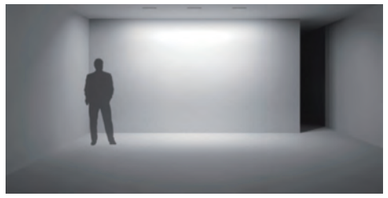


Coding

S4RW – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
S4RW SENSE W100	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	WW Wall Washer	17 17W	N No Driver F On-Off P Phase Dim A 0-10V Dim D DALI Dim	W White B Black	S Specular	

MINUX

IP65 protection from the front
Trim and trimless versions available
DALI and multiple dimming options
Deep-recessed optics for visual comfort (UGR<19)
Ultra-compact downlight with cut-outs from Ø38 mm

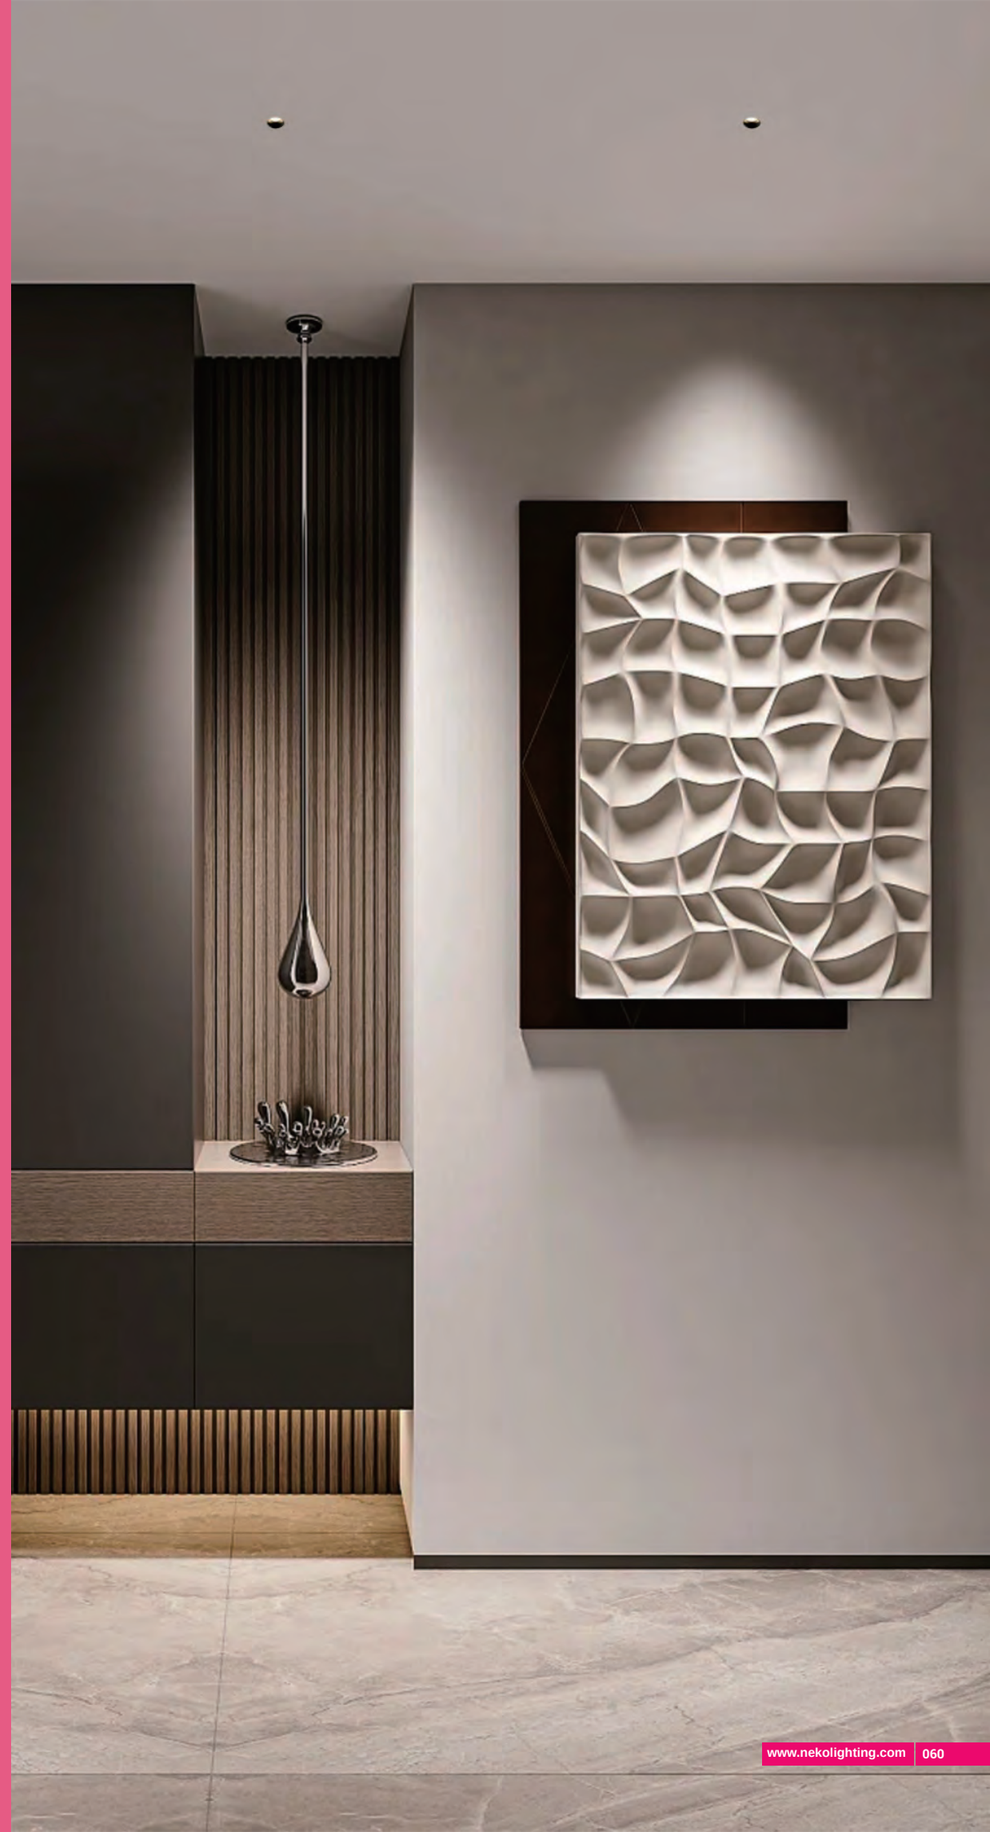


MINUX – The Slim & Powerful Fixed Downlight Series

Minimalist slim design with high lumen package
Ceiling cut-outs in Ø38mm, Ø44mm and Ø57mm for trim version
Trimless versions also available (see details in following pages)
Aluminum housing and in wet-painting finish, excellent dissipation performance & antirust

UGR<19 providing visual comfort and quality light
Beam angles in small, medium and wide for selection
Five different secondary reflectors of dark-light (chrome black), matt, white, black or gold

IP class in IP65 from front, good for damp applications
Color temperature in 2700K, 3000K and 4000K as standard for selection
LED chip in standard CRI>90 and 2-step MacAdam for perfect color consistency

Different functions LED driver in On-Off, Phase Dim, 0-10V Dim and DALI Dim






Scale 1:1
millimeter



MINUX 38 – The Slim & Powerful Fixed Downlight Series





Trim Finish



White Black

Reflector Options



Matt Dark Light Black White Gold

Optional accessory




Code for MIF3-9305006N-WM with Honeycomb
MIF3-9305006N-WM-H

Honeycomb



Soft Ceiling Protection Ring
* for Trim Version ONLY

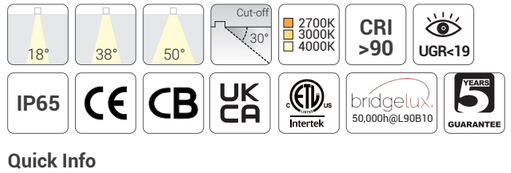


Quick Info

- Ceiling Cut-out: Ø38mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°(UGR<19), 38°(UGR<19), 50°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

Light Distribution

3000K

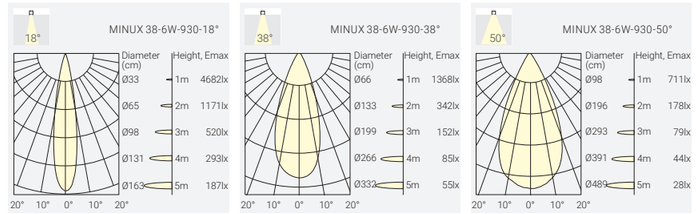

Order Info (MINUX 38 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	34V	200mA	90	2700K	18°	800lm	550lm	MIF3-9271806N-WC
						38°	800lm	550lm	MIF3-9273806N-WC
						50°	800lm	550lm	MIF3-9275006N-WC
					3000K	18°	850lm	600lm	MIF3-9301806N-WC
						38°	850lm	600lm	MIF3-9303806N-WC
						50°	850lm	600lm	MIF3-9305006N-WC
					4000K	18°	900lm	650lm	MIF3-9401806N-WC
						38°	900lm	650lm	MIF3-9403806N-WC
						50°	900lm	650lm	MIF3-9405006N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding


MIF3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF3 MINUX 38 Trim Version	**927** CRI90/ 2700K	**18** 18°	**06** 6W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT3 MINUX 38 Trimless Version	**930** CRI90/ 3000K	**38** 38°		**F** On-Off	**B** Black	**B** Black	
MIE3 MINUX 38 EI-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 0-10V Dim		**W** White	
				D DALI Dim		**G** Gold	




MINUX 44 – The Slim & Powerful Fixed Downlight Series



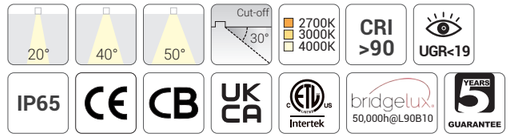


Quick Info

- Ceiling Cut-out: Ø44mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°(UGR<19), 40°(UGR<19), 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

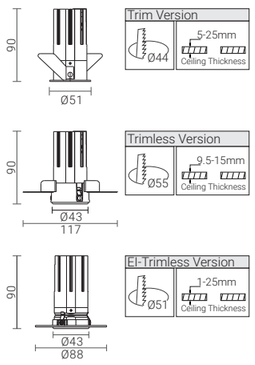

Light Distribution

3000K

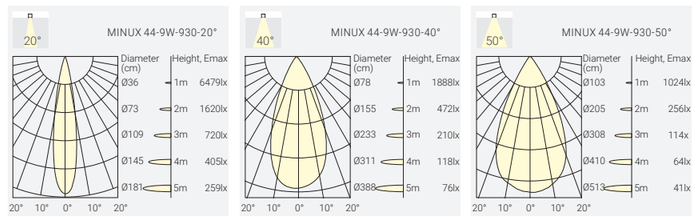

Order Info (MINUX 44 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	20°	1000lm	850lm	MIF4-9272009N-WC
						40°	1000lm	850lm	MIF4-9274009N-WC
						50°	1000lm	850lm	MIF4-9275009N-WC
					3000K	20°	1100lm	900lm	MIF4-9302009N-WC
						40°	1100lm	900lm	MIF4-9304009N-WC
						50°	1100lm	900lm	MIF4-9305009N-WC
					4000K	20°	1200lm	950lm	MIF4-9402009N-WC
						40°	1200lm	950lm	MIF4-9404009N-WC
						50°	1200lm	950lm	MIF4-9405009N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Matt Dark Light Black White Gold

Optional accessory



Code for MIF4-9305009N-WM with Honeycomb
MIF4-9305009N-WM-H

Honeycomb



Soft Ceiling Protection Ring
* for Trim Version ONLY


Coding

MIF4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF4 MINUX 44 Trim Version	**927** CRI90/ 2700K	**20** 20°	**09** 9W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT4 MINUX 44 Trimless Version	**930** CRI90/ 3000K	**40** 40°		**F** On-Off	**B** Black	**B** Black	
MIE4 MINUX 44 El-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 0-10V Dim		**W** White	
				D DALI Dim		**G** Gold	


MINUX 57 – The Slim & Powerful Fixed Downlight Series



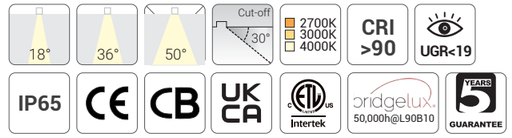


Quick Info

- Ceiling Cut-out: Ø57mm for Trim Version
- Trimless Version also Available
- Bridgelux LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°(UGR<19), 36°(UGR<19), 50°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

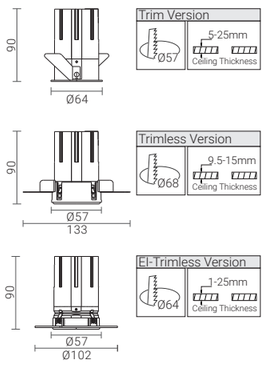

Light Distribution

3000K

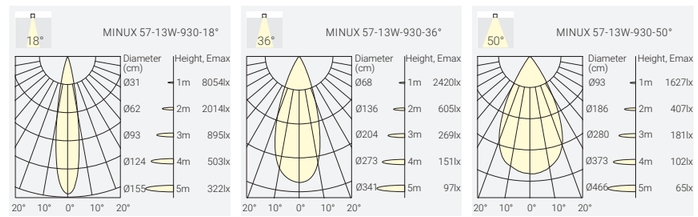

Order Info (MINUX 57 Trim Version in White Trim & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1400lm	1000lm	MIF5-9271813N-WC
						36°	1400lm	1000lm	MIF5-9273613N-WC
						50°	1400lm	1000lm	MIF5-9275013N-WC
					3000K	18°	1500lm	1050lm	MIF5-9301813N-WC
						36°	1500lm	1050lm	MIF5-9303613N-WC
						50°	1500lm	1050lm	MIF5-9305013N-WC
					4000K	18°	1600lm	1100lm	MIF5-9401813N-WC
						36°	1600lm	1100lm	MIF5-9403613N-WC
						50°	1600lm	1100lm	MIF5-9405013N-WC

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trim Finish



White Black

Reflector Options



Matt Dark Light Black White Gold

Optional accessory



Code for MIF5-9305013N-WM with Honeycomb
MIF5-9305013N-WM-H

Honeycomb



Soft Ceiling Protection Ring
* for Trim Version ONLY

Coding

MIF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
MIF5 MINUX 57 Trim Version	**927** CRI90/ 2700K	**18** 18°	**13** 13W	**N** No Driver	**W** White	**C** Dark Light	**H** Honeycomb
MIT5 MINUX 57 Trimless Version	**930** CRI90/ 3000K	**36** 36°		**F** On-Off	**B** Black	**B** Black	
MIE5 MINUX 57 El-Trimless Version	**940** CRI90/ 4000K	**50** 50°		**P** Phase Dim		**M** Matt	
				A 0-10V Dim		**W** White	
				D DALI Dim		**G** Gold	


TAKEO


IP54
UGR<19
High Efficiency
Round & Square
Fixed Downlight Series
The Interchangeable Design



Project: The Mist Hot Spring Hotel, Xuchang, China

TAKEO – High Efficiency Fixed Downlight

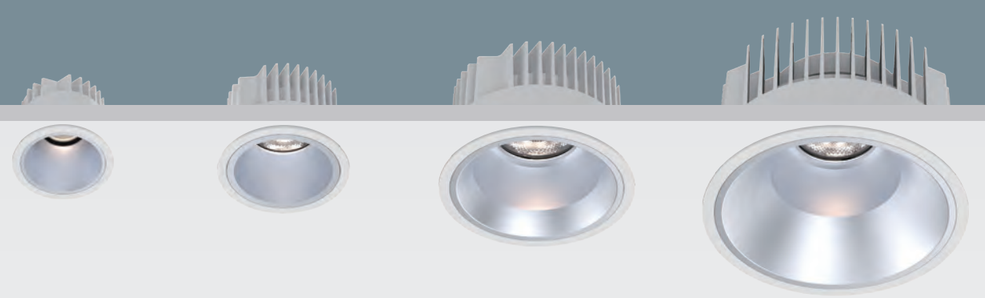




3``

TAKEO T75
7.5W 750lm-870lm
11W 1100lm-1250lm



4``

TAKEO T100 Pro
8.5W 900lm-1200lm
12W 1250lm-1500lm
17W 1700lm-2200lm




6``

TAKEO T150 Pro
17W 1850lm-2350lm
24W 2400lm-3100lm



8``

TAKEO T200 Pro
24W 2300lm-3350lm
36W 3800lm-5000lm

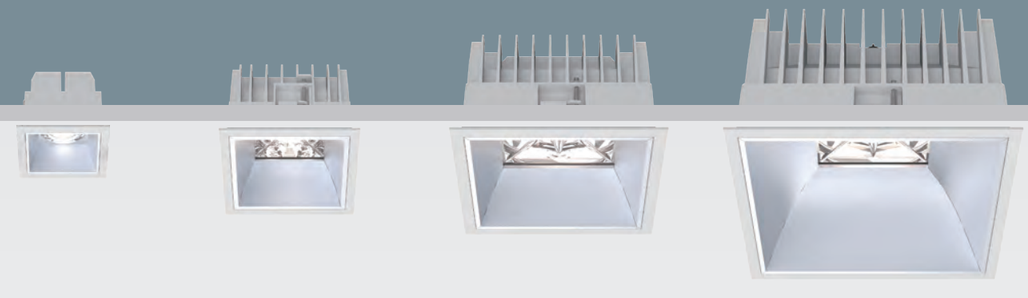




3``

TAKEO TS68
7.5W 770lm-820lm
11W 1150lm-1250lm



4``

TAKEO TS100 Pro
8.5W 900lm-1000lm
12W 1200lm-1300lm



6``

TAKEO TS150 Pro
17W 1700lm-1850lm
24W 2250lm-2400lm



8``

TAKEO TS200 Pro
24W 2300lm-2500lm
36W 3400lm-3650lm



White



Black



White



Black

Project: FIX4 Office, Saasveld, Overijssel, Netherlands



TAKEO T75 – High Efficiency Fixed Downlight




25° 50° Cut-off 40° 2700K 3000K 4000K CRI <90 UGR<19

IP54 CE CB UKCA ETL US Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE PEP eco PASS PORT®


Quick Info

- Ceiling Cut-out: Ø75mm
- Bridgelux LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 25°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

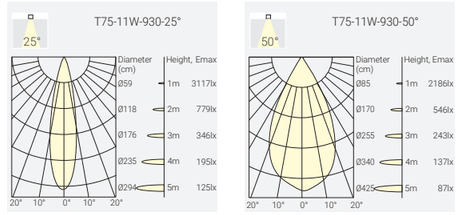

Trim Finish



White Black

Order Info (TAKEO T75 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	34V	200mA	90	2700K	25°	1000lm	750lm	TT1-9272509N-WM
						50°	1000lm	800lm	TT1-9275009N-WM
					3000K	25°	1100lm	770lm	TT1-9302509N-WM
						50°	1100lm	850lm	TT1-9305009N-WM
					4000K	25°	1200lm	800lm	TT1-9402509N-WM
						50°	1200lm	870lm	TT1-9405009N-WM
11W	13W	34V	300mA	90	2700K	25°	1500lm	1100lm	TT2-9272511N-WM
						50°	1500lm	1150lm	TT2-9275011N-WM
					3000K	25°	1600lm	1150lm	TT2-9302511N-WM
						50°	1600lm	1200lm	TT2-9305011N-WM
					4000K	25°	1700lm	1200lm	TT2-9402511N-WM
						50°	1700lm	1250lm	TT2-9405011N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TT1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TT1 T75-7.5W	**927** CRI>90/ 2700K	**25** 25°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	
TT2 T75-11W	**930** CRI>90/ 3000K	**50** 50°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			

TAKEO T100 Pro – High Efficiency Fixed Downlight




30° 50° Cut-off 35° 2700K 3000K 4000K CRI <90 UGR<19

IP54 CE CB UKCA ETL US Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE PEP eco PASS PORT®


Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 8.5W, 12W, 17W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 30°, 50°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

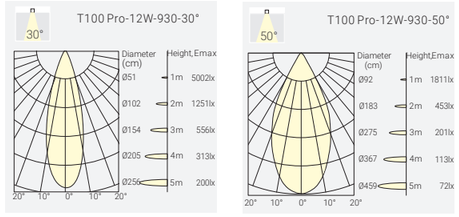

Trim Finish



White Black

Order Info (TAKEO T100 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	90	2700K	30°	1200lm	1100lm	TS4-9272009N-WM
						50°	1200lm	900lm	TS4-9274009N-WM
					3000K	30°	1300lm	1150lm	TS4-9302009N-WM
						50°	1300lm	950lm	TS4-9305009N-WM
					4000K	30°	1400lm	1200lm	TS4-9402009N-WM
						50°	1400lm	1000lm	TS4-9404009N-WM
12W	14W	34V	350mA	90	2700K	30°	1700lm	1400lm	TS4-9272012N-WM
						50°	1700lm	1250lm	TS4-9274012N-WM
					3000K	30°	1800lm	1450lm	TS4-9302012N-WM
						50°	1800lm	1300lm	TS4-9304012N-WM
					4000K	30°	1900lm	1500lm	TS4-9402012N-WM
						50°	1900lm	1350lm	TS4-9404012N-WM
17W	20W	35V	500mA	90	2700K	30°	2400lm	2000lm	TS4-9272017N-WM
						50°	2400lm	1700lm	TS4-9274017N-WM
					3000K	30°	2500lm	2100lm	TS4-9302017N-WM
						50°	2500lm	1800lm	TS4-9304017N-WM
					4000K	30°	2600lm	2200lm	TS4-9402017N-WM
						50°	2600lm	1850lm	TS4-9404017N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TS4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TS4 TAKEO T100 Pro	**927** CRI>90/ 2700K	**30** 30°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**50** 50°	**12** 12W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K		**17** 17W	**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			


TAKEO T100-DW – High Efficiency Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 50°
- Lumen Output: Up to Max.1000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: Phase Dim, 0-10V Dim, DALI Dim , Casambi Wireless Dim



Light Distribution

3000K



Trim Finish



White Black

Reflector Options



White Matt Black

Order Info (TAKEO T100-DW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
12W	14W	34V	350mA	95	1800K-3000K	50°	Max.1000lm	TS2-9D35012N-WM

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)



Coding

TS2	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**		**Trim Finish**	**Reflector Color**		**Accessory**
TS2 TAKEO T100-DW		9D3 CRI>95 1800K-3000K	50 50°	12 12W	N No Driver P Phase Dim A 0-10V Dim D DALI Dim		W White B Black	B Black M Matt W White		


TAKEO T100-TW – High Efficiency Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø100mm
- Bridgelux LED: 13W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 50°
- Lumen Output: Up to Max.1050lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim



Light Distribution

3000K

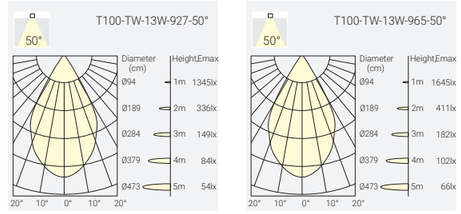

Trim Finish



White Black

Reflector Options



White Matt Black

Order Info (TAKEO T100-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
13W	15W	36V	350mA	90	2700K-6500K	50°	Max.1050lm	TS2-9TW5013N-WM
					@2700K	50°	850lm	
					@3000K	50°	900lm	
					@4000K	50°	950lm	
					@5000K	50°	1000lm	
					@6500K	50°	1050lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Coding

TS2	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**LED Power**	**Control**		**Trim Finish**	**Reflector Color**		**Accessory**
TS2 TAKEO T100-TW		9TW CRI>90 2700K-6500K	50 50°	13 13W	N No Driver D DALI DT8 Dim		W White B Black	B Black M Matt W White		


TAKEO T150 Pro – High Efficiency Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø150mm
- Bridgelux LED: 17W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 30°, 65°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

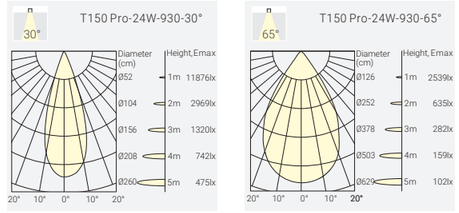

Trim Finish



White Black

Order Info (TAKEO T150 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	34V	500mA	90	2700K	30°	2600lm	2200lm	TM4-9273017N-WM
						65°	2600lm	1850lm	TM4-9276517N-WM
					3000K	30°	2700lm	2300lm	TM4-9303017N-WM
						65°	2700lm	1900lm	TM4-9306517N-WM
					4000K	30°	2800lm	2350lm	TM4-9403017N-WM
						65°	2800lm	2000lm	TM4-9406517N-WM
24W	26W	35V	700mA	90	2700K	30°	3700lm	2900lm	TM4-9273024N-WM
						65°	3700lm	2400lm	TM4-9276524N-WM
					3000K	30°	3800lm	3000lm	TM4-9303024N-WM
						65°	3800lm	2500lm	TM4-9306524N-WM
					4000K	30°	3900lm	3100lm	TM4-9403024N-WM
						65°	3900lm	2600lm	TM4-9406524N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TM4	–	***	**	**	*	–	*	*	–	*
MODEL		CRI/ CCT	Beam Angle	LED Power	Control		Trim Finish	Reflector Color		Accessory
TM4 TAKEO T150 Pro		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	30 30° 65 65°	17 17W 24 24W	N No Driver F On-Off P Phase Dim A 0-10V Dim D DALI Dim		W White B Black	B Black M Matt W White		


TAKEO T150-TW – High Efficiency Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø150mm
- Bridgelux LED: 18W, 25W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 60°
- Lumen Output: Up to Max.2100lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim



Light Distribution

3000K

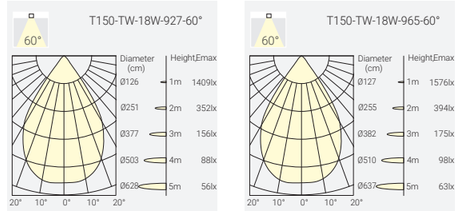

Trim Finish



White Black

Order Info (TAKEO T150-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
18W	21W	36V	500mA	90	2700K-6500K	60°	Max.1500lm	TM1-9TW6018N-WM
					@2700K	60°	1300lm	
					@3000K	60°	1350lm	
					@4000K	60°	1400lm	
					@5000K	60°	1450lm	
					@6500K	60°	1500lm	
25W	28W	36V	700mA	90	2700K-6500K	60°	Max.2100lm	TM2-9TW6025N-WM
					@2700K	60°	1900lm	
					@3000K	60°	1950lm	
					@4000K	60°	2000lm	
					@5000K	60°	2050lm	
					@6500K	60°	2100lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Reflector Options



White Matt Black

Coding

TM1	_	***	**	**	*	_	*	*	_	*
Model		CRI/ CCT	Beam Angle	LED Power	Control		Trim Finish	Reflector Color		Accessory
TM1 TAKEO T150-18W TM2 TAKEO T150-25W		9TW CRI>90 2700K-6500K	60 60°	18 18W 25 25W	D DALI DT8 Dim		W White B Black	B Black M Matt W White		

TAKEO T200 Pro – High Efficiency Fixed Downlight




18° 30° 65° Cut-off 35° 2700K 3000K 4000K CRI <90 UGR<19

IP54 CE CB UKCA ETL US Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE PEP eco PASS PORT


Quick Info

- Ceiling Cut-out: Ø200mm
- Bridgelux LED: 24W, 36W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 30°, 65°
- Lumen Output: Up to 5000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

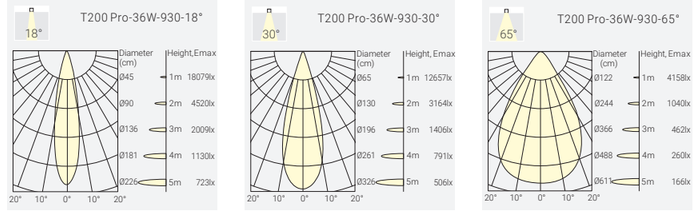

Trim Finish



White Black

Order Info (TAKEO T200 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	35V	700mA	90	2700K	18°	3700lm	3100lm	TL4-9271824N-WM
						30°	3700lm	3150lm	TL4-9273024N-WM
						65°	3700lm	2300lm	TL4-9276524N-WM
					3000K	18°	3800lm	3200lm	TL4-9301824N-WM
						30°	3800lm	3250lm	TL4-9303024N-WM
						65°	3800lm	2400lm	TL4-9306524N-WM
					4000K	18°	3900lm	3300lm	TL4-9401824N-WM
						30°	3900lm	3350lm	TL4-9403024N-WM
						65°	3900lm	2450lm	TL4-9406524N-WM
36W	40W	35V	1050mA	90	2700K	18°	5500lm	4700lm	TL4-9271836N-WM
						30°	5500lm	4500lm	TL4-9273036N-WM
						65°	5500lm	3800lm	TL4-9276536N-WM
					3000K	18°	5700lm	4900lm	TL4-9301836N-WM
						30°	5700lm	4700lm	TL4-9303036N-WM
						65°	5700lm	3950lm	TL4-9306536N-WM
					4000K	18°	5900lm	5000lm	TL4-9401836N-WM
						30°	5900lm	4800lm	TL4-9403036N-WM
						65°	5900lm	4050lm	TL4-9406536N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TL4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TL4 TAKEO T200 Pro	927 CRI>90/ 2700K	18 18°	24 24W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	30 30°	36 36W	F On-Off	B Black	M Matt	
	940 CRI>90/ 4000K	65 65°		P Phase Dim		W White	
				A 0-10V Dim			
				D DALI Dim			

TAKEO T200-TW – High Efficiency Fixed Downlight




60° Cut-off 35° 2700K 6500K Tunable White CRI <90 UGR<19

IP54 CE CB UKCA ETL US Intertek bridgelux 80,000h@L80B10 5 YEARS GUARANTEE PEP eco PASS PORT


Quick Info

- Ceiling Cut-out: Ø200mm
- Bridgelux LED: 25W, CRI>90
- CCT: Tunable White 2700K-6500K
- Beam Angle: 60°
- Lumen Output: Up to Max.2000lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: DALI DT8 Dim



Light Distribution

3000K

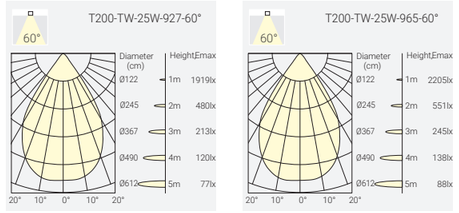

Trim Finish



White Black

Reflector Options



White Matt Black

Order Info (TAKEO T200-TW in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
25W	28W	36V	700mA	90	2700K-6500K	60°	Max.2000lm	TL1-9TW6025N-WM
					@2700K	60°	1800lm	
					@3000K	60°	1850lm	
					@4000K	60°	1900lm	
					@5000K	60°	1950lm	
					@6500K	60°	2000lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

Coding


TL1 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TL1 TAKEO T200 TW	9TW CRI>90 2700K-6500K	60 60°	25 25W	N No Driver	W White	B Black	
				D DALI DT8 Dim	B Black	M Matt	
						W White	

TAKEO T150C Pro – High Efficiency Fixed Downlight





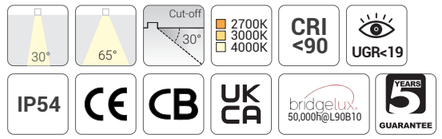



Quick Info

- Bridgelux LED: 17W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 30° , 65°
- Lumen Output: Up to 3100lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

Light Distribution

3000K





Housing Finish



White Black

Order Info (TAKEO T150C Pro in White Housing & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	34V	500mA	90	2700K	30°	2600lm	2200lm	TMC4-9273017N-WM
						65°	2600lm	1850lm	TMC4-9276517N-WM
					3000K	30°	2700lm	2300lm	TMC4-9303017N-WM
						65°	2700lm	1900lm	TMC4-9306517N-WM
					4000K	30°	2800lm	2350lm	TMC4-9403017N-WM
						65°	2800lm	2000lm	TMC4-9406517N-WM
24W	26W	35V	700mA	90	2700K	30°	3700lm	2900lm	TMC4-9273024N-WM
						65°	3700lm	2400lm	TMC4-9276524N-WM
					3000K	30°	3800lm	3000lm	TMC4-9303024N-WM
						65°	3800lm	2500lm	TMC4-9306524N-WM
					4000K	30°	3900lm	3100lm	TMC4-9403024N-WM
						65°	3900lm	2600lm	TMC4-9406524N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options




White Matt Black

Coding

TMC4 – *** ** ** * – * * – *

MODEL	CRI/ CCT	Beam Angle	LED Power	Control	Housing Finish	Reflector Color	Accessory
TMC4 TAKEO T150C Pro	927 CRI>90/ 2700K	30 30°	17 17W	N No Driver	W White	B Black	
	930 CRI>90/ 3000K	65 65°	24 24W	F On-Off	B Black	M Matt	
	940 CRI>90/ 4000K			P Phase Dim		W White	
				A 0-10V Dim			
				D DALI Dim			

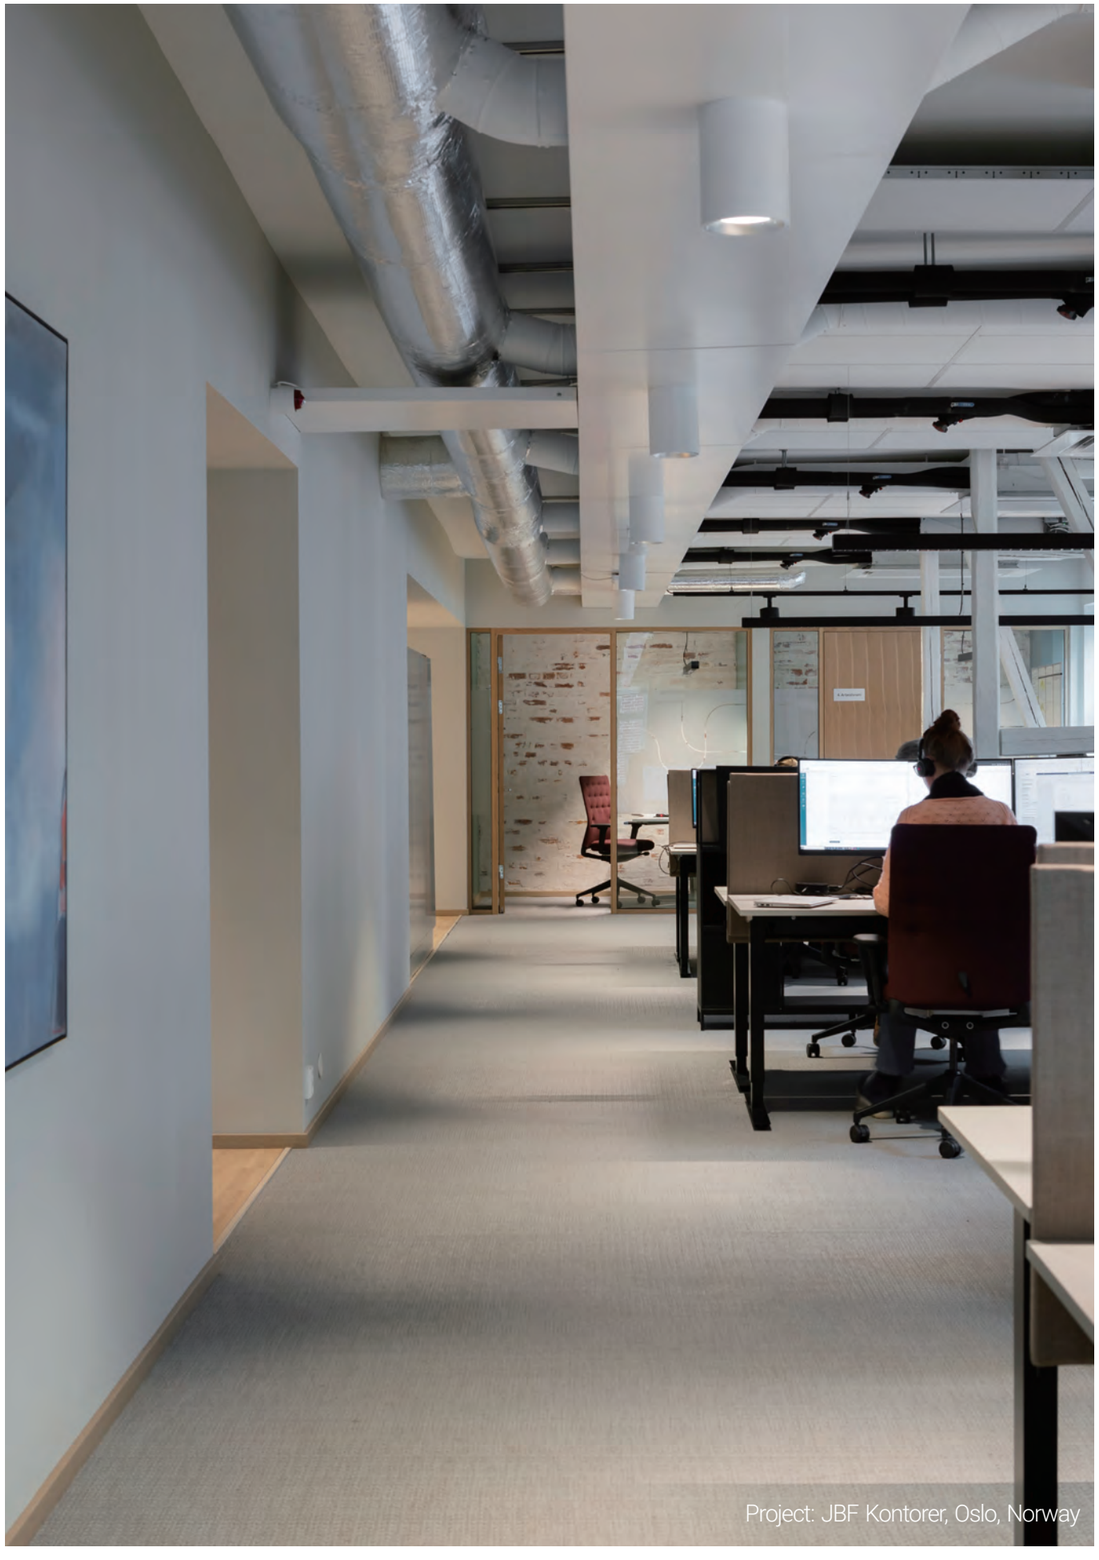

Project: JBF Kontorer, Oslo, Norway

TAKEO TS68 – High Efficiency Fixed Downlight




25° 60° Cut-off 40° 2700K 3000K 4000K CRI <90 UGR<19

IP54 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: 68x68mm
- Bridgelux LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 25°, 60°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Trim Finish



White Black

Order Info (TAKEO TS68 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	9W	34V	200mA	90	2700K	25°	1000lm	770lm	TTS1-9272508N-WM
						60°	1000lm	770lm	TTS1-9276008N-WM
					3000K	25°	1100lm	800lm	TTS1-9302508N-WM
						60°	1100lm	800lm	TTS1-9306008N-WM
					4000K	25°	1200lm	820lm	TTS1-9402508N-WM
						60°	1200lm	820lm	TTS1-9406008N-WM
11W	13W	34V	300mA	90	2700K	25°	1500lm	1150lm	TTS2-9272511N-WM
						60°	1500lm	1150lm	TTS2-9276011N-WM
					3000K	25°	1600lm	1200lm	TTS2-9302511N-WM
						60°	1600lm	1200lm	TTS2-9306011N-WM
					4000K	25°	1700lm	1250lm	TTS2-9402511N-WM
						60°	1700lm	1250lm	TTS2-9406011N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TTS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TTS1 TAKEO TS68-7.5W	**927** CRI>90/ 2700K	**25** 25°	**08** 7.5W	**N** No Driver	**W** White	**B** Black	
TTS2 TAKEO TS68-11W	**930** CRI>90/ 3000K	**60** 60°	**11** 11W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			

TAKEO TS100 Pro – High Efficiency Fixed Downlight




60° Cut-off 35° 2700K 3000K 4000K CRI <90 UGR<19

IP54 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE PEP eco PASS PORT

Quick Info


- Ceiling Cut-out: 100x100mm
- Bridgelux LED: 8.5W, 12W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 60°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K



Trim Finish



White Black

Reflector Options



White Matt Black

Order Info (TAKEO TS100 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	90	2700K	60°	1200lm	900lm	TSS4-9276009N-WM
					3000K	60°	1300lm	950lm	TSS4-9306009N-WM
					4000K	60°	1400lm	1000lm	TSS4-9406009N-WM
12W	14W	34V	350mA	90	2700K	60°	1700lm	1200lm	TSS4-9276012N-WM
					3000K	60°	1800lm	1250lm	TSS4-9306012N-WM
					4000K	60°	1900lm	1300lm	TSS4-9406012N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

TSS4 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSS4 TAKEO TS100 Pro	**927** CRI>90/ 2700K	**60** 60°	**09** 8.5W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K		**12** 12W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			


TAKEO TS150 Pro – High Efficiency Fixed Downlight



70° | Cut-off 30° | 2700K 3000K 4000K | CRI <90 | UGR<19 | IP54 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT


Quick Info

- Ceiling Cut-out: 150x150mm
- Bridgelux LED: 17W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 70°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Trim Finish



White Black

Order Info (TAKEO TS150 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	34V	500mA	90	2700K	70°	2600lm	1700lm	TSM4-9277017N-WM
					3000K	70°	2700lm	1800lm	TSM4-9307017N-WM
					4000K	70°	2800lm	1850lm	TSM4-9407017N-WM
24W	26W	35V	700mA	90	2700K	70°	3700lm	2250lm	TSM4-9277024N-WM
					3000K	70°	3800lm	2350lm	TSM4-9307024N-WM
					4000K	70°	3900lm	2400lm	TSM4-9407024N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TSM4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSM4 TAKEO TS150 Pro	**927** CRI>90/ 2700K	**70** 70°	**17** 17W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K		**24** 24W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			


TAKEO TS200 Pro – High Efficiency Fixed Downlight



70° | Cut-off 35° | 2700K 3000K 4000K | CRI <90 | UGR<19 | IP54 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE | PEP eco PASS PORT


Quick Info

- Ceiling Cut-out: 200x200mm
- Bridgelux LED: 24W, 36W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 70°
- Lumen Output: Up to 3650lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Trim Finish



White Black

Order Info (TAKEO TS200 Pro in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	35V	700mA	90	2700K	70°	3700lm	2300lm	TSL4-9277024N-WM
					3000K	70°	3800lm	2400lm	TSL4-9307024N-WM
					4000K	70°	3900lm	2500lm	TSL4-9407024N-WM
36W	40W	35V	1050mA	90	2700K	70°	5500lm	3400lm	TSL4-9277036N-WM
					3000K	70°	5700lm	3550lm	TSL4-9307036N-WM
					4000K	70°	5900lm	3650lm	TSL4-9407036N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



White Matt Black

Coding

TSL4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
TSL4 TAKEO TS200 Pro	**927** CRI>90/ 2700K	**70** 70°	**24** 24W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K		**36** 36W	**F** On-Off	**B** Black	**M** Matt	
	940 CRI>90/ 4000K			**P** Phase Dim		**W** White	
				A 0-10V Dim			
				D DALI Dim			


PASSION


IP54 rated, available in four finishes
Uniform illumination with 60° beam angle
Up to 140 lm/W with excellent visual comfort
Single CCT or switchable CCT versions available
Deep-recessed optics for glare control (UGR<19)



PASSION 100 – The High Efficiency Fixed Downlight







3000K-3500K-4000K CCT Switchable Version




Quick Info

- Ceiling Cut-out: Ø100mm
- LED: 8W, 12W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 1750lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K



Finish



White-Specular | White-Matt | White-White | Black-Black

Order Info (PASSION 100 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	80	3000K	60°	1500lm	1100lm	PAN4-8306008N-WS
					4000K	60°	1600lm	1200lm	PAN4-8406008N-WS
12W	14W	33V	350mA	80	3000K	60°	2100lm	1650lm	PAN4-8306012N-WS
					4000K	60°	2300lm	1750lm	PAN4-8406012N-WS
8W	10W	33V	250mA	80	3000K-3500K-4000K	60°	1500lm	Max.1150lm	PAN4-8S306008N-WS
13W	15W	33V	350mA	80	3000K-3500K-4000K	60°	2100lm	Max.1600lm	PAN4-8S306013N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

PAN4 – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN4 PASSION 100	**830** CRI>80/ 3000K	**60** 60°	**08** 8W	**N** No Driver	**WS** White-Specular	
	840 CRI>80/ 4000K		**12** 12W	**F** On-Off	**WM** White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			**P** Phase Dim	**WW** White-White	
	930 CRI>90/ 3000K			**A** 0-10V Dim	**BB** Black-Black	
	940 CRI>90/ 4000K			**D** DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					



Project: Application reference


PASSION 150 – The High Efficiency Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø150mm
- LED: 16W, 23W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 3500lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






3000K-3500K-4000K CCT Switchable Version

Light Distribution

3000K



Finish



White-Specular White-Matt White-White Black-Black

Order Info (PASSION 150 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	3000K	60°	3100lm	2450lm	PAN6-8306016N-WS
					4000K	60°	3400lm	2600lm	PAN6-8406016N-WS
23W	25W	33V	700mA	80	3000K	60°	3900lm	3350lm	PAN6-8306023N-WS
					4000K	60°	4200lm	3500lm	PAN6-8406023N-WS
18W	20W	33V	500mA	80	3000K-3500K-4000K	60°	3100lm	Max.2450lm	PAN6-8S306018N-WS
25W	28W	33V	700mA	80	3000K-3500K-4000K	60°	3900lm	Max.3350lm	PAN6-8S306025N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding

PAN6 – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN6 PASSION 150	**830** CRI>80/ 3000K	**60** 60°	**16** 16W	**N** No Driver	**WS** White-Specular	
	840 CRI>80/ 4000K		**23** 23W	**F** On-Off	**WM** White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			**P** Phase Dim	**WW** White-White	
	930 CRI>90/ 3000K			**A** 0-10V Dim	**BB** Black-Black	
	940 CRI>90/ 4000K			**D** DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					


PASSION 200 – The High Efficiency Fixed Downlight




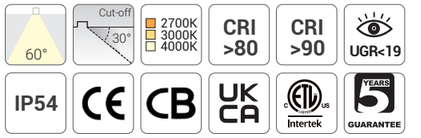

Quick Info

- Ceiling Cut-out: Ø175mm-200mm
- LED: 23W, 30W, CRI>80, CRI>90
- CCT: Single 3000K, 4000K or 3000K-3500K-4000K CCT Switchable
- Beam Angle: 60° within Opal Cover
- Lumen Output: Up to 4600lm System Luminous Flux
- IP Class: IP54 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






3000K-3500K-4000K CCT Switchable Version

Light Distribution

3000K



Finish



White-Specular White-Matt White-White Black-Black

Order Info (PASSION 200 in White-Specular Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
23W	25W	33V	700mA	80	3000K	60°	3900lm	3500lm	PAN8-8306023N-WS
					4000K	60°	4200lm	3650lm	PAN8-8406023N-WS
30W	33W	33V	900mA	80	3000K	60°	5000lm	4350lm	PAN8-8306030N-WS
					4000K	60°	5300lm	4600lm	PAN8-8406030N-WS
25W	28W	33V	700mA	80	3000K-3500K-4000K	60°	3900lm	Max.3550lm	PAN8-8S306025N-WS
30W	33W	33V	900mA	80	3000K-3500K-4000K	60°	5000lm	Max.4350lm	PAN8-8S306030N-WS

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

PAN8 – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish-Reflector Color	Accessory
PAN8 PASSION 200	**830** CRI>80/ 3000K	**60** 60°	**23** 23W	**N** No Driver	**WS** White-Specular	
	840 CRI>80/ 4000K		**30** 30W	**F** On-Off	**WM** White-Matt	
	8S3 CRI>80/ 3000K-3500K-4000K			**P** Phase Dim	**WW** White-White	
	930 CRI>90/ 3000K			**A** 0-10V Dim	**BB** Black-Black	
	940 CRI>90/ 4000K			**D** DALI Dim		
	9S3 CRI>90/ 3000K-3500K-4000K					

CLUB


Power from 6W to 18W
Modular Downlight System
Round & Square, Trim & Trimless
Various Trims for Different Applications



Project: Le Bellune Paris Hotel, France

CLUB – M1, M2, M3 & M4 LED Module

- The NEKO M1, M2, M3 & M4 LED Modules is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 2 MacAdam steps.
- You can use NEKO LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee

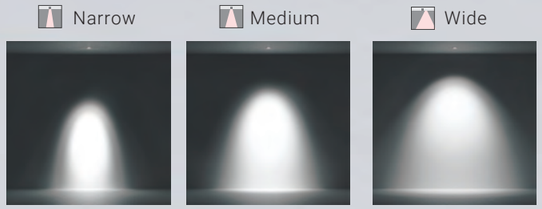

Verschiedene Abstrahlwinkel für architektonische Designs
Three beam angles for various architectural design requirements.



CLUB – M4 Pro Architectural LED Module

- The NEKO M4 Pro LED module is a perfect replacement for MR16 halogen modules.
- Smart and elegant design.
- Versatile for downlight and spotlight applications.
- Uniform color for all LED modules within 2 MacAdam steps.
- You can use NEKO M4 Pro LED modules in various fixture designs with no color variability.
- Outstanding lumen output, excellent lumen maintenance.
- 50,000-hour lifetime eliminates frequent re-lamping.
- NEKO 5-Year Quality Guarantee




Verschiedene Abstrahlwinkel für architektonische Designs
Five beam angles for various architectural design requirements.






CLUB – M1 LED Module



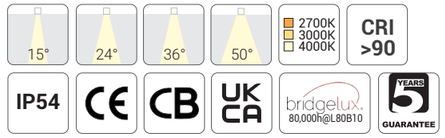


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 6W, 9W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 24°, 36°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

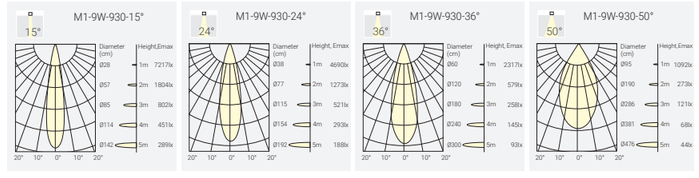


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	15°	950lm	720lm	M1-9271509N-NN
						24°	950lm	800lm	M1-9272409N-NN
						36°	950lm	800lm	M1-9273609N-NN
						50°	950lm	800lm	M1-9275009N-NN
					3000K	15°	1050lm	750lm	M1-9301509N-NN
						24°	1050lm	850lm	M1-9302409N-NN
						36°	1050lm	850lm	M1-9303609N-NN
						50°	1050lm	850lm	M1-9305009N-NN
					4000K	15°	1150lm	800lm	M1-9401509N-NN
						24°	1150lm	950lm	M1-9402409N-NN
						36°	1150lm	950lm	M1-9403609N-NN
						50°	1150lm	950lm	M1-9405009N-NN
6W	8W	36V	180mA	90	2700K	15°	720lm	520lm	M1-9271506N-NN
						24°	720lm	550lm	M1-9272406N-NN
						36°	720lm	550lm	M1-9273606N-NN
						50°	720lm	550lm	M1-9275006N-NN
					3000K	15°	750lm	570lm	M1-9301506N-NN
						24°	750lm	600lm	M1-9302406N-NN
						36°	750lm	600lm	M1-9303606N-NN
						50°	750lm	600lm	M1-9305006N-NN
					4000K	15°	800lm	620lm	M1-9401506N-NN
						24°	800lm	650lm	M1-9402406N-NN
						36°	800lm	650lm	M1-9403606N-NN
						50°	800lm	650lm	M1-9405006N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


CLUB – M2 LED Module



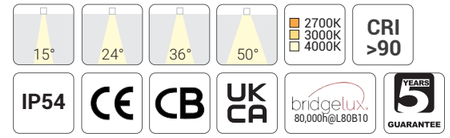


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 24°, 36°, 50°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

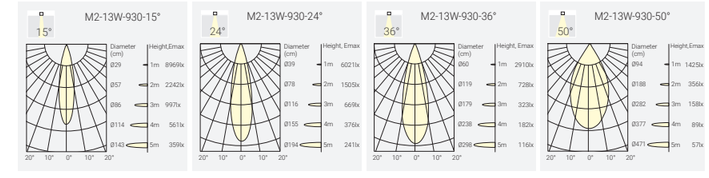

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1300lm	900lm	M2-9271513N-NN
						24°	1300lm	980lm	M2-9272413N-NN
						36°	1300lm	980lm	M2-9273613N-NN
						50°	1300lm	950lm	M2-9275013N-NN
					3000K	15°	1450lm	950lm	M2-9301513N-NN
						24°	1450lm	1150lm	M2-9302413N-NN
						36°	1450lm	1150lm	M2-9303613N-NN
						50°	1450lm	1100lm	M2-9305013N-NN
					4000K	15°	1600lm	1100lm	M2-9401513N-NN
						24°	1600lm	1250lm	M2-9402413N-NN
						36°	1600lm	1250lm	M2-9403613N-NN
						50°	1600lm	1200lm	M2-9405013N-NN
9W	11W	36V	250mA	90	2700K	15°	950lm	720lm	M2-9271509N-NN
						24°	950lm	800lm	M2-9272409N-NN
						36°	950lm	800lm	M2-9273609N-NN
						50°	950lm	780lm	M2-9275009N-NN
					3000K	15°	1050lm	780lm	M2-9301509N-NN
						24°	1050lm	850lm	M2-9302409N-NN
						36°	1050lm	850lm	M2-9303609N-NN
						50°	1050lm	800lm	M2-9305009N-NN
					4000K	15°	1150lm	850lm	M2-9401509N-NN
						24°	1150lm	950lm	M2-9402409N-NN
						36°	1150lm	950lm	M2-9403609N-NN
						50°	1150lm	900lm	M2-9405009N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

CLUB – M3 LED Module




15° 25° 35° 60° 2700K 3000K 4000K CRI >90

IP54 CE CB UKCA ETL Intertek bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 7.5W, 11W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 25°, 35°, 60°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

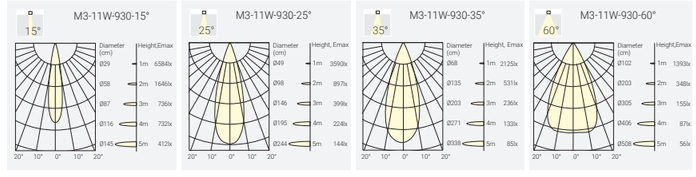

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	34V	300mA	90	2700K	15°	1200lm	1000lm	M3-9271511N-NN
						25°	1200lm	1000lm	M3-9272511N-NN
						35°	1200lm	1050lm	M3-9273511N-NN
						60°	1200lm	1100lm	M3-9276011N-NN
					3000K	15°	1300lm	1050lm	M3-9301511N-NN
						25°	1300lm	1050lm	M3-9302511N-NN
						35°	1300lm	1100lm	M3-9303511N-NN
						60°	1300lm	1150lm	M3-9306011N-NN
					4000K	15°	1400lm	1100lm	M3-9401511N-NN
						25°	1400lm	1100lm	M3-9402511N-NN
						35°	1400lm	1150lm	M3-9403511N-NN
						60°	1400lm	1200lm	M3-9406011N-NN
7.5W	9W	33V	200mA	90	2700K	15°	850lm	750lm	M3-9271508N-NN
						25°	850lm	750lm	M3-9272508N-NN
						35°	850lm	780lm	M3-9273508N-NN
						60°	850lm	800lm	M3-9276008N-NN
					3000K	15°	900lm	780lm	M3-9301508N-NN
						25°	900lm	780lm	M3-9302508N-NN
						35°	900lm	800lm	M3-9303508N-NN
						60°	900lm	840lm	M3-9306008N-NN
					4000K	15°	950lm	800lm	M3-9401508N-NN
						25°	950lm	800lm	M3-9402508N-NN
						35°	950lm	840lm	M3-9403508N-NN
						60°	950lm	870lm	M3-9406008N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

CLUB – M3 LED Module




35° 60° 1800K 3000K Dim to Warm CRI <95

IP54 CE CB UKCA ETL Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 35°, 60°
- Lumen Output: Up to Max.850lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

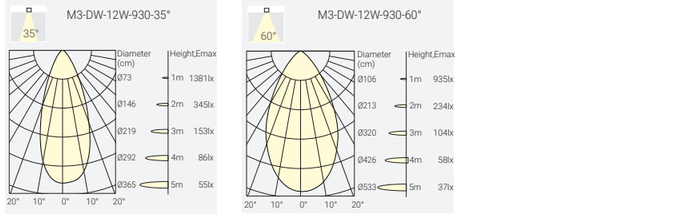

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	95	1800K-3000K	35°	1100lm	Max.850lm	M3-9D33512N-NN
						60°	1100lm	Max.850lm	M3-9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)




CLUB – M4 LED Module






Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 20°, 35°, 60°
- Lumen Output: Up to 1650lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

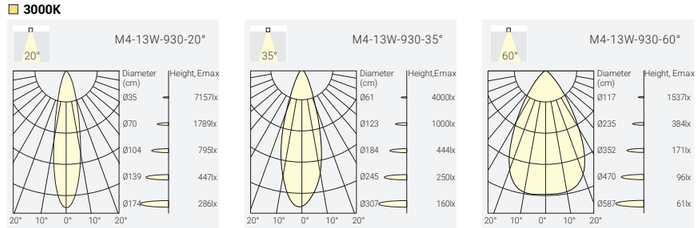

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°	1700lm	1500lm	M4-9272013N-NN
						35°	1700lm	1550lm	M4-9273513N-NN
						60°	1700lm	1550lm	M4-9276013N-NN
					3000K	20°	1800lm	1550lm	M4-9302013N-NN
						35°	1800lm	1600lm	M4-9303513N-NN
						60°	1800lm	1600lm	M4-9306013N-NN
					4000K	20°	1900lm	1600lm	M4-9402013N-NN
						35°	1900lm	1650lm	M4-9403513N-NN
						60°	1900lm	1650lm	M4-9406013N-NN
9W	11W	34V	250mA	90	2700K	20°	1200lm	1100lm	M4-9272009N-NN
						35°	1200lm	1150lm	M4-9273509N-NN
						60°	1200lm	1150lm	M4-9276009N-NN
					3000K	20°	1300lm	1150lm	M4-9302009N-NN
						35°	1300lm	1200lm	M4-9303509N-NN
						60°	1300lm	1200lm	M4-9306009N-NN
					4000K	20°	1400lm	1200lm	M4-9402009N-NN
						35°	1400lm	1250lm	M4-9403509N-NN
						60°	1400lm	1250lm	M4-9406009N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


CLUB – M4 LED Module






Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>95
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 35°, 60°
- Lumen Output: Up to Max.850lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

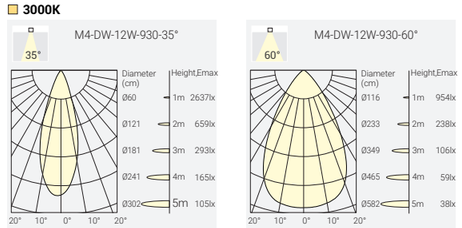

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	95	1800K-3000K	35°	1100lm	Max.850lm	M4-9D33512N-NN
						60°	1100lm	Max.850lm	M4-9D36012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)



CLUB – M4 Pro Architectural LED Module

M4 Pro LED Module
LED Power: 7W/ 9W/ 12W/ 13W/ 18W
LED Chip: Bridgelux CRI>97, R9=95, 2-step SDCM
Beam Angle: 10°/ 15°/ 25°/ 35°/ 50°
Standard CCT: 2700K/ 3000K/ 3500K/ 4000K
Optional CCT: 1800K-3000K Warm Dim/ 2700K-6500K Tunable White
Optional Accessory: Honeycomb/ Diffusion Filter/ Linear Spread Filter
Single Asymmetric Filter/ Double Asymmetric Filter

M4 Pro LED Module



Accessory:




Honeycomb | Diffusion Filter | Linear Spread Filter | Single Asymmetric Filter | Double Asymmetric Filter


CLUB Trim:




Honeycomb Effect



Diffusion Filter Effect

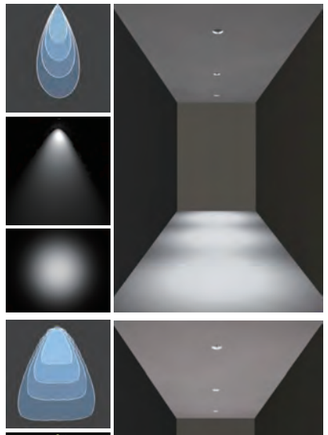

Linear Spread Filter Effect



Single Asymmetric Filter Effect




Double Asymmetric Filter Effect




CLUB – M4 Pro Architectural LED Module



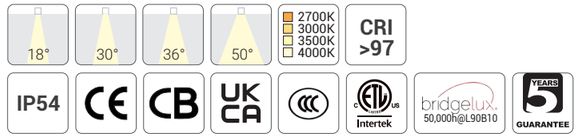


Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 13W, 18W, CRI>97
- CCT: 2700K, 3000K, 3500K, 4000K
- Beam Angle: 15°/18°, 25°/30° , 35°/36°, 50°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K

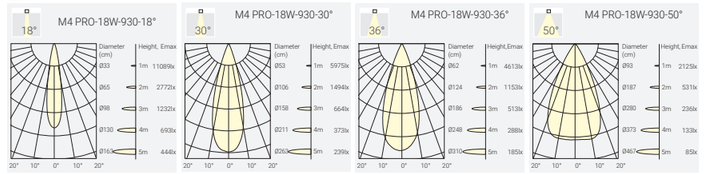

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	97	2700K	15°	1300lm	1050lm	M4P3-0271513N-NN
						25°	1300lm	1050lm	M4P3-0272513N-NN
						35°	1300lm	1050lm	M4P3-0273513N-NN
						50°	1300lm	1000lm	M4P3-0276013N-NN
					3000K	15°	1400lm	1100lm	M4P3-0301513N-NN
						25°	1400lm	1100lm	M4P3-0302513N-NN
						35°	1400lm	1100lm	M4P3-0303513N-NN
						50°	1400lm	1050lm	M4P3-0306013N-NN
					3500K	15°	1450lm	1150lm	M4P3-0351513N-NN
						25°	1450lm	1150lm	M4P3-0352513N-NN
						35°	1450lm	1150lm	M4P3-0353513N-NN
						50°	1450lm	1100lm	M4P3-0356013N-NN
					4000K	15	1500lm	1200lm	M4P3-0401513N-NN
						25°	1500lm	1200lm	M4P3-0402513N-NN
						35°	1500lm	1200lm	M4P3-0403513N-NN
						50°	1500lm	1150lm	M4P3-0406013N-NN
18W	21W	36V	500mA	97	2700K	18°	1900lm	1500lm	M4P4-0271818N-NN
						30°	1900lm	1500lm	M4P4-0273018N-NN
						36°	1900lm	1500lm	M4P4-0273618N-NN
						50°	1900lm	1400lm	M4P4-0275018N-NN
					3000K	18°	2000lm	1600lm	M4P4-0301818N-NN
						30°	2000lm	1600lm	M4P4-0303018N-NN
						36°	2000lm	1600lm	M4P4-0303618N-NN
						50°	2000lm	1500lm	M4P4-0305018N-NN
					3500K	18°	2150lm	1650lm	M4P4-0301818N-NN
						30°	2150lm	1650lm	M4P4-0353018N-NN
						36°	2150lm	1650lm	M4P4-0353618N-NN
						50°	2150lm	1500lm	M4P4-0355018N-NN
					4000K	18°	2200lm	1700lm	M4P4-0401818N-NN
						30°	2200lm	1700lm	M4P4-0403018N-NN
						36°	2200lm	1700lm	M4P4-0403618N-NN
						50°	2200lm	1650lm	M4P4-0405018N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


CLUB – M4 Pro Architectural LED Module






Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 7W, CRI>97
- CCT: 2700K, 3000K, 3500K, 4000K
- Beam Angle: 10°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	36V	200mA	97	2700K	10°	650lm	500lm	M4P1-0271007N-NN
					3000K	10°	700lm	550lm	M4P1-0301007N-NN
					3500K	10°	725lm	570lm	M4P1-0351007N-NN
					4000K	10°	750lm	600lm	M4P1-0401007N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

CLUB – M4 Pro Architectural LED Module







Quick Info

- Fit with CLUB Series Trims
- Bridgelux LED: 12W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°, 50°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K






Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	90	1800K-3000K	38°	1100lm	Max.900lm	M4P5-0D33812N-NN
						50°	1100lm	Max.850lm	M4P5-0D35012N-NN

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)



CLUB – M4 Pro Architectural LED Module

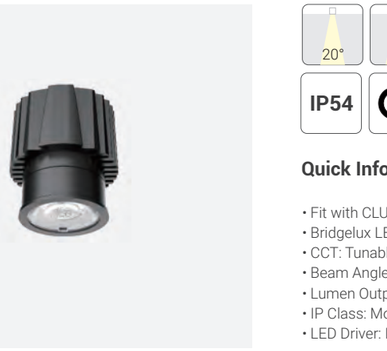





Quick Info


- Fit with CLUB Series Trims
- Bridgelux LED: 9W, 13W, CRI>90,
- CCT: Tunable White 2700K-6500K
- Beam Angle: 20°, 35°, 50°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: DALI DT8 Dim

Light Distribution

3000K








Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
9W	11W	36V	250mA	90	2700K-6500K	20°	700lm-850lm	M4P6-9TW2009N-NN
						38°	700lm-850lm	M4P6-9TW3809N-NN
						50°	700lm-850lm	M4P6-9TW5009N-NN
					@2700K	38°	700lm	
					@3000K	38°	730lm	
					@4000K	38°	800lm	
					@5000K	38°	850lm	
					@6500K	38°	850lm	
13W	15W	36V	350mA	90	2700K-6500K	20°	900lm-1100lm	M4P6-9TW2013N-NN
						38°	900lm-1100lm	M4P6-9TW3813N-NN
						50°	850lm-1050lm	M4P6-9TW5013N-NN
					@2700K	38°	900lm	
					@3000K	38°	950lm	
					@4000K	38°	1000lm	
					@5000K	38°	1100lm	
					@6500K	38°	1100lm	

Code Remark: N=N(No Driver) D=D(DALI DT8 Dim)

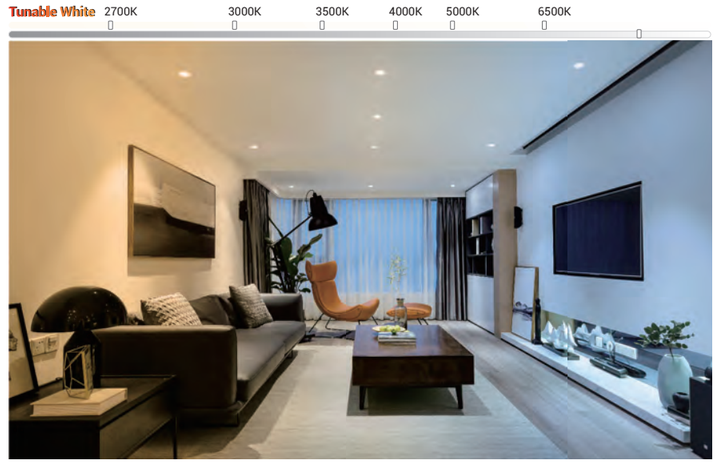

CLUB – Vanity Downlight

New



50° (Asymmetrical) | 3500K 4000K | CRI >97 | IP54 | CE | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- CLUB Vanity Downlight
- Bridgelux LED: 9W, CRI>97
- CCT: 3500K, 4000K
- Beam Angle: 50°(Asymmetrical)
- Lumen Output: Up to 700lm System Luminous Flux
- IP Class: Module IP54
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim

Light Distribution

3500K

Trim Finish



White Black

Reflector Options



Black Dark Light

Optional accessory



Single Asymmetric Filter

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	3500K	50°	1050lm	650lm	CVDR1-0355009N-WC
					4000K	50°	1100lm	700lm	CVDR1-0405009N-WC

Code Remark: N=N(No Driver) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

CVDR1 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
CVDR1 CLUB Vanity	035 CRI97/ 3500K 040 CRI97/ 4000K	50 50° Asymmetrical	09 9W	F On-Off P Phase Dim A 0-10V Dim D DALI Dim	W White B Black	B Black C Dark Light	Single Asymmetric Filter

Vanity Downlight, Targeted Facial Lighting – CRI 97 for True-to-Life Beauty

Traditional Downlight

Facial Shadows


Overhead lighting casts shadows across the face.

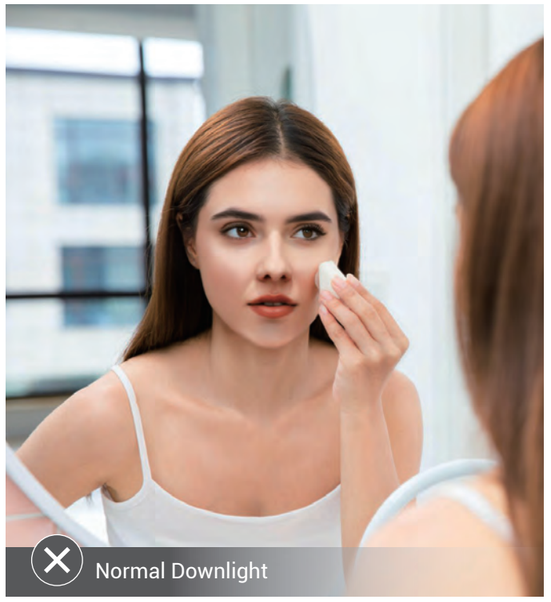



CLUB Vanity Downlight

Clear Facial Lighting

Even illumination highlights facial features.

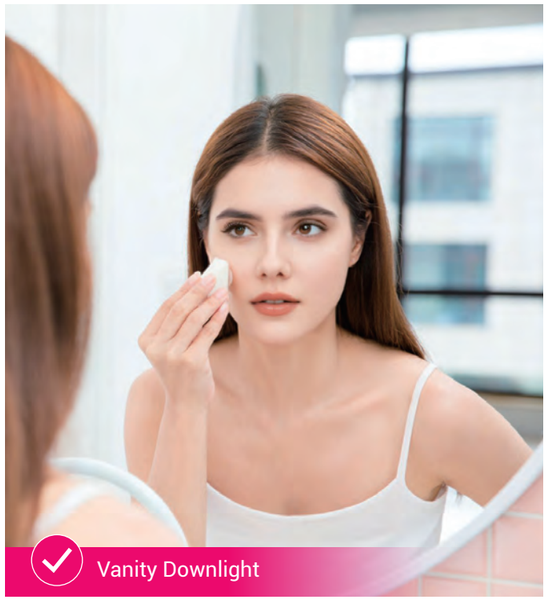

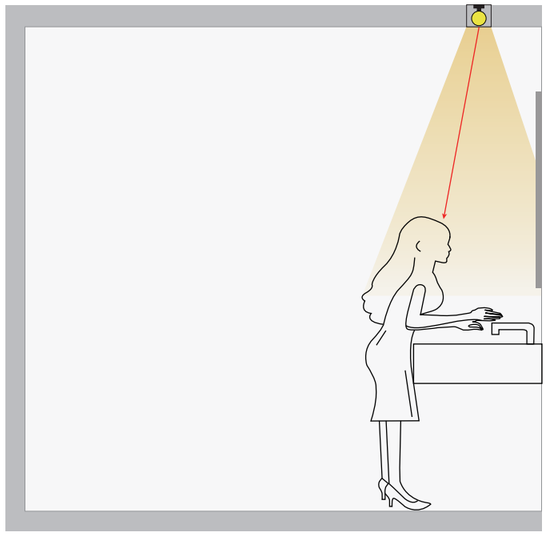

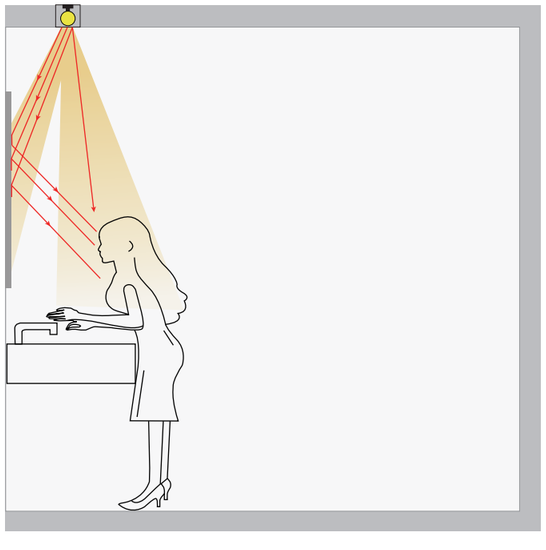

CLUB – Modular Downlight System

- Perfect choice for specified architectural projects
- Compatible with Mr16 and LED Modules
- Wide range of design variants for different applications
- Available in trimless versions
- Decorative rings painted in a variety of colors (black, white, marble, wood, etc.)
- Magnetic design for changing decorative ring without any tools

Module


M1


M2


M3


M4


M4 Pro

Ring







Holding Ring-R


Honeycomb


Linear Spread Filter


Diffusion Filter







Holding Ring-S

Trim


TA Pre-installation Trim


KA-EI Pre-installation Trim


KA Pre-installation Trim


TSA Pre-installation Trim


KSA-EI Pre-installation Trim


KSA Pre-installation Trim

Reflector






Decoration Ring
Decoration Ring Cover


Decoration Ring
Decoration Ring Cover




Decoration Ring
Decoration Ring Cover


TF5


TRF1-IP44


TA5


TA5-IP65


TA6


TA7


TA8


TSF1


TSA1


TSA2


TSA3


KF5-EI


KRF1-EI-IP44


KA5-EI

KA6-EI

KA7-EI

KA8-EI

KSF1-EI

KSA1-EI

KSA2-EI

KSA3-EI

KF5

KRF1-IP44

KA5

KA6

KA7

KA8

KSF1

KSA1

KSA2

KSA3

White
Code: W1 WW

Matt
Code: F5 MR

White
Code: F5 WR

Matt
Code: RF1 MR

White
Code: RF1 WR

Matt
Code: A5 MR

White
Code: A5 WR

Matt
Code: A6 MD

White
Code: A6 WD

Black
Code: A6 BD

Gold
Code: A6 GD

Matt
Code: A7 MD

White
Code: A7 WD

Black
Code: A7 BD

Gold
Code: A7 GD

White-Matt
Code: A8 WM

White-White
Code: A8 WW

Matt
Code: SA1 MR

White
Code: SA1 WR

Matt
Code: SA2 MD

White
Code: SA2 WD

Black
Code: SA2 BD

Gold
Code: SA2 GD

White-Matt
Code: SA3 WM

White-White
Code: SA3 WW

White-Black
Code: SA3 WB

White-Gold
Code: SA3 WG

Black
Code: W1 BB

Gold
Code: F5 GR

Black
Code: F5 BR

Gold
Code: RF1 GR

Dark Light
Code: RF1 CR

Black
Code: A5 BR

Gold
Code: A5 GR

Black
Code: A6 BDC

White
Code: A6 WDC

Wood
Code: A6 WODC

Marble
Code: A6 MBDC

Black
Code: A7 BDC

White
Code: A7 WDC

Wood
Code: A7 WODC

Marble
Code: A7 MBDC

White-Black
Code: A8 WB

White-Gold
Code: A8 WG

Black
Code: SA1 BR

Gold
Code: SA1 GR

Black
Code: SA2 BDC

White
Code: SA2 WDC

Wood
Code: SA2 WODC

Marble
Code: SA2 MBDC

Black-Matt
Code: SA3 BM

Black-Black
Code: SA3 BB

Black-Gold
Code: SA3 BG

Black
Code: RF1 BR

Black-Gold
Code: A8 BG

Black-Matt
Code: A8 BM

Black-Black
Code: A8 BB

Matt
Code: SF1 MS

White
Code: SF1 WS

Gold
Code: SF1 GR

Black
Code: SF1 BS


CLUB – Modular Downlight System

Module




M1 M2 M3 M4 M4 Pro

Ring

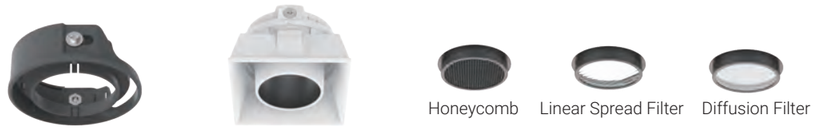

Honeycomb Linear Spread Filter Diffusion Filter

Trim

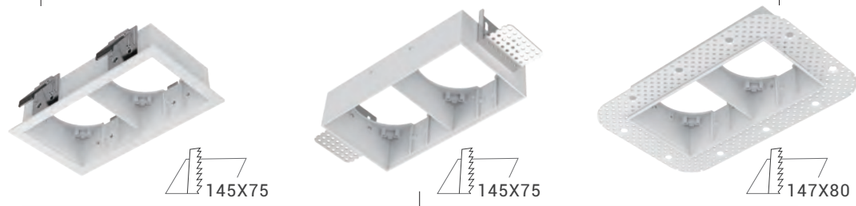


145X75 145X75 147X80

Reflector



Decoration Ring



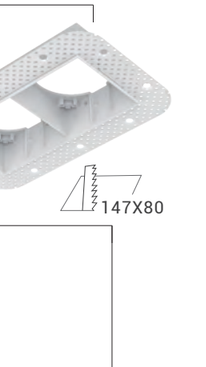




TSA1D



TSA2D




TSA3D



KSA1D-EI



KSA2D-EI



KSA3D-EI



KSA1D



KSA2D



KSA3D



Matt White Black Gold



Matt White Black Gold

Black White Wood Marble



Matt White Black Gold

Matt Black Gold



TA5





M3+TA5



M4+TA5



M4 PRO+TA5

TA6





M3+TA6



M4+TA6



M4 PRO+TA6

KA5-EI





M3+KA5-EI



M4+KA5-EI



M4 PRO+KA5-EI

KA6-EI





M3+KA6-EI



M4+KA6-EI



M4 PRO+KA6-EI

KA5





M3+KA5



M4+KA5



M4 PRO+KA5

KA6





M3+KA6



M4+KA6



M4 PRO+KA6

TA7





M3+TA7



M4+TA7



M4 PRO+TA7

TA8





M3+TA8



M4+TA8



M4 PRO+TA8

KA7-EI





M3+KA7-EI



M4+KA7-EI



M4 PRO+KA7-EI

KA8-EI





M3+KA8-EI



M4+KA8-EI



M4 PRO+KA8-EI

KA7

M3+KA7

M4+KA7

M4 PRO+KA7

KA8

M3+KA8

M4+KA8

M4 PRO+KA8

TF5




M3+TF5




M4+TF5




M4 PRO+TF5



TRF1/ TRF1-IP44




M3+TRF1-IP44




M4+TRF1-IP44




M4 PRO+TRF1-IP44



TA5-IP65




M3+TA5-IP65




M4+TA5-IP65




M4 PRO+TA5-IP65



KF5-EI




M3+KF5-EI




M4+KF5-EI




M4 PRO+KF5-EI



KRF1-EI/ KRF1-EI-IP44




M3+KRF1-EI-IP44




M4+KRF1-EI-IP44




M4 PRO+KRF1-EI-IP44



KF5




M3+KF5




M4+KF5



M4 PRO+KF5


KRF1/ KRF1-IP44

M3+KRF1-IP44

M4+KRF1-IP44

M4 PRO+KRF1-IP44

TSF1




M+TSF1





M4+TSF1




M4 PRO+TSF1



TSA1




M3+TSA1




M4+TSA1




M4 PRO+TSA1



KSF1-EI




M3+KSF1-EI





M4+KSF1-EI




M4 PRO+KSF1-EI



KSA1-EI




M3+KSA1-EI





M4+KSA1-EI




M4 PRO+KSA1-EI



KSF1




M3+KRF1





M4+KRF1




M4 PRO+KRF1



KSA1




M3+KSA1




M4+KSA1



M4 PRO+KSA1

TSA2

M3+TSA2

M4+TSA2

M4 PRO+TSA2

TSA3

M3+TSA3

M4+TSA3

M4 PRO+TSA3

KSA2-EI

M3+KSA2-EI

M4+KSA2-EI

M4 PRO+KSA2-EI

KSA3-EI

M3+KSA3-EI

M4+KSA3-EI

M4 PRO+KSA3-EI

KSA2

M3+KSA2

M4+KSA2

M4 PRO+KSA2

KSA3

M3+KSA3


M4+KSA3

M4 PRO+KSA3

TSA1D

145X75 | 355° | 30° | UK CA | CE






TSA2D

145X75 | UK CA | CE






TSA3D


145X75 | 355° | 18° | UK CA | CE






KSA1D-EI

145X80 | 355° | 30° | UK CA | CE






KSA2D-EI


145X80 | UK CA | CE






KSA3D-EI

145X80 | 355° | 18° | UK CA | CE






KSA1D

145X75 | 355° | 30° | UK CA | CE






KSA2D

145X75 | UK CA | CE






KSA3D

145X75 | 355° | 18° | UK CA | CE





SKYJACK

Fast Connection Box Included
Supplied with Phase Dim Driver




SKYJACK A68 – Classic Tiltable Downlight



38° | ±30° Tiltable | 2700K 3000K | CRI >90 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Trim Finish



Black(BB) White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	38°	900lm	720lm	SJA1-9273809P-WW
							900lm	720lm	SJA1-9273809P-BB
					3000K	38°	950lm	750lm	SJA1-9303809P-WW
							950lm	750lm	SJA1-9303809P-BB

Code Remark: P=P(Phase Dim)


SKYJACK A68 – Classic Tiltable Downlight



38° | ±30° Tiltable | 1800K 3000K Dim to Warm | CRI >90 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 6W, CRI>90
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°
- Lumen Output: Up to Max.450lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim



Light Distribution

3000K



Trim Finish



Black(BB) White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	18V	350mA	90	1800K-3000K	38°	650lm	Max.450lm	SJA1-9D33806P-WW
							650lm	Max.450lm	SJA1-9D33806P-BB

Code Remark: P=P(Phase Dim)




SKYJACK D – Recessed Architectural Tiltable Downlight



38° | Cut-off 30° | ±30° Tiltable | 2700K 3000K | CRI >90 | UGR<19 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø70mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Trim Finish



Black(BB)

White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	38°	900lm	700lm	SJD-9273809P-WW
							900lm	650lm	SJD-9273809P-BB
					3000K	38°	950lm	750lm	SJD-9303809P-WW
							950lm	700lm	SJD-9303809P-BB

Code Remark: P=P(Phase Dim)


SKYJACK D-DW – Recessed Architectural Tiltable Downlight



38° | Cut-off 30° | ±30° Tiltable | 1800K 3000K Dim to Warm | CRI >90 | UGR<19 | IP44 | CE | bridgelux 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø70mm
- Bridgelux LED: 6W, CRI>90, Bridgelux
- CCT: Dim to Warm 1800K-3000K
- Beam Angle: 38°
- Lumen Output: Up to Max.450lm System Luminous Flux
- IP Class: IP44 from Front
- LED Driver: Phase Dim



Light Distribution


3000K



Trim Finish



Black(BB)



White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
6W	8W	18V	350mA	90	1800K-3000k	38°	650lm	Max.450lm	SJD-9D33806P-WW
							650lm	Max.400lm	SJD-9D33806P-BB

Code Remark: P=P(Phase Dim)




SKYJACK F – IP65 Fixed Downlight






Quick Info

- Ceiling Cut-out: Ø68mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K
- Beam Angle: 38°
- Lumen Output: Up to 750lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Trim Finish



Black(BB)

White(WW)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	38°	900lm	720lm	SJF-9273809P-WW
							900lm	720lm	SJF-9273809P-BB
					3000K	38°	950lm	750lm	SJF-9303809P-WW
							950lm	750lm	SJF-9303809P-BB

Code Remark: P=P(Phase Dim)



Project: Application reference

FUSION MINI

Trim and trimless options available
Precise optics with minimal visual intrusion
Modular platform for seamless design integration
Extreme compactness with powerful performance



New

FUSION MINI


A compact linear downlight system designed for minimal visual presence, offering multi-head configurations and modular construction to ensure ceiling consistency, flexible installation, and easy maintenance for refined architectural interiors.



unit:mm



Honeycomb
(Optional)



FM2



FM3



FM4



FM6



FUSION MINI FM2 – Fixed Downlight

New




24° 40° Cut-off 45° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 45x25mm
- Bridgelux LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

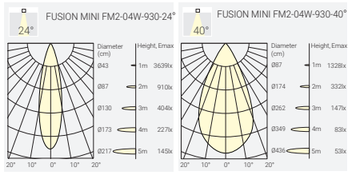

Finish



White Black

Order Info (FUSION MINI FM2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	24°	460lm	320lm	FM2-9272404N-WB
						40°	460lm	370lm	FM2-9274004N-WB
					3000K	24°	480lm	330lm	FM2-9302404N-WB
						40°	480lm	380lm	FM2-9304004N-WB
					4000K	24°	510lm	350lm	FM2-9402404N-WB
						40°	510lm	400lm	FM2-9404004N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding

FM2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FM2 FUSION MINI FM2	**927** CRI>90/ 2700K	**24** 24°	**04** 4W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION MINI FM3 – Fixed Downlight

New




24° 40° Cut-off 45° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 63x25mm
- Bridgelux LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 580lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

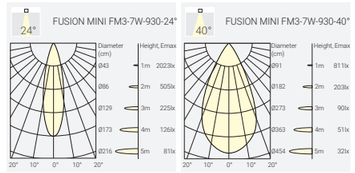

Finish




White Black

Trimless Version



FUSION MINI FMT3



Order Info (FUSION MINI FM3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	90	2700K	24°	700lm	440lm	FM3-9272407N-WB
						40°	700lm	530lm	FM3-9274007N-WB
					3000K	24°	720lm	450lm	FM3-9302407N-WB
						40°	720lm	550lm	FM3-9304007N-WB
					4000K	24°	780lm	470lm	FM3-9402407N-WB
						40°	780lm	580lm	FM3-9404007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding

FM3 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FM3 FUSION MINI FM3	**927** CRI>90/ 2700K	**24** 24°	**07** 7W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
FMT3 FUSION MINI FMT3	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION MINI FM4 – Fixed Downlight

New




Trimless

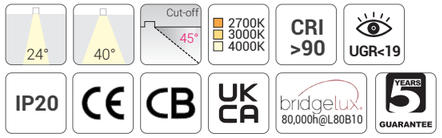

Quick Info


- Ceiling Cut-out: 84x25mm
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

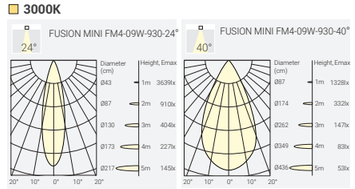

Finish



White Black

Order Info (FUSION MINI FM4 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12V	700mA	90	2700K	24°	920lm	600lm	FM4-9272409N-WB
						40°	920lm	740lm	FM4-9274009N-WB
					3000K	24°	960lm	630lm	FM4-9302409N-WB
						40°	960lm	760lm	FM4-9304009N-WB
					4000K	24°	1020lm	660lm	FM4-9402409N-WB
						40°	1020lm	800lm	FM4-9404009N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION MINI FMT4



Coding

FM4 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FM4 FUSION MINI FM4	**927** CRI>90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
FMT4 FUSION MINI FMT4	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			


FUSION MINI FM6 – Fixed Downlight

New




Trimless



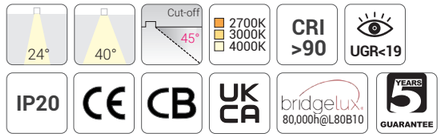

Quick Info


- Ceiling Cut-out: 120x25mm
- Bridgelux LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

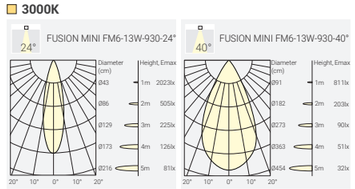

Finish



White Black

Order Info (FUSION MINI FM6 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18V	700mA	90	2700K	24°	1400lm	900lm	FM6-92724013N-WB
						40°	1400lm	1050lm	FM6-92740013N-WB
					3000K	24°	1440lm	950lm	FM6-93024013N-WB
						40°	1440lm	1100lm	FM6-93040013N-WB
					4000K	24°	1560lm	1000lm	FM6-94024013N-WB
						40°	1560lm	1150lm	FM6-94040013N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FUSION MINI FMT6



Coding

FM6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FM6 FUSION MINI FM6	**927** CRI>90/ 2700K	**24** 24°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
FMT6 FUSION MINI FMT6	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION G2

Modular architectural lighting family
Trim and trimless installation options
Consistent design language across the range
Multiple optics for accent and general lighting
Upgraded fixed downlight and new ceiling light
Wall washer, general light and spotlight options



Project: Eggen Restaurant, Åndalsnes, Norway

FUSION – The Narrow Linear Downlight Series

2700K, 3000K and 4000K options
CRI>90 with 3-step MacAdam consistency
On-Off, Phase Dim, 0-10V and DALI control

Available in trim and trimless versions
Fixed, adjustable, wall washer, general light and spotlight solutions

Ultra-compact dimensions for minimalist integration
Deep-recessed optics for glare control and visual comfort
Create continuous lines and circles of light with nano LED downlights

Trimless Version



Trim Version



FUSION – The Narrow Linear Downlight Series

FUSION G2 Fixed | FUSION G2 Adjustable | Wall Washer | General Light | Spotlight | Trimless Spotlight





37X37 FUSION G2 FF1 / 1 LED / 2W / 200 lm



62X37 FUSION G2 FF2 / 2 LED / 4W / 400 lm



90X37 FUSION G2 FF3 / 3 LED / 6W / 580 lm



65X65 FX4 / 4 LED / 9W / 650 lm



144X37 FUSION G2 FF5 / 5 LED / 11W / 900 lm



282X37 FUSION G2 FF10 / 10 LED / 22W / 1900 lm



152X44 FUSION G2 FFT5 / 5LED / 11W / 900 lm




290X44 FUSION G2 FFT10 / 10 LED / 22W / 1900 lm




160X52 FUSION G2 FA5 / 5 LED / 11W / 900 lm



298X52 FUSION G2 FA10 / 10 LED / 22W / 1900 lm





144X37 FW5 / 5 LED / 11W / 550 lm



282X37 FW10 / 10 LED / 22W / 1200 lm




152X44 FWT5 / 5 LED / 11W / 550 lm



290X44 FWT10 / 10 LED / 22W / 1200 lm




Secondary Reflector




Black | Specular

Beam



Medium 24° | Wide 40°



144X37 FG5 / 5 LED / 11W / 400 lm



282X37 FG10 / 10 LED / 22W / 850 lm




152X44 FGT5 / 5 LED / 11W / 400 lm




290X44 FGT10 / 10 LED / 22W / 850 lm

Flood

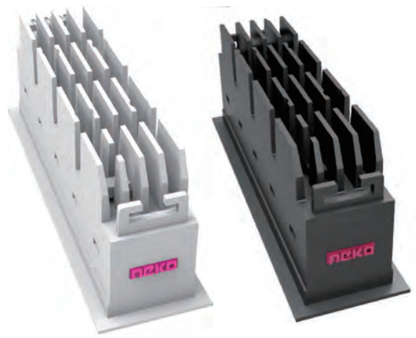



62X37 FS1 / 1 LED / 2W / 160 lm



90X37 FS2 / 2 LED / 4W / 330 lm



144X37 FS3 / 3 LED / 7W / 500 lm



282X37 FS6 / 6 LED / 14W / 900 lm



144X37 FF3-FS1 / 4 LED / 9W / 600 lm



282X37 FF6-FS2 / 8 LED / 18W / 1200 lm



152X44 FST3 / 3 LED / 7W / 500 lm



290X44 FST6 / 6 LED / 14W / 900 lm



152X44 FFT3-FST1 / 4 LED / 9W / 600 lm





290X44 FFT6-FST2 / 8 LED / 18W / 1200 lm

Project: Bvlgari Hotel, Shanghai, China





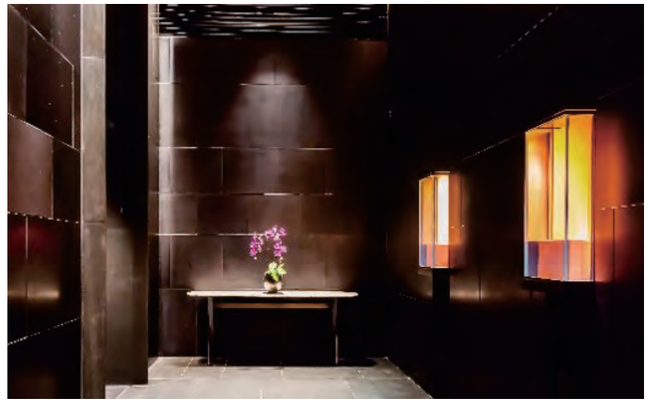


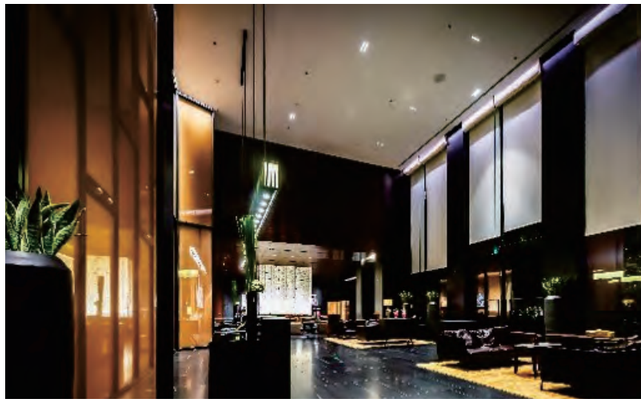

Project: Oslo Hall, City Hall Gallery, Norway



FUSION G2 FF1 – Fixed Downlight

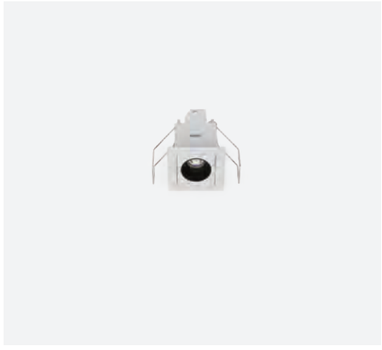


15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 80,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 37x37mm
- Bridgelux LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V, DALI Dim




Light Distribution

3000K

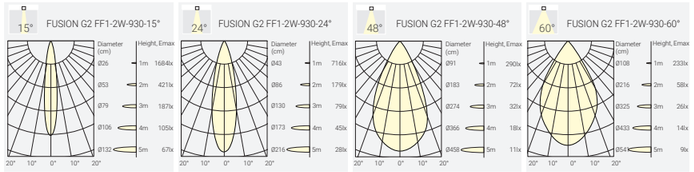

Finish



White Black

Order Info (FUSION G2 FF1 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	3V	700mA	90	2700K	15°	230lm	190lm	FF1G2-9271502N-WB
						24°	230lm	180lm	FF1G2-9272402N-WB
						48°	230lm	180lm	FF1G2-9274802N-WB
						60°	230lm	180lm	FF1G2-9276002N-WB
					3000K	15°	240lm	200lm	FF1G2-9301502N-WB
						24°	240lm	190lm	FF1G2-9302402N-WB
						48°	240lm	190lm	FF1G2-9304802N-WB
						60°	240lm	190lm	FF1G2-9306002N-WB
					4000K	15°	260lm	220lm	FF1G2-9401502N-WB
						24°	260lm	200lm	FF1G2-9402402N-WB
						48°	260lm	200lm	FF1G2-9404802N-WB
						60°	260lm	200lm	FF1G2-9406002N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V) D=D(DALI Dim)

Coding

FF1G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF1G2 FUSION G2 FF1	**927** CRI>90/ 2700K	**15** 15°	**02** 2W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 0-10V			
				D DALI Dim			

FUSION G2 FF2 – Fixed Downlight




15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 80,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 62x37mm
- Bridgelux LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V, DALI Dim




Light Distribution

3000K

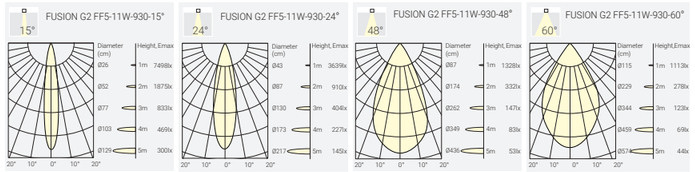

Finish



White Black

Order Info (FUSION G2 FF2 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	15°	460lm	380lm	FF2G2-9271510N-WB
						24°	460lm	350lm	FF2G2-9272410N-WB
						48°	460lm	350lm	FF2G2-9274810N-WB
						60°	460lm	350lm	FF2G2-9276010N-WB
					3000K	15°	480lm	400lm	FF2G2-9301510N-WB
						24°	480lm	360lm	FF2G2-9302410N-WB
						48°	480lm	360lm	FF2G2-9304810N-WB
						60°	480lm	360lm	FF2G2-9306010N-WB
					4000K	15°	510lm	420lm	FF2G2-9401510N-WB
						24°	510lm	380lm	FF2G2-9402410N-WB
						48°	510lm	380lm	FF2G2-9404810N-WB
						60°	510lm	380lm	FF2G2-9406010N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V) D=D(DALI Dim)

Coding

FF2G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2G2 FUSION G2 FF2	**927** CRI>90/ 2700K	**15** 15°	**04** 4W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 0-10V			
				D DALI Dim			

FUSION G2 FF3 – Fixed Downlight





15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 90x37mm
- Bridgelux LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V, DALI Dim





Light Distribution

3000K

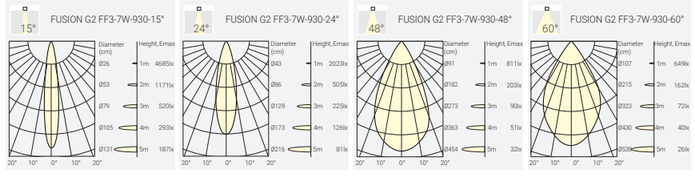

Finish



White Black

Order Info (FUSION G2 FF3 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	80	2700K	15°	700lm	560lm	FF3G2-9271507N-WB
						24°	700lm	500lm	FF3G2-9272407N-WB
						48°	700lm	500lm	FF3G2-9274807N-WB
						60°	700lm	500lm	FF3G2-9276007N-WB
					3000K	15°	720lm	580lm	FF3G2-9301507N-WB
						24°	720lm	520lm	FF3G2-9302407N-WB
						48°	720lm	520lm	FF3G2-9304807N-WB
						60°	720lm	520lm	FF3G2-9306007N-WB
					4000K	15°	780lm	600lm	FF3G2-9401507N-WB
						24°	780lm	550lm	FF3G2-9402407N-WB
						48°	780lm	550lm	FF3G2-9404807N-WB
						60°	780lm	550lm	FF3G2-9406007N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V) D=D(DALI Dim)

Coding

FF3G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3G2 FUSION G2 FF3	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**15** 15° **24** 24° **48** 48° **60** 60°	**07** 7W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V **D** DALI Dim	**W** White **B** Black	**B** Black	

FUSION FX4 – Fixed Downlight





24° 40° Cut-off 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 65x65mm
- OSRAM LED: 9W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K

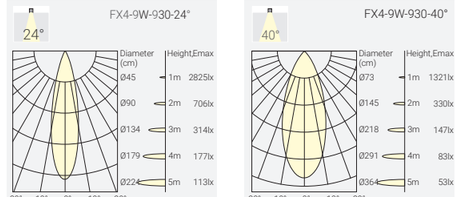

Finish



White Black

Reflector Options



Black Specular

Order Info (FUSION FX4 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12V	700mA	90	2700K	24°	750lm	550lm	FX4-9272409N-WB
						40°	750lm	550lm	FX4-9274009N-WB
					3000K	24°	800lm	600lm	FX4-9302409N-WB
						40°	800lm	600lm	FX4-9304009N-WB
					4000K	24°	900lm	650lm	FX4-9402409N-WB
						40°	900lm	650lm	FX4-9404009N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FX4 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FX4 FUSION FX4	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**24** 24° **40** 40°	**09** 9W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black **S** Specular	

FUSION G2 FF5 – Fixed Downlight

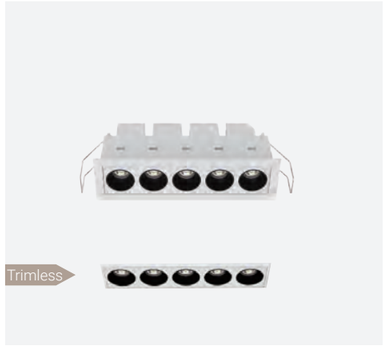


15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL US Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 144x37mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V, DALI Dim, Casambi Wireless Dim








Light Distribution

3000K

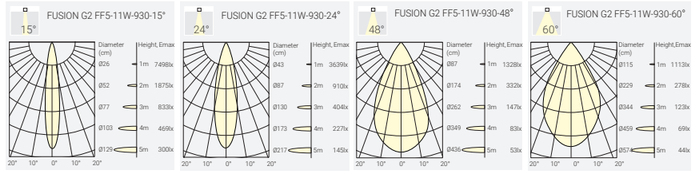

Finish



White Black

Order Info (FUSION G2 FF5 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	15°	1150lm	870lm	FF5G2-9271511N-WB
						24°	1150lm	830lm	FF5G2-9272411N-WB
						48°	1150lm	830lm	FF5G2-9274811N-WB
						60°	1150lm	830lm	FF5G2-9276011N-WB
					3000K	15°	1200lm	900lm	FF5G2-9301511N-WB
						24°	1200lm	850lm	FF5G2-9302411N-WB
						48°	1200lm	850lm	FF5G2-9304811N-WB
						60°	1200lm	850lm	FF5G2-9306011N-WB
					4000K	15°	1300lm	950lm	FF5G2-9401511N-WB
						24°	1300lm	900lm	FF5G2-9402411N-WB
						48°	1300lm	900lm	FF5G2-9404811N-WB
						60°	1300lm	900lm	FF5G2-9406011N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V) D=D(DALI Dim)

Trimless Version



FUSION G2 FFT5






Coding

FF5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5G2 FUSION G2 FF5	**927** CRI>90/ 2700K	**15** 15°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FFT5G2 FUSION G2 FFT5	**930** CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 0-10V			
				D DALI Dim			

FUSION G2 FF10 – Fixed Downlight

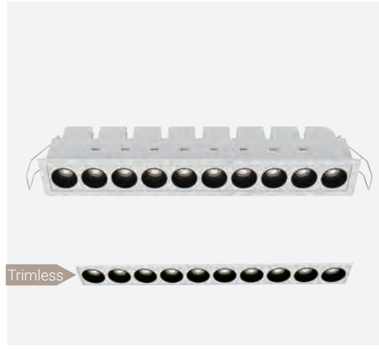


15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19


IP20 CE CB UKCA ETL US Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V, DALI Dim, Casambi Wireless Dim









Light Distribution

3000K

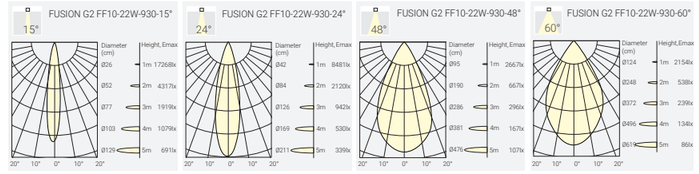

Finish



White Black

Order Info (FUSION G2 FF10 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	15°	2300lm	1850lm	FF10G2-9271522N-WB
						24°	2300lm	1800lm	FF10G2-9272422N-WB
						48°	2300lm	1800lm	FF10G2-9274822N-WB
						60°	2300lm	1850lm	FF10G2-9276022N-WB
					3000K	15°	2450lm	1900lm	FF10G2-9301522N-WB
						24°	2450lm	1850lm	FF10G2-9302422N-WB
						48°	2450lm	1850lm	FF10G2-9304822N-WB
						60°	2450lm	1900lm	FF10G2-9306022N-WB
					4000K	15°	2600lm	2000lm	FF10G2-9401522N-WB
						24°	2600lm	1950lm	FF10G2-9402422N-WB
						48°	2600lm	1950lm	FF10G2-9404822N-WB
						60°	2600lm	2000lm	FF10G2-9406022N-WB


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V) D=D(DALI Dim)

Trimless Version



FUSION G2 FFT10





Coding

FF10G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10G2 FUSION G2 FF10	**927** CRI>90/ 2700K	**15** 15°	**22** 22W	**N** No Driver	**W** White	**B** Black	
FFT10G2 FUSION G2 FFT10	**930** CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 0-10V			
				D DALI Dim			

FUSION FF2-IP65 – Surface IP65 FUSION Downlight




35° 45° 2700K 3000K 4000K CRI >90 UGR<19 IP65 CE CB UKCA Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 66x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 270lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF2-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	35°	400lm	240lm	FF2-9273504N-WB-IP
						45°	400lm	205lm	FF2-9274504N-WB-IP
					3000K	35°	450lm	250lm	FF2-9303504N-WB-IP
						45°	450lm	215lm	FF2-9304504N-WB-IP
					4000K	35°	500lm	270lm	FF2-9403504N-WB-IP
						45°	500lm	230lm	FF2-9404504N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF2 FF2-IP65	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**35** 35° **45** 45°	**04** 4W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black	**IP** IP65


FUSION FF3-IP65 – Surface IP65 FUSION Downlight




35° 45° 2700K 3000K 4000K CRI >90 UGR<19 IP65 CE CB UKCA Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 94x37mm
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 410lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FF3-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	90	2700K	35°	600lm	360lm	FF3-9273507N-WB-IP
						45°	600lm	315lm	FF3-9274507N-WB-IP
					3000K	35°	650lm	385lm	FF3-9303507N-WB-IP
						45°	650lm	335lm	FF3-9304507N-WB-IP
					4000K	35°	700lm	410lm	FF3-9403507N-WB-IP
						45°	700lm	350lm	FF3-9404507N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF3 FF3-IP65	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**35** 35° **45** 45°	**07** 7W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**B** Black	**IP** IP65

FUSION FF5-IP65 – Surface IP65 FUSION Downlight





35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA ETL Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 148x37mm
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 840lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF5-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	35°	950lm	745lm	FF5-9273511N-WB-IP
						45°	950lm	620lm	FF5-9274511N-WB-IP
					3000K	35°	1050lm	785lm	FF5-9303511N-WB-IP
						45°	1050lm	650lm	FF5-9304511N-WB-IP
					4000K	35°	1150lm	840lm	FF5-9403511N-WB-IP
						45°	1150lm	700lm	FF5-9404511N-WB-IP


Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FF5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF5 FF5-IP65	**927** CRI>90/ 2700K	**35** 35°	**11** 11W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION FF10-IP65 – Surface IP65 FUSION Downlight

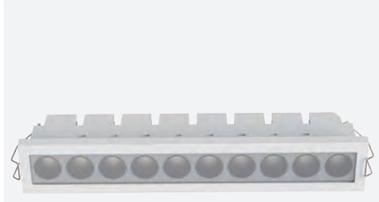



35° 45° 2700K 3000K 4000K CRI >90 UGR<19

IP65 CE CB UKCA ETL Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 286x37mm
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 45°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP65 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

3000K





Finish



White



Black

Order Info (FUSION FF10-IP65 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	35°	1900lm	1250lm	FF10-9273522N-WB-IP
						45°	1900lm	1200lm	FF10-9274522N-WB-IP
					3000K	35°	2050lm	1300lm	FF10-9303522N-WB-IP
						45°	2050lm	1250lm	FF10-9304522N-WB-IP
					4000K	35°	2200lm	1400lm	FF10-9403522N-WB-IP
						45°	2200lm	1300lm	FF10-9404522N-WB-IP

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding


FF10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FF10 FF10-IP65	**927** CRI>90/ 2700K	**35** 35°	**22** 22W	**N** No Driver	**W** White	**B** Black	**IP** IP65
	930 CRI>90/ 3000K	**45** 45°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION G2 FA5 – Adjustable Downlight








15° 24° 48° 60° Cut-off 35° 2700K 3000K 4000K CRI >90 UGR<19 IP20 CE CB UKCA Intertek bridgelux 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: 160x53mm for Trim Version
- Bridgelux LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V, DALI Dim, Casambi Wireless Dim

Light Distribution

3000K

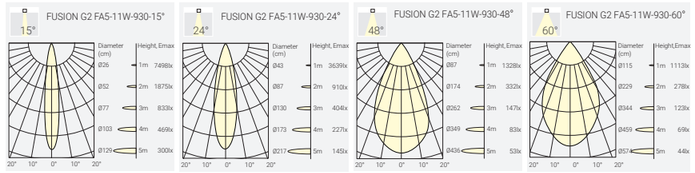

Finish



White Black

Order Info (FUSION G2 FA5 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	15°	1150lm	870lm	FA5G2-9271511N-WB
						24°	1150lm	830lm	FA5G2-9272411N-WB
						48°	1150lm	830lm	FA5G2-9274811N-WB
						60°	1150lm	830lm	FA5G2-9276011N-WB
					3000K	15°	1200lm	900lm	FA5G2-9301511N-WB
						24°	1200lm	850lm	FA5G2-9302411N-WB
						48°	1200lm	850lm	FA5G2-9304811N-WB
						60°	1200lm	850lm	FA5G2-9306011N-WB
					4000K	15°	1300lm	950lm	FA5G2-9401511N-WB
						24°	1300lm	900lm	FA5G2-9402411N-WB
						48°	1300lm	900lm	FA5G2-9404811N-WB
						60°	1300lm	900lm	FA5G2-9406011N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V) D=D(DALI Dim)


Coding

FA5G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA5G2 FUSION G2 FA5	**927** CRI>90/ 2700K	**15** 15°	**11** 11W	**N** No Driver	**W** White	**B** Black	
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K	**48** 48°		**P** Phase Dim			
		60 60°		**A** 0-10V			
				D DALI Dim			

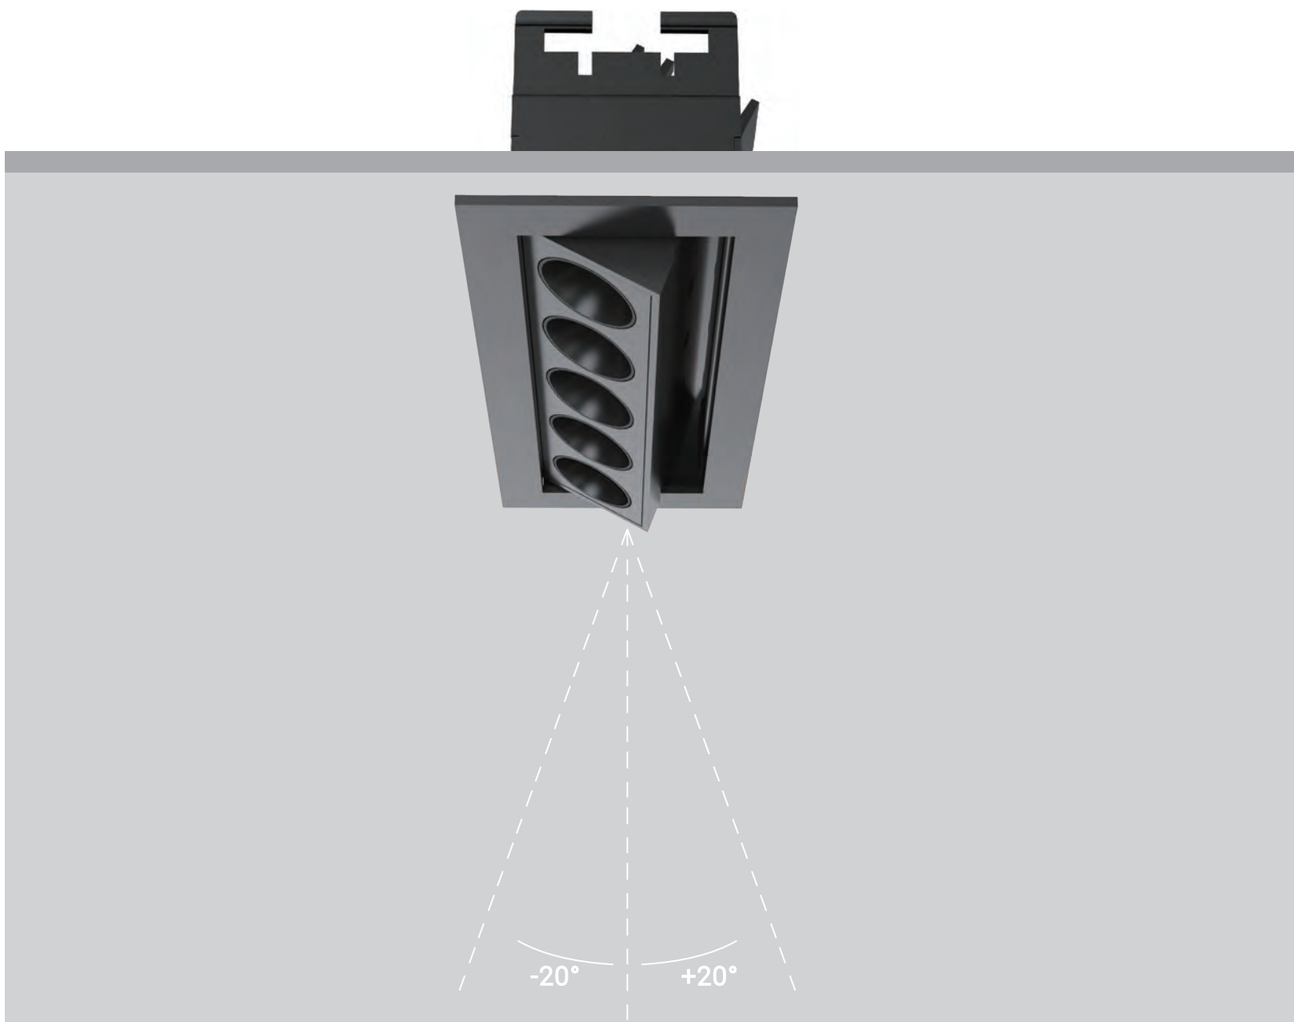

FUSION G2 FA10 – Adjustable Downlight

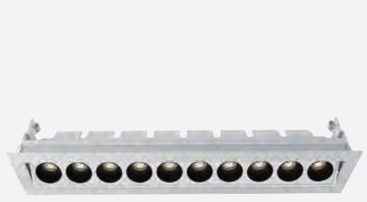



15° 24° 48° 60° | Cut-off 35° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 80,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 298x53mm for Trim Version
- Bridgelux LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 24°, 48°, 60°
- Lumen Output: Up to 2000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V, DALI Dim, Casambi Wireless Dim





Light Distribution

3000K

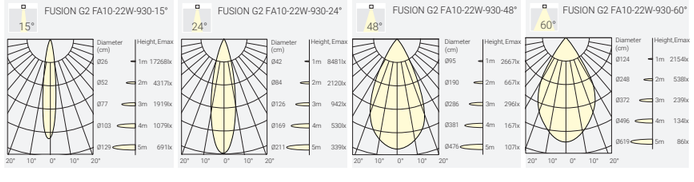

Finish



White



Black

Order Info (FUSION G2 FA10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	15°	2300lm	1850lm	FA10G2-9271522N-WB
						24°	2300lm	1800lm	FA10G2-9272422N-WB
						48°	2300lm	1800lm	FA10G2-9274822N-WB
						60°	2300lm	1850lm	FA10G2-9276022N-WB
					3000K	15°	2450lm	1900lm	FA10G2-9301522N-WB
						24°	2450lm	1850lm	FA10G2-9302422N-WB
						48°	2450lm	1850lm	FA10G2-9304822N-WB
						60°	2450lm	1900lm	FA10G2-9306022N-WB
					4000K	15°	2600lm	2000lm	FA10G2-9401522N-WB
						24°	2600lm	1950lm	FA10G2-9402422N-WB
						48°	2600lm	1950lm	FA10G2-9404822N-WB
						60°	2600lm	2000lm	FA10G2-9406022N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V) D=D(DALI Dim)

Coding

FA10G2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FA10G2 FUSION G2 FA10	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**15** 15° **24** 24° **48** 48° **60** 60°	**22** 22W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V **D** DALI Dim	**W** White **B** Black	**B** Black	

FUSION FW5 – Wall Washer Downlight




Wall Washer | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Finish




White Black

Trimless Version



FWT5



Order Info (FUSION FW5 in White Trim & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	WW	900lm	450lm	FW5-927WW11N-WM
					3000K	WW	950lm	500lm	FW5-930WW11N-WM
					4000K	WW	1050lm	550lm	FW5-940WW11N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FW5 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FW5 FUSION FW5 **FWT5** FUSION FWT5	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**WW** Wall Washer	**11** 11W	**N** No Driver **F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**M** Matt	

FUSION FW10 – Wall Washer Downlight




Wall Washer | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Finish



White



Black

Order Info (FUSION FW10 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	WW	2000lm	1000lm	FW10-927WW22N-WM
					3000K	WW	2200lm	1100lm	FW10-930WW22N-WM
					4000K	WW	2400lm	1200lm	FW10-940WW22N-WM

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version




FWT10




Coding


FW10 – * ** ** * – * * – ***

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FW10 FUSION FW10	**927** CRI>90/ 2700K	**WW** Wall Washer	**22** 22W	**N** No Driver	**W** White	**M** Matt	
FWT10 FUSION FWT10	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

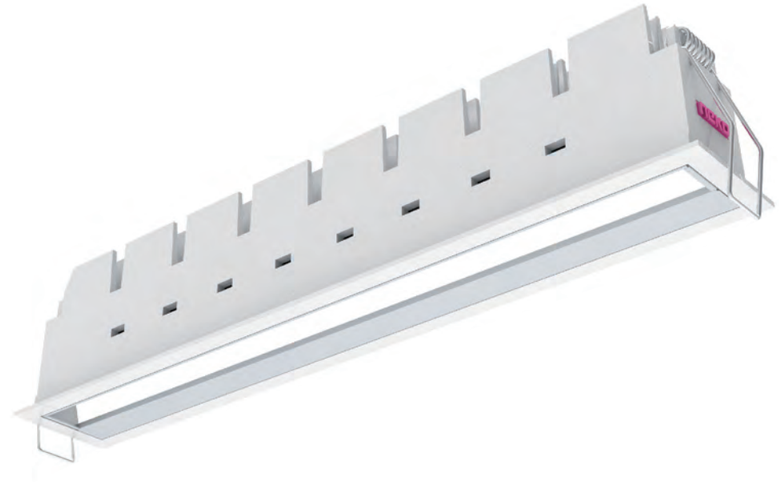

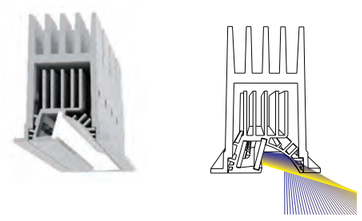

High quality wall washer illumination

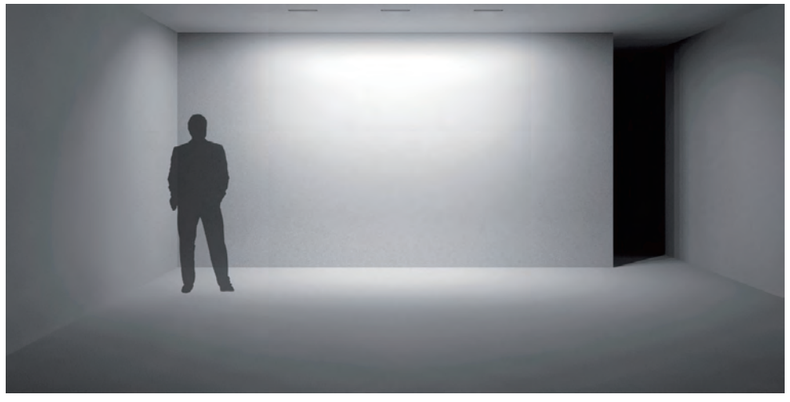

FUSION FG5 – General Downlight




75° | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 11W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 75°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Finish



White Black

Order Info (FUSION FG5 in White Trim & Black Reflector as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	75°	900lm	330lm	FG5-9277511N-WB
					3000K	75°	950lm	350lm	FG5-9277511N-WB
					4000K	75°	1050lm	400lm	FG5-9307511N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FGT5



Coding

FG5 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FG5 FUSION FG5	**927** CRI>90/ 2700K	**75** 75°	**11** 11W	**N** No Driver	**W** White	**B** Black	
FGT5 FUSION FGT5	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

FUSION FG10 – General Downlight




75° | 2700K 3000K 4000K | CRI >90

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 75°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K



Finish



White Black

Order Info (FUSION FG10 in White Trim & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700mA	90	2700K	75°	2000lm	750lm	FG10-9277522N-WB
					3000K	75°	2200lm	800lm	FG10-9307522N-WB
					4000K	75°	2400lm	850lm	FG10-9407522N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FGT10



Coding


FG10 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FG10 FUSION FG10	**927** CRI>90/ 2700K	**75** 75°	**22** 22W	**N** No Driver	**W** White	**B** Black	
FGT10 FUSION FGT10	**930** CRI>90/ 3000K			**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

Diversity Design with Adjustable Spot Light

















FUSION FS1 – Adjustable Spotlight




15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 62x37mm
- OSRAM LED: 2W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 160lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, No Driver, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS1 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	3V	700mA	90	2700K	15°	200lm	130lm	FS1-9271502N-WN
						30°	200lm	130lm	FS1-9273002N-WN
					3000K	15°	210lm	140lm	FS1-9301502N-WN
						30°	210lm	140lm	FS1-9303002N-WN
					4000K	15°	230lm	160lm	FS1-9401502N-WN
						30°	230lm	160lm	FS1-9403002N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

FS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS1 FUSION FS1	**927** CRI>90/ 2700K	**15** 15°	**02** 2W	**N** No Driver	**W** White	**N** None	
	930 CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**A** 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FS2 – Adjustable Spotlight




15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA ETL Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: 90x37mm
- OSRAM LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 330lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim






Light Distribution

3000K





Finish



White Black

Order Info (FUSION FS2 in White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	6V	700mA	90	2700K	15°	400lm	280lm	FS2-9271504N-WN
						30°	400lm	280lm	FS2-9273004N-WN
					3000K	15°	450lm	300lm	FS2-9301504N-WN
						30°	450lm	300lm	FS2-9303004N-WN
					4000K	15°	500lm	330lm	FS2-9401504N-WN
						30°	500lm	330lm	FS2-9403004N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


Coding

FS2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS2 FUSION FS2	**927** CRI>90/ 2700K	**15** 15°	**04** 4W	**N** No Driver	**W** White	**N** None	
	930 CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FS3 – Adjustable Spotlight

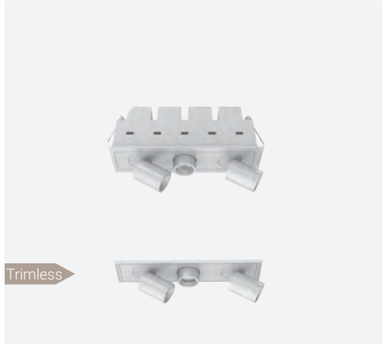


15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

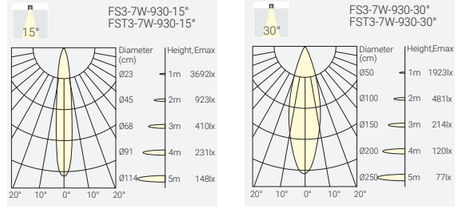

Finish



Order Info (FUSION FS3 in White Finish as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
7W	9W	9V	700mA	90	2700K	15°	600lm	420lm	FS3-9271507N-WN
						30°	600lm	420lm	FS3-9273007N-WN
					3000K	15°	650lm	450lm	FS3-9301507N-WN
						30°	650lm	450lm	FS3-9303007N-WN
					4000K	15°	700lm	500lm	FS3-9401507N-WN
						30°	700lm	500lm	FS3-9403007N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FST3




Coding

FS3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS3 FUSION FS3	**927** CRI>90/ 2700K	**15** 15°	**07** 7W	**N** No Driver	**W** White	**N** None	
FST3 FUSION FST3	**930** CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FS6 – Adjustable Spotlight

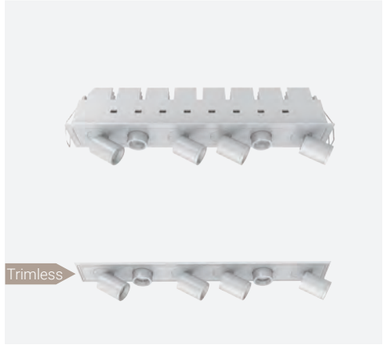


15° 30° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim




Light Distribution

3000K

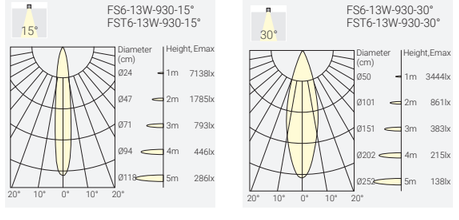

Finish



Order Info (FUSION FS6 in White Finish as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18V	700mA	90	2700K	15°	1200lm	800lm	FS6-9271513N-WN
						30°	1200lm	800lm	FS6-9273013N-WN
					3000K	15°	1300lm	850lm	FS6-9301513N-WN
						30°	1300lm	850lm	FS6-9303013N-WN
					4000K	15°	1400lm	900lm	FS6-9401513N-WN
						30°	1400lm	900lm	FS6-9403013N-WN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FST6



Coding

FS6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FS6 FUSION FS6	**927** CRI>90/ 2700K	**15** 15°	**13** 13W	**N** No Driver	**W** White	**N** None	
FST6 FUSION FST6	**930** CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FF3-FS1 – Adjustable Spotlight




24° 40° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- Ceiling Cut-out: 144x37mm for Trim Version
- OSRAM LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

3000K





Finish



White Black

Order Info (FUSION FFS1 in White Finish as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	12V	700mA	90	2700K	24°	750lm	500lm	FFS1-9272409N-WB
						40°	750lm	500lm	FFS1-9274009N-WB
					3000K	24°	800lm	550lm	FFS1-9302409N-WB
						40°	800lm	550lm	FFS1-9304009N-WB
					4000K	24°	900lm	600lm	FFS1-9402409N-WB
						40°	900lm	600lm	FFS1-9404009N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FFT3-FST1



Coding

FFS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FFS1 FUSION FFS1	**927** CRI>90/ 2700K	**24** 24°	**09** 9W	**N** No Driver	**W** White	**N** None	
FFS3 FUSION FFT3-FST1	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

FUSION FF6-FS2 – Adjustable Spotlight




24° 40° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA Intertek bridgelux. 80,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- Ceiling Cut-out: 282x37mm for Trim Version
- OSRAM LED: 17W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim




Light Distribution

3000K





Finish



White Black

Order Info (FUSION FFS2 in White Finish as an Example)


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	24V	700mA	90	2700K	24°	1500lm	1050lm	FFS2-9272417N-WB
						40°	1500lm	1050lm	FFS2-9274017N-WB
					3000K	24°	1600lm	1100lm	FFS2-9302417N-WB
						40°	1600lm	1100lm	FFS2-9304017N-WB
					4000K	24°	1800lm	1200lm	FFS2-9402417N-WB
						40°	1800lm	1200lm	FFS2-9404017N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Trimless Version



FFT6-FST2



Coding

FFS2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
FFS2 FUSION FFS2	**927** CRI>90/ 2700K	**24** 24°	**17** 17W	**N** No Driver	**W** White	**N** None	
FFS4 FUSION FFT6-FST2	**930** CRI>90/ 3000K	**40** 40°		**F** On-Off	**B** Black		
	940 CRI>90/ 4000K			**P** Phase Dim			
				A 0-10V Dim			
				D DALI Dim			

*In same BRIDGELUX LED chip as FUSION G2 series is optional.

Project: Application reference



FUSION FX4-FC – Fixed Ceiling Light


New



38° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | UKCA | bridgelux 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- BRIDGELUX LED: 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim




Light Distribution

3000K



Finish



White Black

Order Info (FUSION FX4-FC in White & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	12V	700mA	90	2700K	38°	950lm	750lm	FX4FC-9273810F-WB
						38°	950lm	750lm	FX4FC-9273810F-BB
					3000K	38°	1000lm	800lm	FX4FC-9303810F-WB
						38°	1000lm	800lm	FX4FC-9303810F-BB
					4000K	38°	1050lm	850lm	FX4FC-9403810F-WB
						38°	1050lm	850lm	FX4FC-9403810F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black

Coding

FX4FC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
FX4FC FX4-FC-10W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	38 38°	10 10W	F On-Off D DALI Dim	W White B Black	B Black	

FUSION FF5-FC – Fixed Ceiling Light


New



38° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | UKCA | bridgelux 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- BRIDGELUX LED: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (FUSION FF5-FC in White & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	15V	700mA	90	2700K	38°	1250lm	1000lm	FF5FC-9273813F-WB
						38°	1250lm	1000lm	FF5FC-9273813F-BB
					3000K	38°	1300lm	1050lm	FF5FC-9303813F-WB
						38°	1300lm	1050lm	FF5FC-9303813F-BB
					4000K	38°	1350lm	1150lm	FF5FC-9403813F-WB
						38°	1350lm	1150lm	FF5FC-9403813F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black

Coding

FF5FC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
FF5FC FF5-FC-13W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	38 38°	13 13W	F On-Off D DALI Dim	W White B Black	B Black	

FUSION FF10-FC – Fixed Ceiling Light


New



38° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | UKCA | bridgelux 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- BRIDGELUX LED: 22W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 38°
- Lumen Output: Up to 2250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Light Distribution

3000K



Finish



White



Black

Reflector Options



Black


Order Info (FUSION FF10-FC in White & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	24W	30V	700 mA	90	2700K	38°	2500lm	2000lm	FF10FC-9273824F-WB
						38°	2500lm	2000lm	FF10FC-9273824F-BB
					3000K	38°	2600lm	2050lm	FF10FC-9303824F-WB
						38°	2600lm	2050lm	FF10FC-9303824F-BB
					4000K	38°	2700lm	2250lm	FF10FC-9403824F-WB
						38°	2700lm	2250lm	FF10FC-9403824F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

FF10FC	–	***		**		**		*	–	*		*		–	*
Model		**CRI/ CCT**		**Beam Angle**		**Power**		**Control**		**Finish**		**Reflector Color**			**Accessory**
FF10FC FF10-FC-22W		**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K		**38** 38°		**24** 24W		**F** On-Off **D** DALI Dim		**W** White **B** Black		**B** Black			

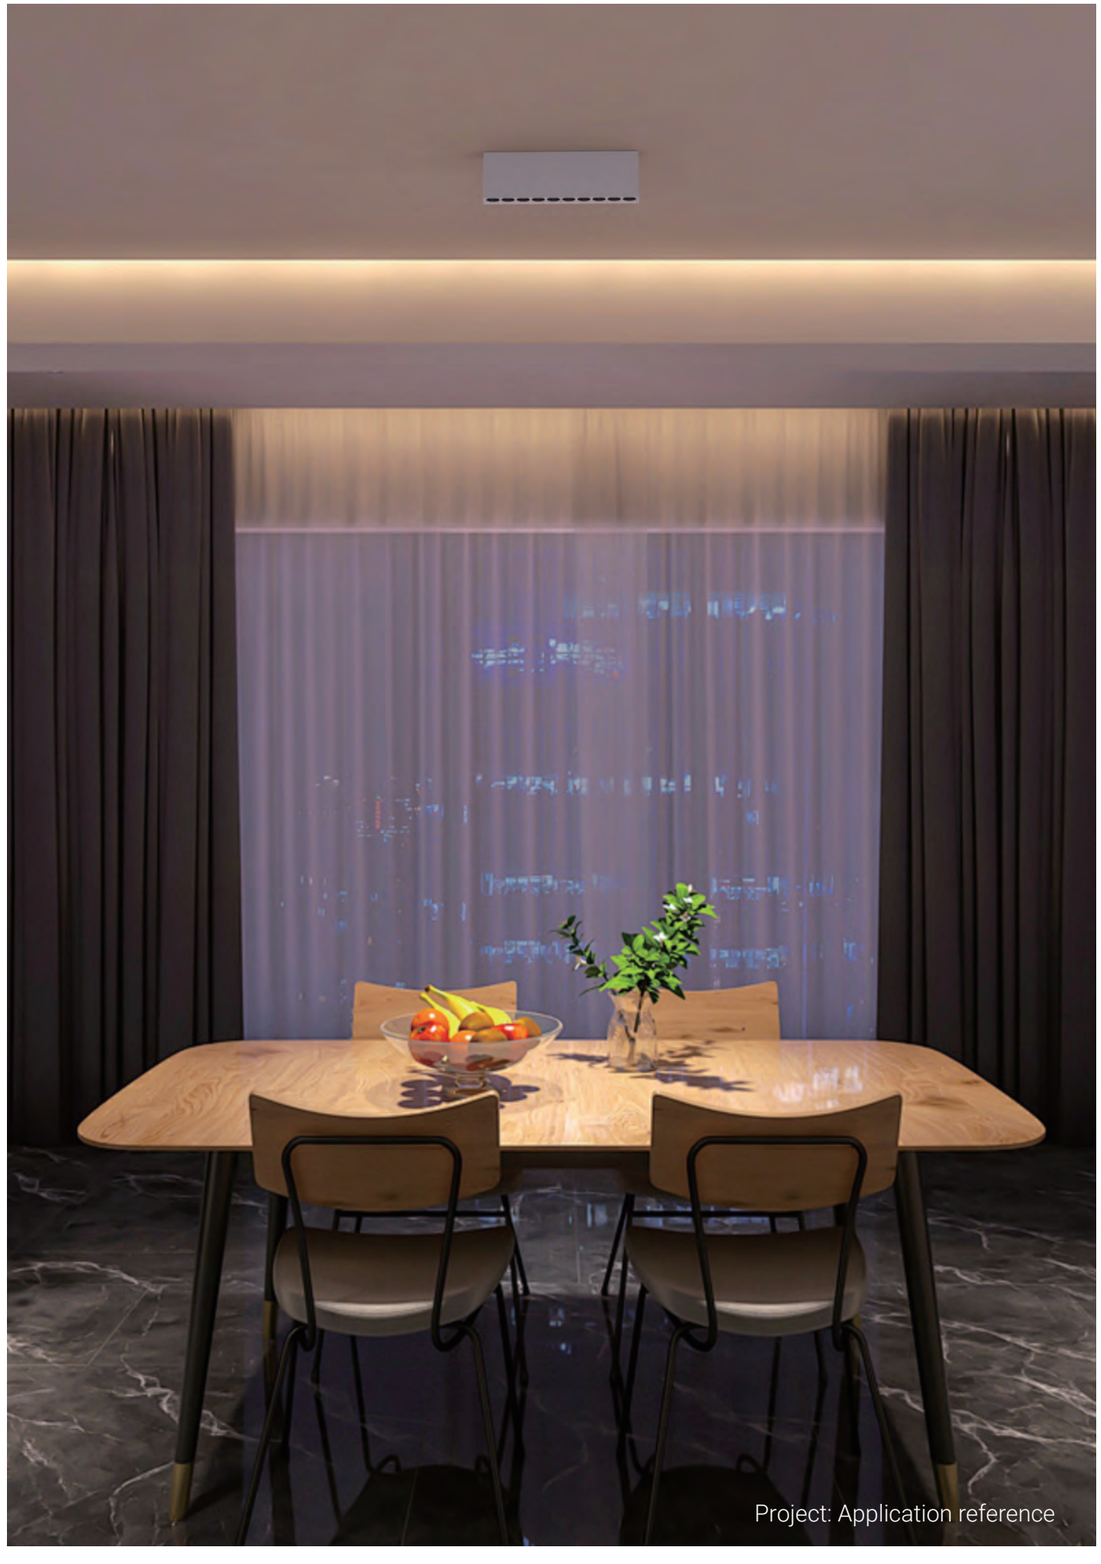

Project: Application reference


FUSION
Linear System


Opal, accent, spotlight and wall washer optics
Seamless integration with FUSION downlights
50 mm profile width with customizable lengths
Modular linear profile system for design flexibility
Pendant, surface, recessed and trimless versions




Project: Office Shire House, Bradford, UK

FUSION Linear System – Modular Design Flexible Linear Profile System

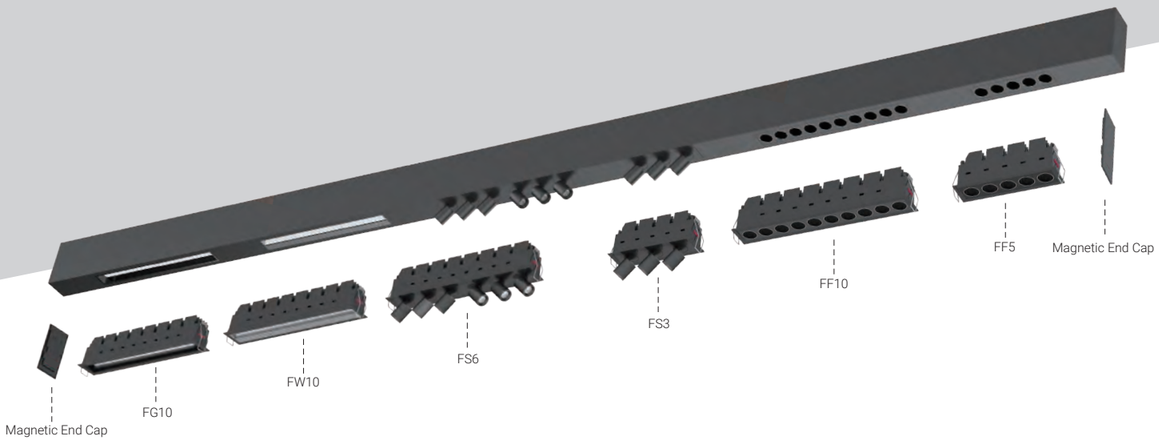


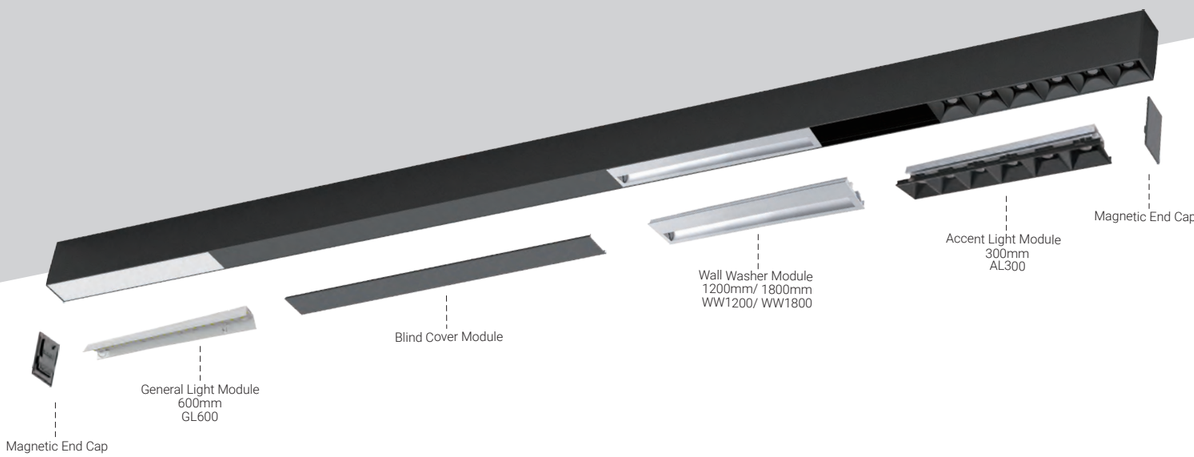


Flexible linear system with multiple module combinations.
Available in suspended, surface-mounted and recessed versions.

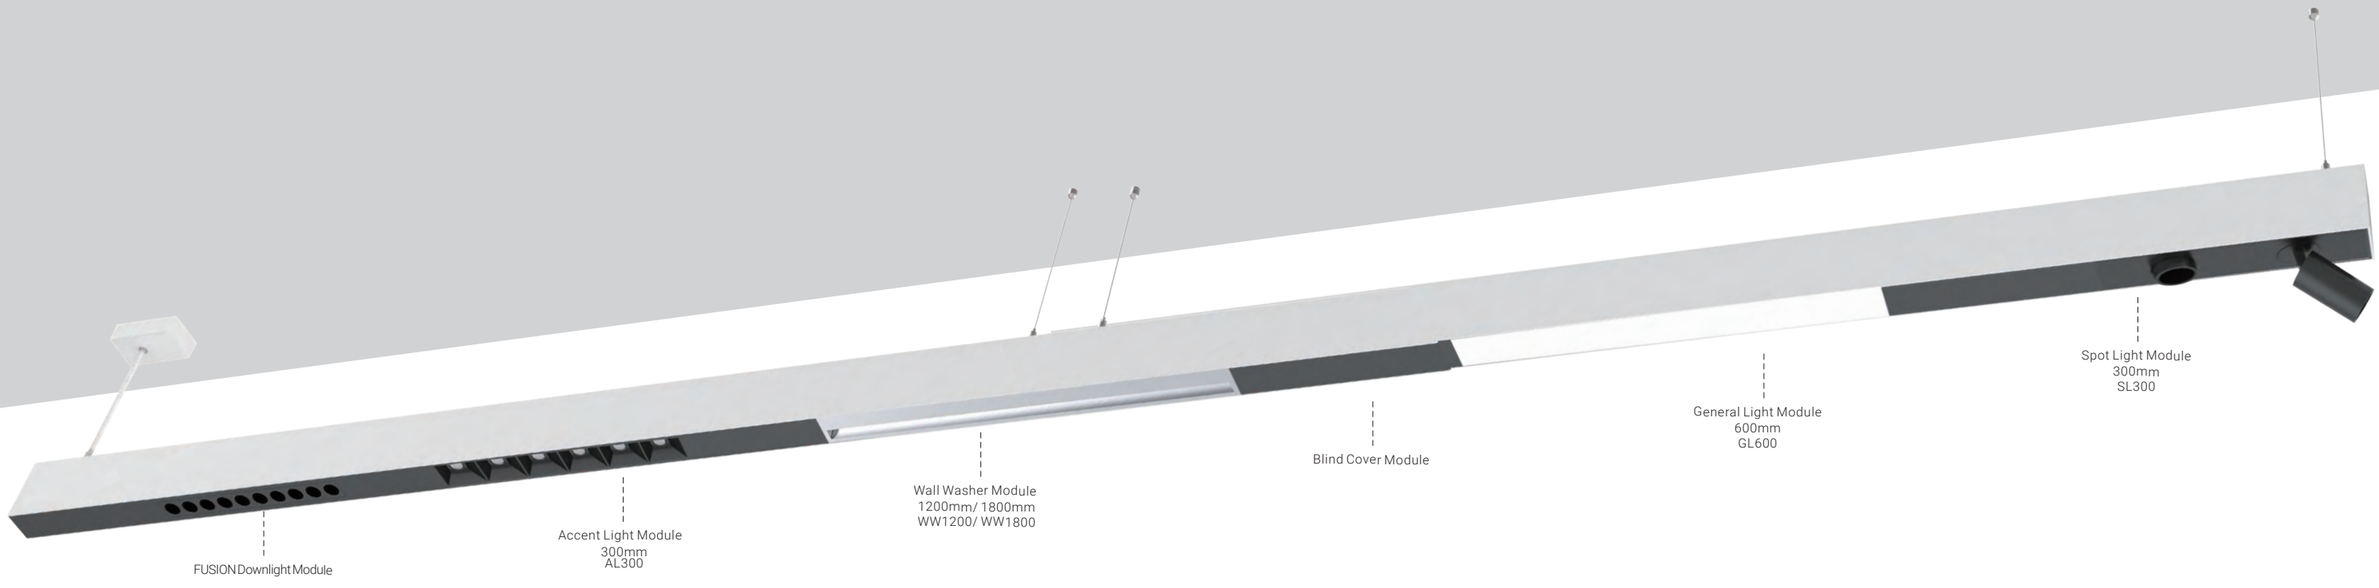


FUSION Linear System – Modular Design Flexible Linear Profile System

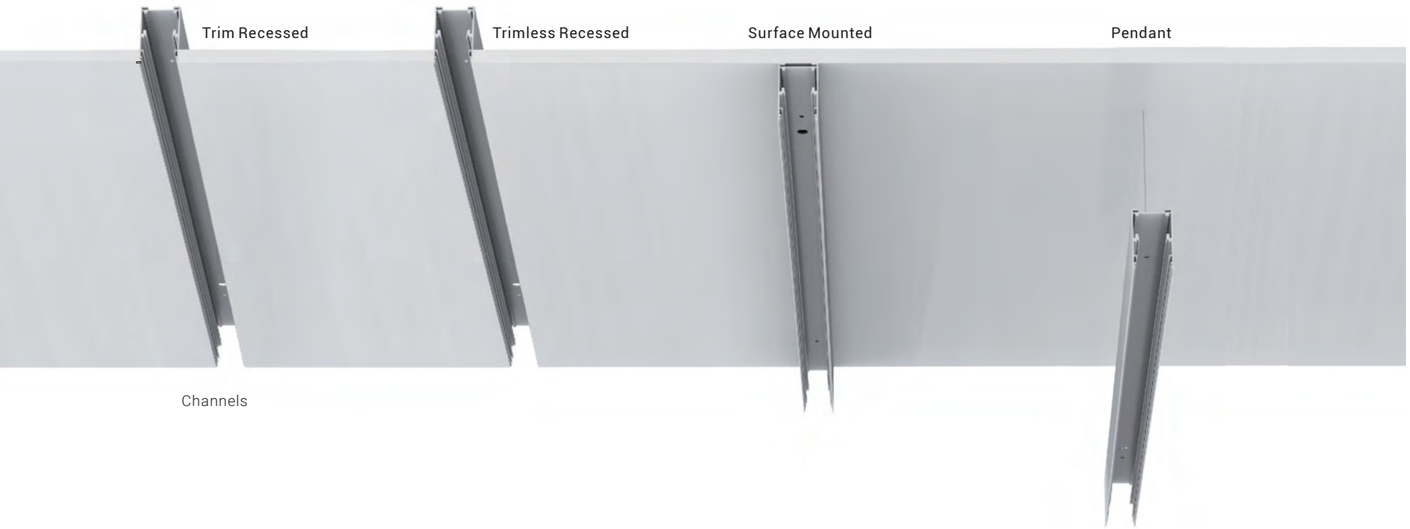

Corner Modules and Linear Connector

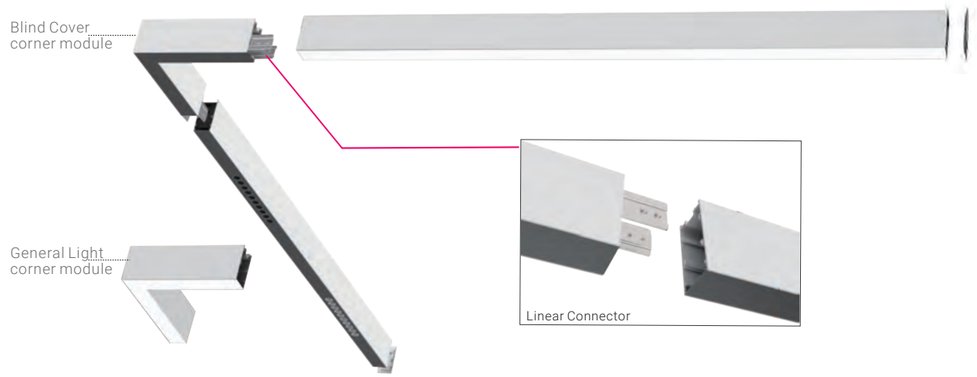

Inserts

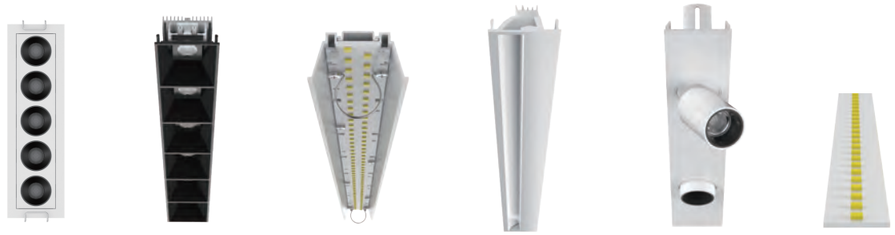

FUSION Module (FF/ FW/ FS/ FG)

Accent Light Module (300mm)

General Light Module (600mm)

Wall Washer Module (1200mm/1800mm)

Spot Light Module (300mm)

Uplight Module (1070mm/ 1605mm)

Covers



Blind Cover

Opal Cover

Flexible Opal Cover

Mounting Kits




Recessed Mounting Kit (2pcs/ Set)

Surface Mounted Kit (2pcs/ Set)

Pendant Kit (Ceiling Box in White/ Black)

System details

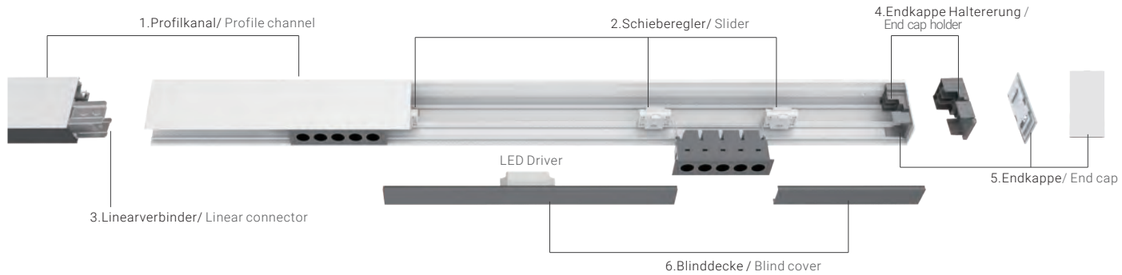



Intelligentes Linear-Profildesign
Einfachste Installation der Fusion-Einbauleuchte in den Profilkanal

Smart linear profile design
Easy to install fusion downlight into profile channel

Project: Office Shire House, Bradford, UK




FUSION Linear System – General Light Module




105° | 2700K 3000K 4000K | CRI >80 | CRI >90 | CE | CB | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info


- Linkable General Light Module
- General Light Version also Available
- SAMSUNG LED: 11W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 105°
- Lumen Output: Up to 1900lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	46V	250mA	80	2700K	105°	1600lm	1200lm	GL600-11W-827-105°N
					3000K	105°	1700lm	1300lm	GL600-11W-830-105°N
					4000K	105°	1800lm	1400lm	GL600-11W-840-105°N
				90	2700K	105°	1500lm	1100lm	GL600-11W-927-105°N
					3000K	105°	1600lm	1200lm	GL600-11W-930-105°N
					4000K	105°	1700lm	1300lm	GL600-11W-940-105°N
16W	18W	46V	300mA	80	2700K	105°	2100lm	1700lm	GL600-16W-827-105°N
					3000K	105°	2200lm	1800lm	GL600-16W-830-105°N
					4000K	105°	2400lm	1900lm	GL600-16W-840-105°N
				90	2700K	105°	1900lm	1600lm	GL600-16W-927-105°N
					3000K	105°	2000lm	1700lm	GL600-16W-930-105°N
					4000K	105°	2200lm	1900lm	GL600-16W-940-105°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


FUSION Linear System – Wall Washer Light Module




Wall Washer | 2700K 3000K 4000K | CRI >80 | CRI >90 | CE | CB | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info


- Wall Wash Light Module
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall washer
- Lumen Output: Up to 3700lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22W	26W	46V	500mA	80	2700K	WW	3200lm	1700lm	WW1200-22W-827N
					3000K	WW	3400lm	1800lm	WW1200-22W-830N
					4000K	WW	3600lm	1900lm	WW1200-22W-840N
				90	2700K	WW	3000lm	1500lm	WW1200-22W-927N
					3000K	WW	3200lm	1600lm	WW1200-22W-930N
					4000K	WW	3400lm	1700lm	WW1200-22W-940N
32W	36W	46V	700mA	80	2700K	WW	4600lm	2300lm	WW1200-32W-827N
					3000K	WW	4800lm	2500lm	WW1200-32W-830N
					4000K	WW	5000lm	2700lm	WW1200-32W-840N
				90	2700K	WW	4000lm	2000lm	WW1200-32W-927N
					3000K	WW	4200lm	2200lm	WW1200-32W-930N
					4000K	WW	4400lm	2400lm	WW1200-32W-940N
32W	36W	46V	700mA	80	2700K	WW	4600lm	2500lm	WW1800-32W-827N
					3000K	WW	4800lm	2700lm	WW1800-32W-830N
					4000K	WW	5000lm	2900lm	WW1800-32W-840N
				90	2700K	WW	4000lm	2100lm	WW1800-32W-927N
					3000K	WW	4200lm	2300lm	WW1800-32W-930N
					4000K	WW	4400lm	2500lm	WW1800-32W-940N
48W	52W	46V	700+350mA	80	2700K	WW	6200lm	3300lm	WW1800-48W-827N
					3000K	WW	6400lm	3500lm	WW1800-48W-830N
					4000K	WW	6600lm	3700lm	WW1800-48W-840N
				90	2700K	WW	5500lm	2900lm	WW1800-48W-927N
					3000K	WW	5700lm	3100lm	WW1800-48W-930N
					4000K	WW	5900lm	3300lm	WW1800-48W-940N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

FUSION Linear System – SL300-1S-4W Adjustable Spotlight Module




15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP20 | CE | CB | CREE 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Adjustable Spotlight Module
- CREE LED: 4W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 420lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

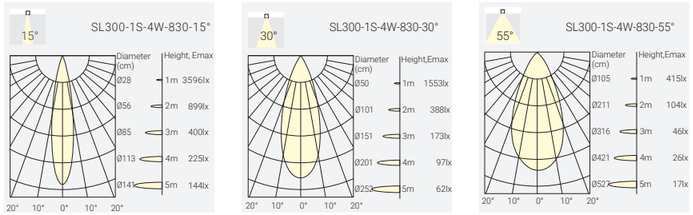

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	80	2700K	15°	470lm	350lm	SL300-1S-4W-827-15°N
						30°	470lm	350lm	SL300-1S-4W-827-30°N
						55°	470lm	350lm	SL300-1S-4W-827-55°N
					3000K	15°	500lm	380lm	SL300-1S-4W-830-15°N
						30°	500lm	380lm	SL300-1S-4W-830-30°N
						55°	500lm	380lm	SL300-1S-4W-830-55°N
					4000K	15°	550lm	420lm	SL300-1S-4W-840-15°N
						30°	550lm	420lm	SL300-1S-4W-840-30°N
						55°	550lm	420lm	SL300-1S-4W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

FUSION Linear System – SL300-2S-8W Adjustable Spotlight Module




15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP20 | CE | CB | CREE 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Adjustable Spotlight Module
- CREE LED: 8W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 750lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

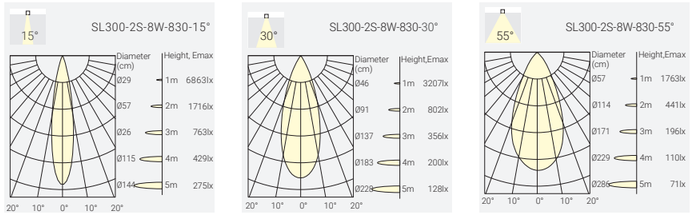

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	24V	350mA	80	2700K	15°	850lm	650lm	SL300-2S-8W-827-15°N
						30°	850lm	650lm	SL300-2S-8W-827-30°N
						55°	850lm	650lm	SL300-2S-8W-827-55°N
					3000K	15°	900lm	700lm	SL300-2S-8W-830-15°N
						30°	900lm	700lm	SL300-2S-8W-830-30°N
						55°	900lm	700lm	SL300-2S-8W-830-55°N
					4000K	15°	950lm	750lm	SL300-2S-8W-840-15°N
						30°	950lm	750lm	SL300-2S-8W-840-30°N
						55°	950lm	750lm	SL300-2S-8W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Project: Skyline Hill, Würzburg, Germany



FUSION Linear System – SL450-3S-13W Adjustable Spotlight Module




15° 30° 55° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP20 | CE | CB | CREE 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Adjustable Spotlight Module
- CREE LED: 13W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 55°
- Lumen Output: Up to 1100lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K Per Single Spot:

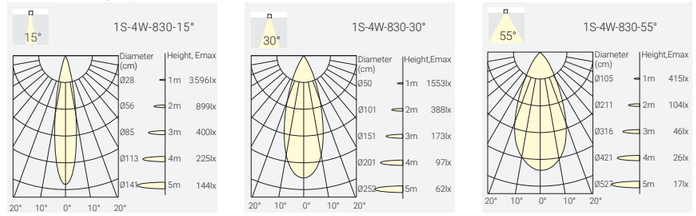

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	80	2700K	15°	1200lm	950lm	SL450-3S-13W-827-15°N
						30°	1200lm	950lm	SL450-3S-13W-827-30°N
						55°	1200lm	950lm	SL450-3S-13W-827-55°N
					3000K	15°	1300lm	1000lm	SL450-3S-13W-830-15°N
						30°	1300lm	1000lm	SL450-3S-13W-830-30°N
						55°	1300lm	1000lm	SL450-3S-13W-830-55°N
					4000K	15°	1400lm	1100lm	SL450-3S-13W-840-15°N
						30°	1400lm	1100lm	SL450-3S-13W-840-30°N
						55°	1400lm	1100lm	SL450-3S-13W-840-55°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

FUSION Linear System – AL300-13W Accent Light Module




15° 30° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

CE | CB | OSRAM 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info


- Accent Light Module
- OSRAM LED: 13W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 1300lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 0-10V Dim, DALI Dim





Light Distribution

3000K

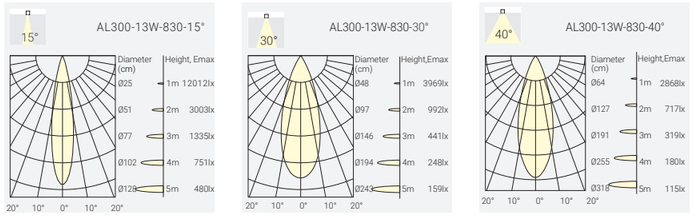


Order Info


LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	18V	700mA	80	2700K	15°	1300lm	1000lm	AL300-13W-827-15°N
						30°	1300lm	1000lm	AL300-13W-827-30°N
						40°	1300lm	1100lm	AL300-13W-827-40°N
					3000K	15°	1400lm	1100lm	AL300-13W-830-15°N
						30°	1400lm	1100lm	AL300-13W-830-30°N
						40°	1400lm	1200lm	AL300-13W-830-40°N
					4000K	15°	1500lm	1200lm	AL300-13W-840-15°N
						30°	1500lm	1200lm	AL300-13W-840-30°N
						40°	1500lm	1300lm	AL300-13W-840-40°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

FUSION Linear System – UL1200-11W/ UL1800-16W Uplight Module








Quick Info

- Uplight Module
- SAMSUNG LED: 11W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 2400lm System Luminous Flux
- LED Driver: No Driver, ON-OFF, Phase Dim, 0-10V Dim, DALI Dim

Light Distribution

3000K Per Single Spot:




Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11W	13W	46V	250mA	80	2700K	110°	1700lm	1500lm	UL1200-11W-827-110°N
					3000K	110°	1800lm	1600lm	UL1200-11W-830-110°N
					4000K	110°	1900lm	1700lm	UL1200-11W-840-110°N
16W	18W	46V	350mA	80	2700K	110°	2300lm	2000lm	UL1800-16W-827-110°N
					3000K	110°	2500lm	2200lm	UL1800-16W-830-110°N
					4000K	110°	2700lm	2400lm	UL1800-16W-840-110°N

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)



FUSION Linear System – Linear Downlight Profile System

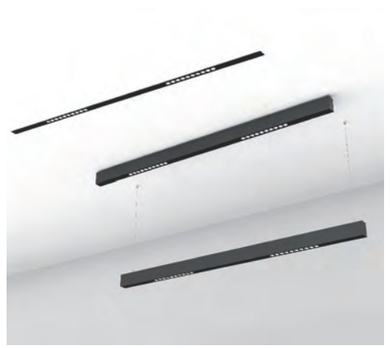




24° 40° 2700K 3000K 4000K CRI >80 CRI >90 UGR<19 IP20 CE CB OSRAM 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Linear Accent Light Profile System
- OSRAM LED: 44W, 22W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40° (FUSION G2 in 15°, 24°, 48°, 60°)
- Lumen Output: Up to 3800lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 0-10V Dim, DALI Dim

Light Distribution

3000K






Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
44W	48W	31+31V	700mA	80	2700K	24°	5000lm	3400lm	1500mm	FL1500(X)-2*FF10-48W-82724F-BB
						40°	5000lm	3400lm	1500mm	FL1500(X)-2*FF10-48W-82740F-BB
					3000K	24°	5200lm	3600lm	1500mm	FL1500(X)-2*FF10-48W-83024F-BB
						40°	5200lm	3600lm	1500mm	FL1500(X)-2*FF10-48W-83040F-BB
					4000K	24°	5600lm	3800lm	1500mm	FL1500(X)-2*FF10-48W-84024F-BB
						40°	5600lm	3800lm	1500mm	FL1500(X)-2*FF10-48W-84040F-BB
22W	26W	16+16V	700mA	80	2700K	24°	2400lm	1700lm	1200mm	FL1200(X)-2*FF5-26W-82724F-BB
						40°	2400lm	1700lm	1200mm	FL1200(X)-2*FF5-26W-82740F-BB
					3000K	24°	2600lm	1800lm	1200mm	FL1200(X)-2*FF5-26W-83024F-BB
						40°	2600lm	1800lm	1200mm	FL1200(X)-2*FF5-26W-83040F-BB
					4000K	24°	2800lm	1900lm	1200mm	FL1200(X)-2*FF5-26W-84024F-BB
						40°	2800lm	1900lm	1200mm	FL1200(X)-2*FF5-26W-84040F-BB

Code Remark: (X)=P(Pendant) (X)=S(Surface mounted) (X)=T(Trimless Recessed) (X)=F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

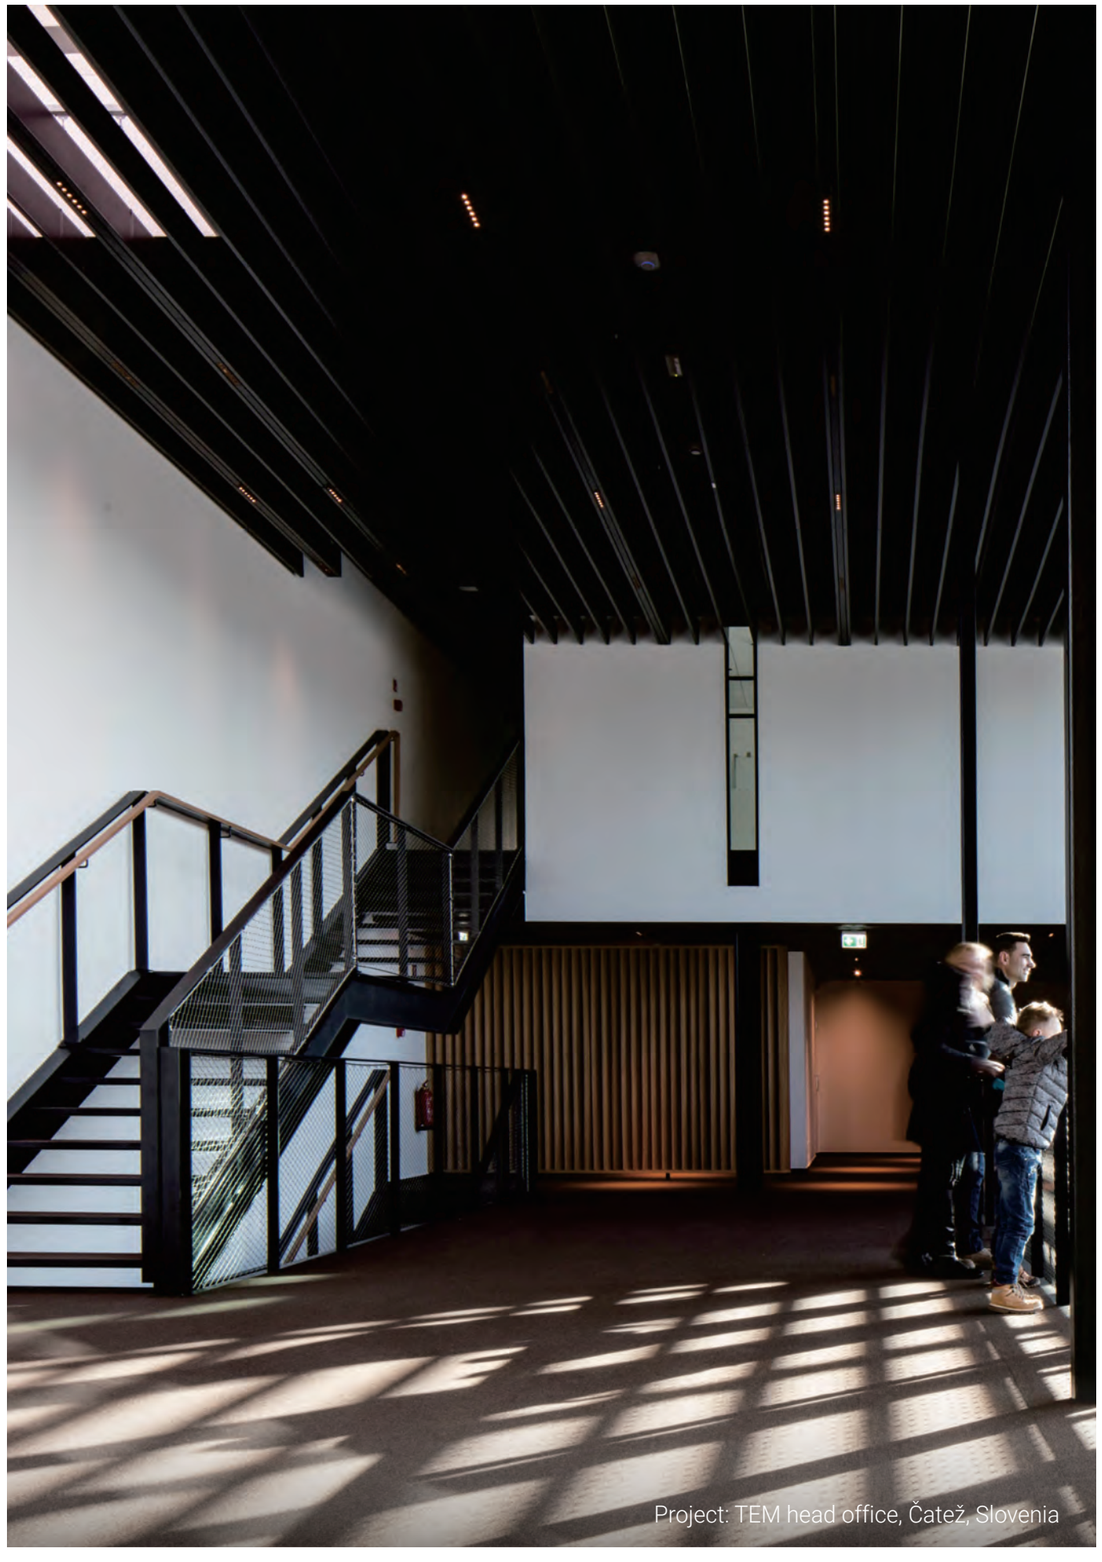

Project: TEM head office, Čatež, Slovenia

FUSION Linear System – Linear General Light Profile System



105° | 2700K 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Linear General Light Profile System
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90,
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 105°
- Lumen Output: Up to 5500lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K



Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
32W	36W	46V	700mA	80	2700K	105°	4600lm	3400lm	1800mm	FL1800(X)-GL1800-36W-827A1F-BN
					3000K	105°	4800lm	3600lm	1800mm	FL1800(X)-GL1800-36W-830A1F-BN
					4000K	105°	5000lm	3800lm	1800mm	FL1800(X)-GL1800-36W-840A1F-BN
48W	52W	46V	700+350mA	80	2700K	105°	6200lm	5000lm	1800mm	FL1800(X)-GL1800-52W-827A1F-BN
					3000K	105°	6400lm	5200lm	1800mm	FL1800(X)-GL1800-52W-830A1F-BN
					4000K	105°	7000lm	5500lm	1800mm	FL1800(X)-GL1800-52W-840A1F-BN
22W	26W	46V	500mA	80	2700K	105°	3200lm	2300lm	1200mm	FL1200(X)-GL1200-26W-827A1F-BN
					3000K	105°	3400lm	2700lm	1200mm	FL1200(X)-GL1200-26W-830A1F-BN
					4000K	105°	3600lm	2900lm	1200mm	FL1200(X)-GL1200-26W-840A1F-BN
32W	36W	46V	700mA	80	2700K	105°	4200lm	3400lm	1200mm	FL1200(X)-GL1200-36W-827A1F-BN
					3000K	105°	4400lm	3600lm	1200mm	FL1200(X)-GL1200-36W-830A1F-BN
					4000K	105°	4800lm	3800lm	1200mm	FL1200(X)-GL1200-36W-840A1F-BN

Code Remark: (X)=P(Pendant) (X)=S(Surface mounted) (X)=T(Trimless Recessed) (X)=F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)


FUSION Linear System – Linear Wall Washer Light Profile System



Wall Washer | 2700K 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Linear Wall Washer Light Profile System
- SAMSUNG LED: 22W, 32W, 48W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall washer
- Lumen Output: Up to 3700lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K



Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
32W	36W	46V	700mA	80	2700K	WW	4600lm	2500lm	1800mm	FL1800(X)-WW1800-36W-827WWF-BN
					3000K	WW	4800lm	2700lm	1800mm	FL1800(X)-WW1800-36W-830WWF-BN
					4000K	WW	5000lm	2900lm	1800mm	FL1800(X)-WW1800-36W-840WWF-BN
48W	52W	46V	700+350mA	80	2700K	WW	6200lm	3300lm	1800mm	FL1800(X)-WW1800-52W-827WWF-BN
					3000K	WW	6400lm	3500lm	1800mm	FL1800(X)-WW1800-52W-830WWF-BN
					4000K	WW	6600lm	3700lm	1800mm	FL1800(X)-WW1800-52W-840WWF-BN
22W	26W	46V	500mA	80	2700K	WW	3200lm	1700lm	1200mm	FL1200(X)-WW1200-26W-827WWF-BN
					3000K	WW	3400lm	1800lm	1200mm	FL1200(X)-WW1200-26W-830WWF-BN
					4000K	WW	3600lm	1900lm	1200mm	FL1200(X)-WW1200-26W-840WWF-BN
32W	36W	46V	700mA	80	2700K	WW	4200lm	2300lm	1200mm	FL1200(X)-WW1200-36W-827WWF-BN
					3000K	WW	4400lm	2500lm	1200mm	FL1200(X)-WW1200-36W-830WWF-BN
					4000K	WW	5000lm	2700lm	1200mm	FL1200(X)-WW1200-36W-840WWF-BN

Code Remark: (X)=P(Pendant) (X)=S(Surface mounted) (X)=T(Trimless Recessed) (X)=F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

FUSION Linear System – Linear Accent Light Profile System




15° 30° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP20 | CE | CB | OSRAM 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Linear Accent Light Profile System
- OSRAM LED: 26W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 2600lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

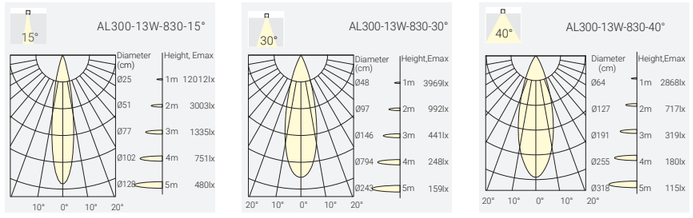

Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Length	Code
26W	30W	36V	700mA	80	2700K	15°	2800lm	2000lm	1200mm	FL1200(X)-2*AL300-30W-82715F-BB
						30°	2800lm	2000lm	1200mm	FL1200(X)-2*AL300-30W-82730F-BB
						40°	2800lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-82740F-BB
					3000K	15°	3000lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-83015F-BB
						30°	3000lm	2200lm	1200mm	FL1200(X)-2*AL300-30W-83030F-BB
						40°	3000lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-83040F-BB
					4000K	15°	3400lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-84015F-BB
						30°	3400lm	2400lm	1200mm	FL1200(X)-2*AL300-30W-84030F-BB
						40°	3400lm	2600lm	1200mm	FL1200(X)-2*AL300-30W-84040F-BB
26W	30W	36V	700mA	80	2700K	15°	2800lm	2000lm	1500mm	FL1500(X)-2*AL300-30W-82715F-BB
						30°	2800lm	2000lm	1500mm	FL1500(X)-2*AL300-30W-82730F-BB
						40°	2800lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-82740F-BB
					3000K	15°	3000lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-83015F-BB
						30°	3000lm	2200lm	1500mm	FL1500(X)-2*AL300-30W-83030F-BB
						40°	3000lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-83040F-BB
					4000K	15°	3400lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-84015F-BB
						30°	3400lm	2400lm	1500mm	FL1500(X)-2*AL300-30W-84030F-BB
						40°	3400lm	2600lm	1500mm	FL1500(X)-2*AL300-30W-84040F-BB

Code Remark: (X)=P(Pendant) (X)=S(Surface mounted) (X)=T(Trimless Recessed) (X)=F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

FUSION Linear System – Linear General Light & Accent Light Profile System



105° 15° 105° 30° 105° 40° | 2700K 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP20 | CE | CB | SAMSUNG 50,000h@L90B10 | OSRAM 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Linear General Light & Accent Light Profile System
- SAMSUNG LED, OSRAM LED: 37W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°+105°, 30°+105°, 40°+105°
- Lumen Output: Up to 3300lm-4000lm System Luminous Flux
- Mounting Type: Pendant, Surface mounted, Trimless Recessed, Trim Recessed
- LED Driver: ON-OFF, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

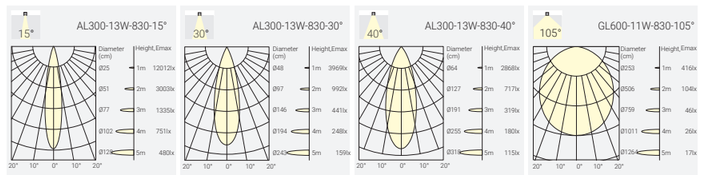

Order Info (in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
37W	41W	47V	700mA	80	2700K	15°+105°	4500lm	3300lm	FL1200(X)-2*AL300+GL600-41W-82715F-BB
						30°+105°	4500lm	3300lm	FL1200(X)-2*AL300+GL600-41W-82730F-BB
						40°+105°	4500lm	3500lm	FL1200(X)-2*AL300+GL600-41W-82740F-BB
					3000K	15°+105°	4700lm	3500lm	FL1200(X)-2*AL300+GL600-41W-83015F-BB
						30°+105°	4700lm	3500lm	FL1200(X)-2*AL300+GL600-41W-83030F-BB
						40°+105°	4700lm	3700lm	FL1200(X)-2*AL300+GL600-41W-83040F-BB
					4000K	15°+105°	5100lm	3800lm	FL1200(X)-2*AL300+GL600-41W-84015F-BB
						30°+105°	5100lm	3800lm	FL1200(X)-2*AL300+GL600-41W-84030F-BB
						40°+105°	5100lm	4000lm	FL1200(X)-2*AL300+GL600-41W-84040F-BB

Code Remark: (X)=P(Pendant) (X)=S(Surface mounted) (X)=T(Trimless Recessed) (X)=F(Trim Recessed)

Code Remark: F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

SPACE 60 EVO


Opal diffuser, high efficiency
60mm profile, 75mm with trim
Microprismatic optic, UGR ⩽19
Extension modules in 70mm increments



The SPACE 60 EVO series is a versatile linear lighting system designed for modern offices and public spaces. The profile features a precisely engineered 60mm width to ensure strict glare control (UGR<19) and uniform illumination. Available profile lengths include 1196mm, 1476mm, and 1826mm (lengths include 3mm end cap kits on each side), which can be used individually or connected in continuous runs to accommodate different spatial requirements. Combined with L-corner, T-corner, cross-corner, and arc-corner modules, SPACE 60 EVO offers enhanced flexibility for seamless integration into any project.


Pendant and Surface-Mounted Profile Options

Standard Lengths:

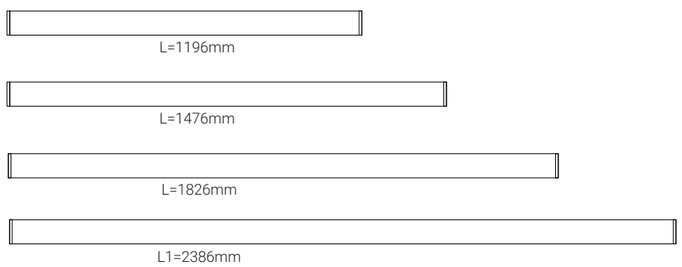




Customized Lengths Available:
Endcap Kit=2X3mm

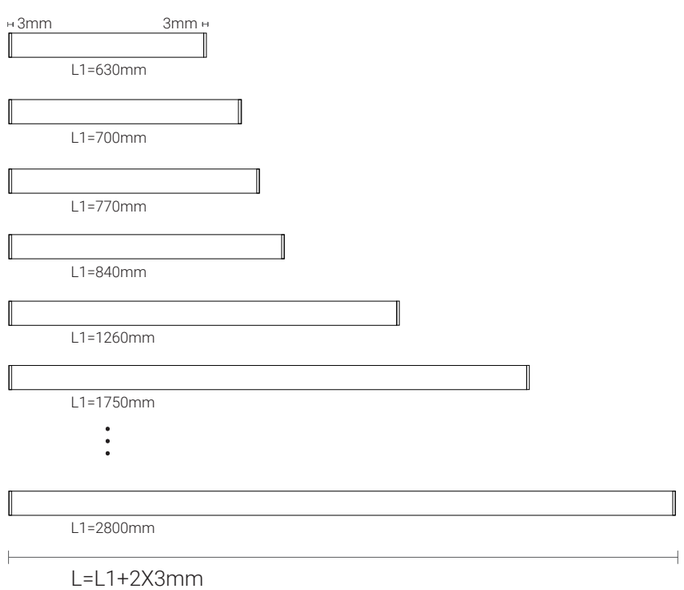


L=L1+2X3mm


Module Lengths:



Mountings:



Corner Modules:

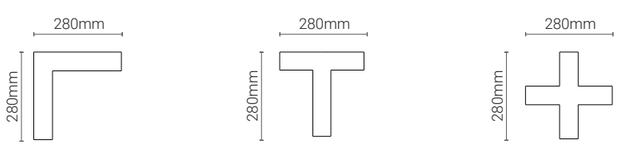


Trim Recessed Profile Options


New



Standard Lengths:

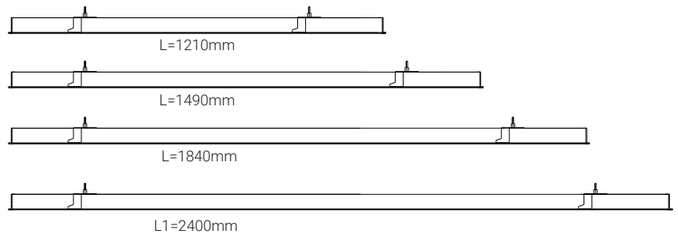


Customized Lengths Available Trim Recessed:
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5mm)=2X10mm

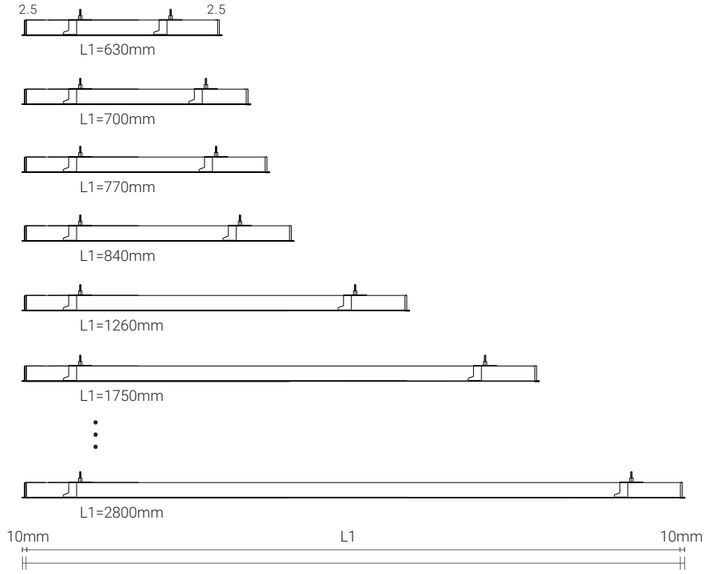


L=L1(profile length) + 2x10mm

Module Lengths:




Mountings:




Cut-out length=L-10mm
Cut-out width=60mm+5mm =65mm

Corner Modules:

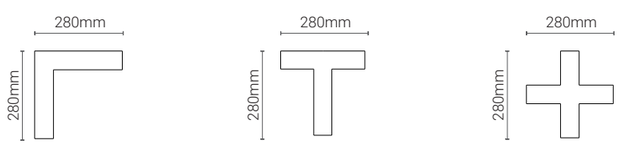

SPACE 60 EVO – Linear System

New

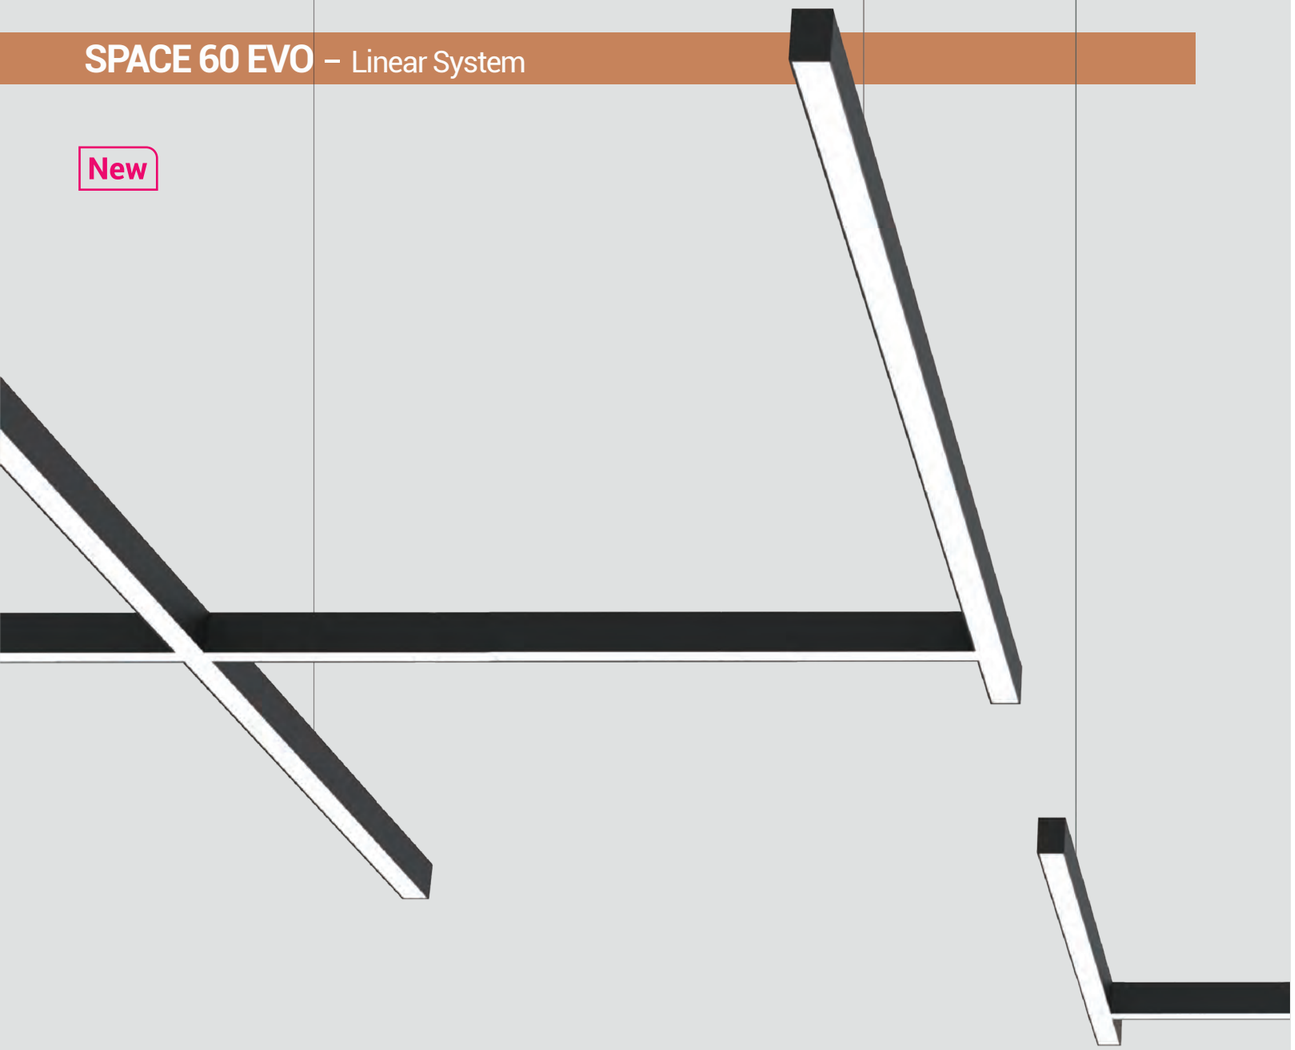


SPACE 60 EVO standard version features a microprismatic cover that enhances visual comfort (UGR<19) while providing homogeneous lighting. An opal cover version is also available as an option, offering uniform illumination and a wider beam angle (UGR<25).

Besides its elegant appearance, the detail-oriented design makes it a preferred choice among designers, electricians, and end users. All profile connection joints and end caps (with NO visible screws) are designed with anti-leakage measures to ensure optimal and clean light performance. Each profile is equipped with quick-connectors for fast and easy installation and maintenance.

Mounting options include pendant direct, pendant direct & indirect,surface-mounted, and trim-recessed installations. The LED driver—available in ON-OFF or DALI dimming versions—is integrated into the aluminium channel. Other dimming driver options are also available upon request.

Its elegant appearance and precision design make SPACE 60 EVO an ideal
profile system for office lighting or any profile-based general lighting application.


Quick Connector for Fast Installation

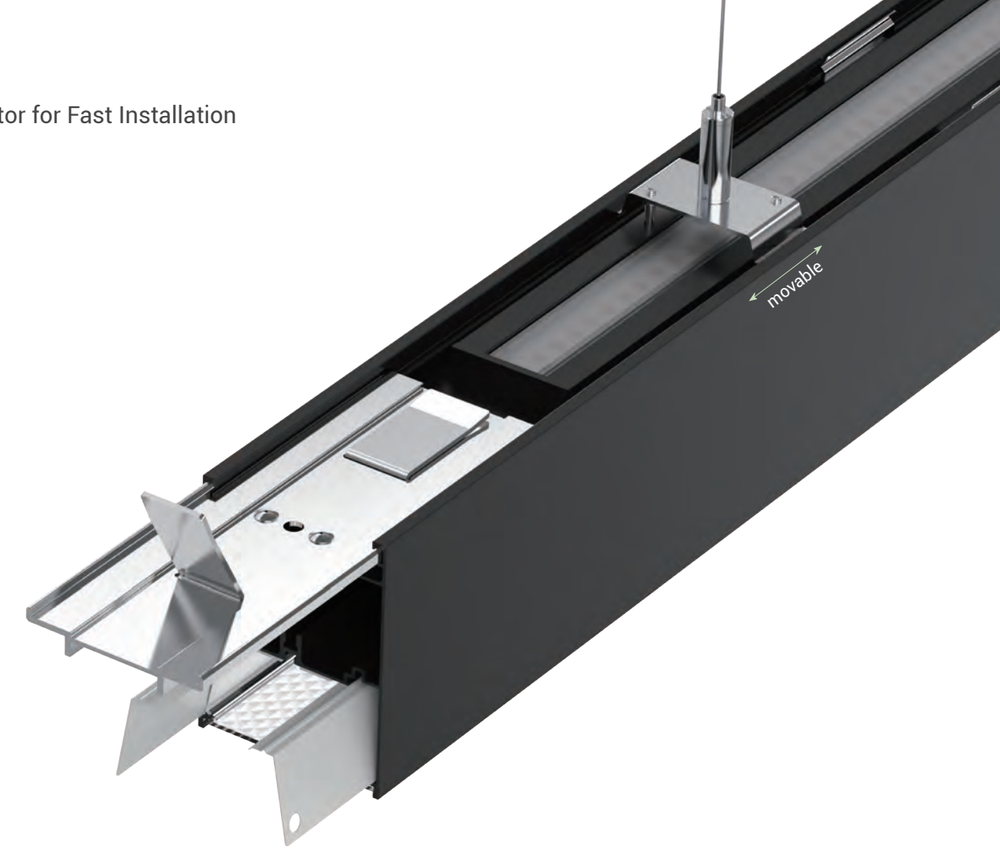


Product Features:



Seamless joints with no light leakage

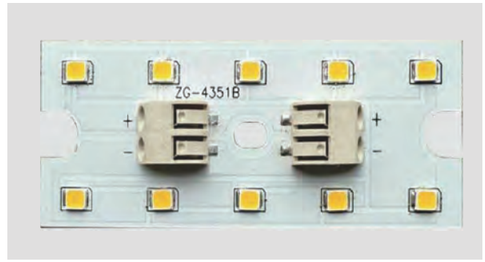


Custom lengths available in 70mm increments

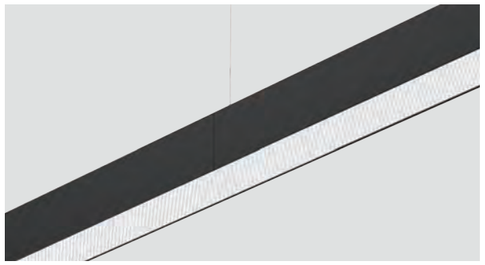

Microprismatic diffuser for visual comfort (UGR<19)

Pendant & Surface Mounted

New

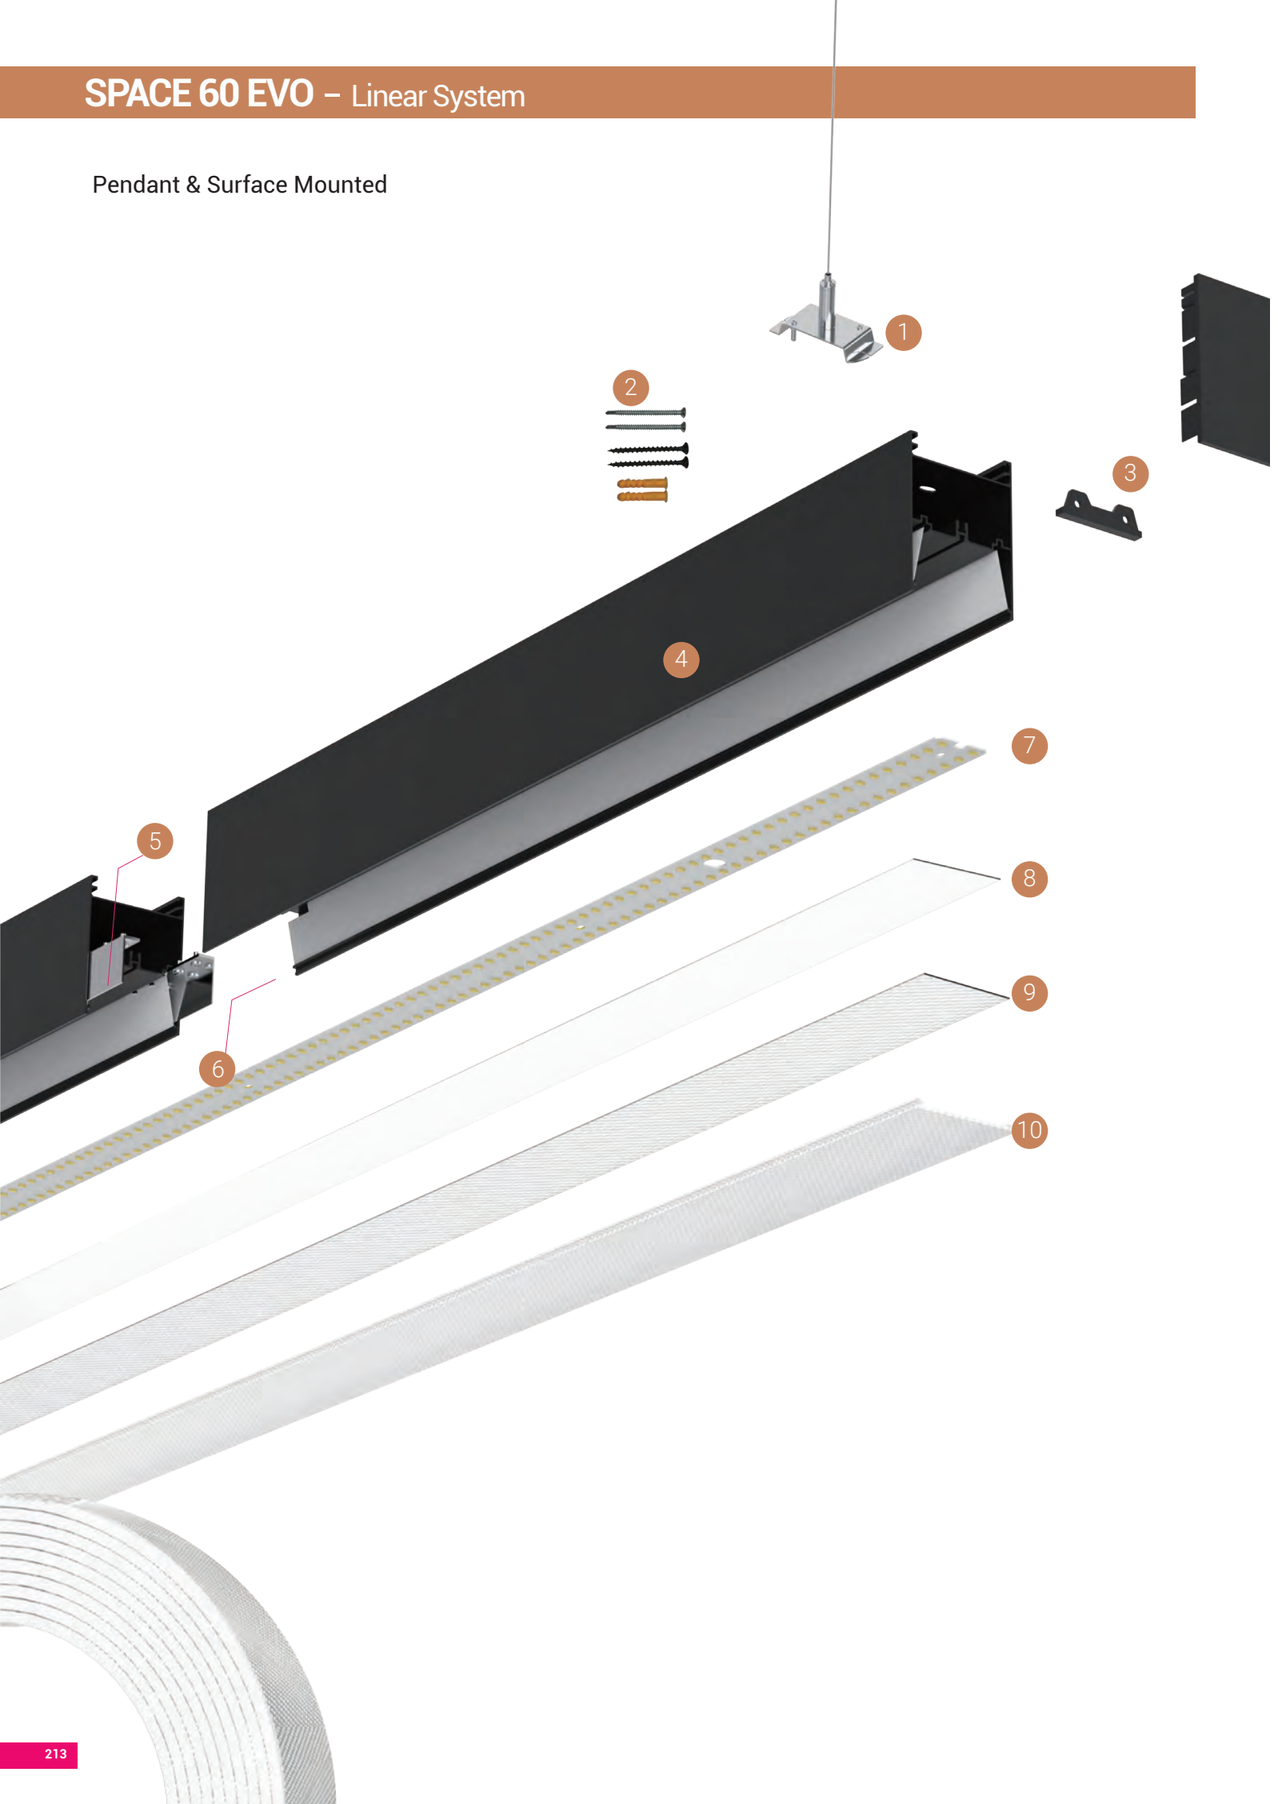


Construction

1. Pendant Installation Steel Wire Kit
2. Surface Mounted Installation Brackets
3. End Cap Set (no light leakage, no visible screw)
4. Profile Channel
5. Linear Connector
6. Light Leakage Prevention Cover
7. LED Module
8. Opal Diffuser Film
9. Microprismatic Film
10. Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
    30 meters per run, in-field cuttable

Trim Recessed

New

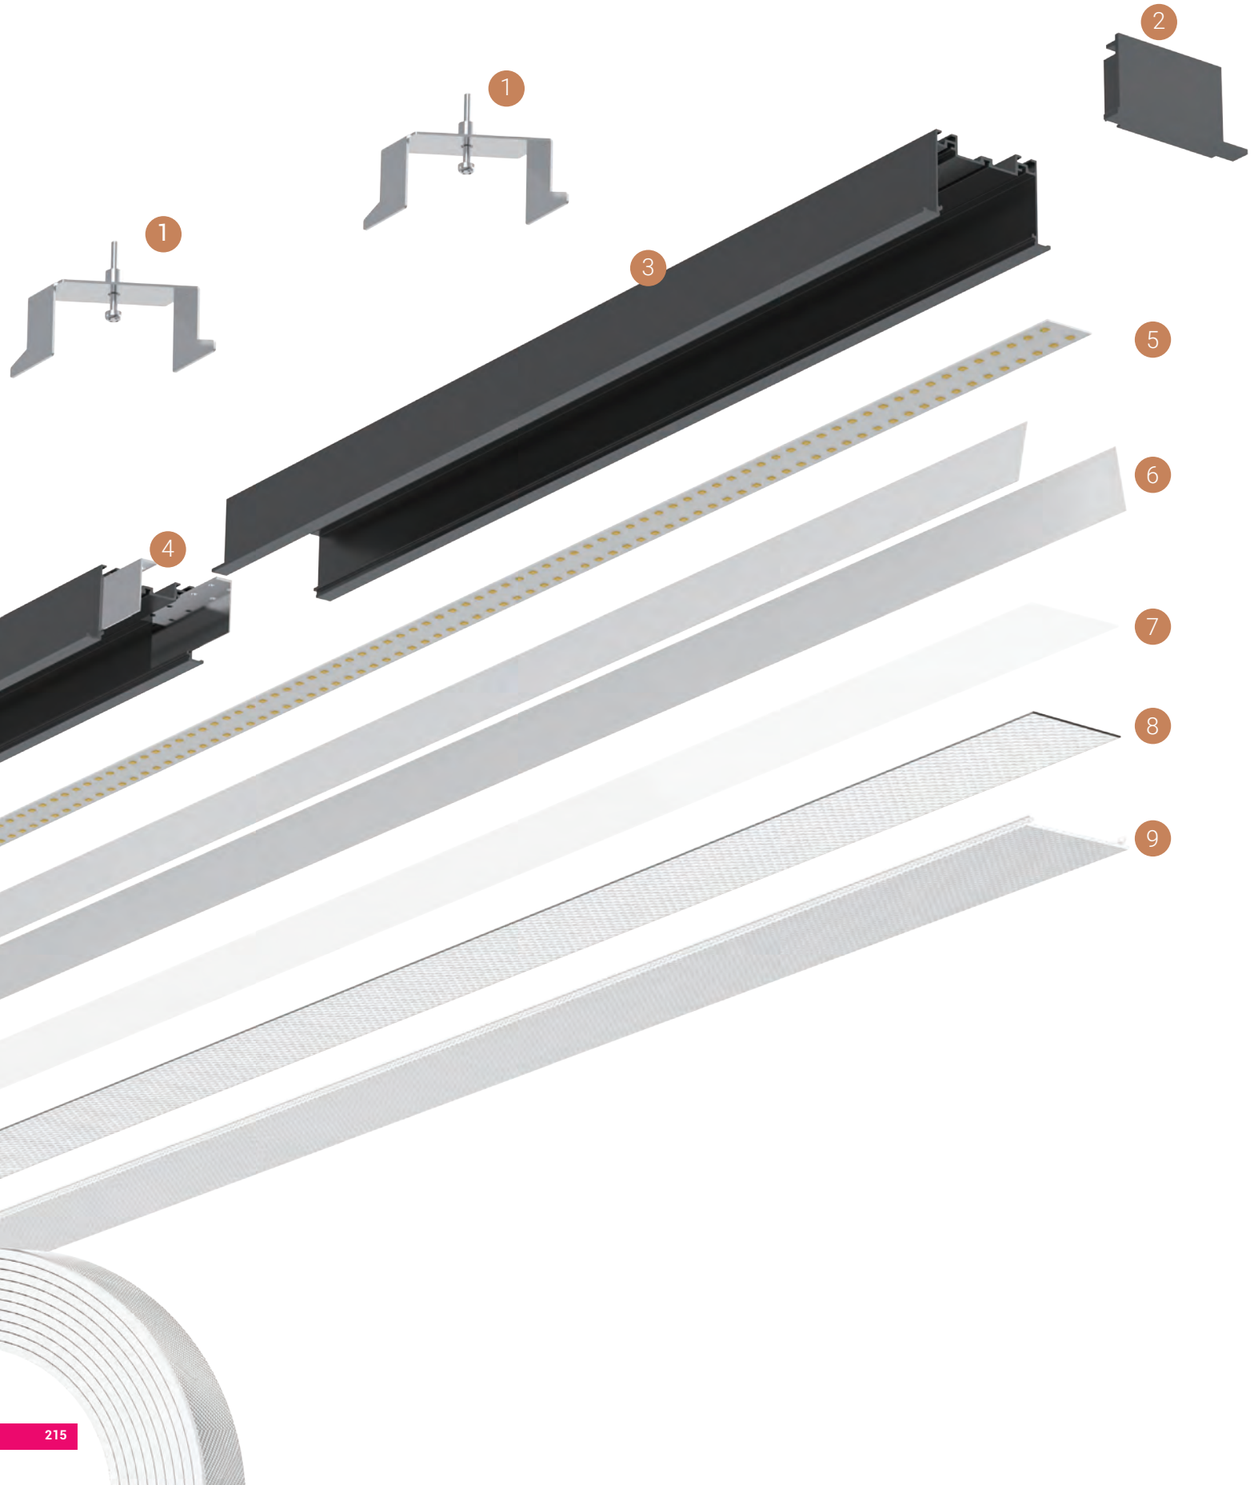

Construction

1. Trim Recessed Mounting Kit
2. End Cap with Trim
3. Profile Channel with Trim
4. Linear Connector
5. LED Module
6. Light Reflection Film
7. Opal Diffuser Film
8. Microprismatic Film
9. Flexible Microprismatic Cover (UGR<19)/ Flexible Opal Diffuser
   30 meters per run, in-field cuttable

Project: Application reference

New



SPACE 60 EVO – Pendant Direct & Indirect Linear System


New



105° / 80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 16W, 39W, 47W, 58W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 105° ↑
- Lumen Output: Up to 7000lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

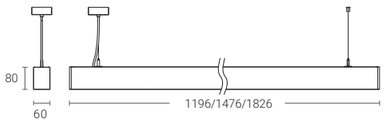

Light Distribution

3000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
14W	16W	28V	500mA	560mm	White	80	4000K	80° ↓ 105° ↑	1100lm ↓ 850lm ↑	SV60CL056M-8408016F-WN-U
34W	39W	28V	1200mA	1196mm	White	80	4000K	80° ↓ 105° ↑	3000lm ↓ 1700lm ↑	SV60CL119P-8408039F-WN-U
42W	47W	28V	1550mA	1476mm	White	80	4000K	80° ↓ 105° ↑	3650lm ↓ 2000lm ↑	SV60CL147P-8408047F-WN-U
52W	58W	28V	1850mA	1826mm	White	80	4000K	80° ↓ 105° ↑	4400lm ↓ 2600lm ↑	SV60CL182P-8408058F-WN-U

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CL056M Pendant 560mm	**830** CRI80/ 3000K	**80** 80° ↓	**16** 16W	**F** On-Off	**W** White	**N** None	**U** Uplight
SV60CL119P Pendant 1196mm	**840** CRI80/ 4000K	**80** 80° ↓ 105° ↑	**39** 39W	**A** 0-10V Dim	**B** Black		
SV60CL147P Pendant 1476mm	**930** CRI90/ 3000K		**47** 47W	**D** DALI Dim			
SV60CL182P Pendant 1826mm	**940** CRI90/ 4000K		**58** 58W				

Module Lengths:

560mm

Customized Lengths Available:

Endcap Kit=2X3mm

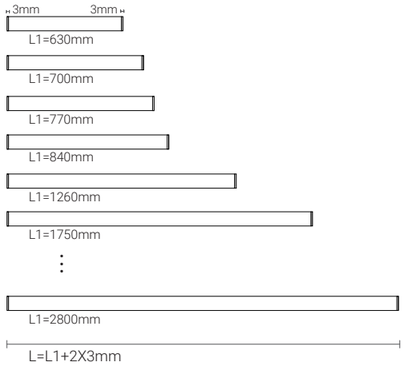

Customized Output:

Direct Lighting: 22W/m @840, 110 lm/W

Direct & Indirect Lighting: 33W/m @840, 120 lm/W



Project: Application reference

SPACE 60 EVO – Pendant Direct Linear System

New




80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct
- Lumileds LED: 13W, 27W, 33W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim



Light Distribution

3000K





Module Lengths:


70mm

280mm

560mm

Customized Lengths Available:

Endcap Kit=2X3mm

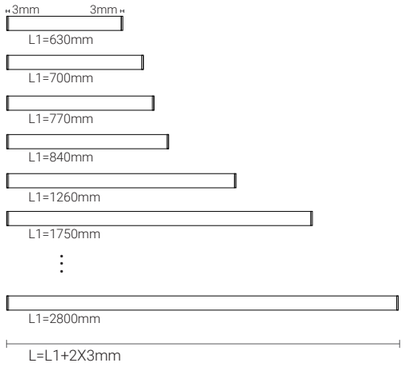

Customized Output:

Direct & Indirect Lighting: 33W/m @840, 120 lm/W

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	28V	400mA	560mm	White	80	4000K	80° ↓	1450lm ↓	SV60CL056M-8408013F-WN
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm ↓	SV60CL119P-8408027F-WN
29W	33W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3650lm ↓	SV60CL147P-8408033F-WN
36W	40W	28V	1300mA	1826mm	White	80	4000K	80° ↓	4400lm ↓	SV60CL182P-8408040F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CL056M Pendant 560mm	**830** CRI80/ 3000K	**80** 80° ↓	**13** 13W	**F** On-Off	**W** White	**N** None	
SV60CL119P Pendant 1196mm	**840** CRI80/ 4000K		**27** 27W	**A** 0-10V Dim	**B** Black		
SV60CL147P Pendant 1476mm	**930** CRI90/ 3000K		**33** 33W	**D** DALI Dim			
SV60CL182P Pendant 1826mm	**940** CRI90/ 4000K		**40** 40W				

SPACE 60 EVO – Surface Mounted Linear System

New




80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Surface Mounted
- Lumileds LED: 13W, 27W, 33W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim



Light Distribution

3000K





Module Lengths:


70mm

280mm

560mm

Customized Lengths Available:

Endcap Kit=2X3mm

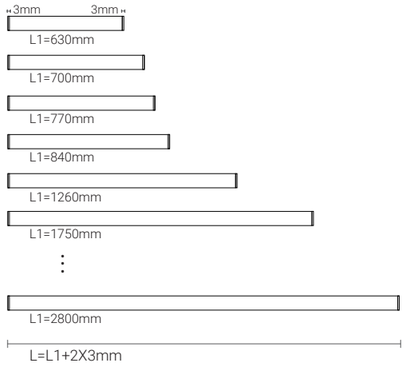

Customized Output:

Direct & Indirect Lighting: 33W/m @840, 120 lm/W

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	28V	400mA	560mm	White	80	4000K	80° ↓	1450lm ↓	SV60CL056M-8408013F-WN
24W	27W	28V	850mA	1196mm	White	80	4000K	80° ↓	3000lm ↓	SV60CL119C-8408027F-WN
29W	33W	28V	1050mA	1476mm	White	80	4000K	80° ↓	3650lm ↓	SV60CL147C-8408033F-WN
36W	40W	28V	1300mA	1826mm	White	80	4000K	80° ↓	4400lm ↓	SV60CL182C-8408040F-WN


Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CL056M 560mm Module	**830** CRI80/ 3000K	**80** 80° ↓	**13** 13W	**F** On-Off	**W** White	**N** None	
SV60CL119P Surface Mounted 1196mm	**840** CRI80/ 4000K		**27** 27W	**A** 0-10V Dim	**B** Black		
SV60CL147P Surface Mounted 1476mm	**930** CRI90/ 3000K		**33** 33W	**D** DALI Dim			
SV60CL182P Surface Mounted 1826mm	**940** CRI90/ 4000K		**40** 40W				


SPACE 60 EVO – Trim Recessed Linear System

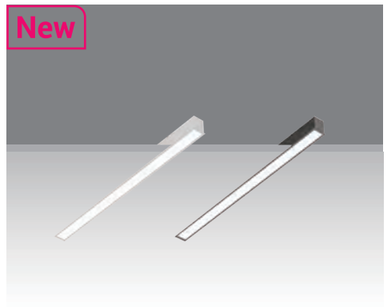

80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- General Lighting,Trim Recessed
- Lumileds LED: 13W, 27W, 33W, 40W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4400lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim




Module Lengths for Trim Recessed:

70mm

280mm

560mm

Customized Lengths Available Trim Recessed:
Endcap Kit thickness(2x2.5mm)+flange width(2x7.5mm)=2x10mm

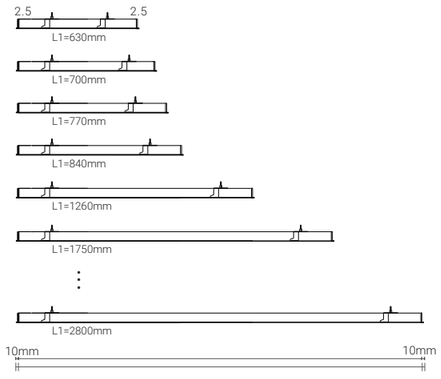


L=L1(profile length)+ 2x10mm

Cut-out length=L-10mm
Cut-out width=60mm+5mm =65mm

Customized Output:
Direct Lighting: 22W/m @840, 110 lm/W

Light Distribution

3000K

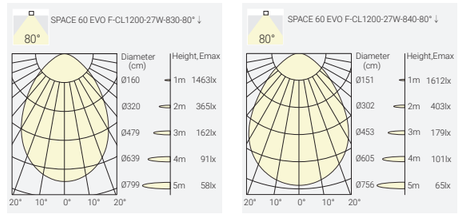

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
11W	13W	28V	400mA	560mm	White	80	4000K	80°↓	1450lm↓	SV60CL056M-8408013F-WN
24W	27W	28V	850mA	1210mm	White	80	4000K	80°↓	3000lm↓	SV60CL119F-8408027F-WN
29W	33W	28V	1050mA	1490mm	White	80	4000K	80°↓	3650lm↓	SV60CL147F-8408033F-WN
36W	40W	28V	1300mA	1840mm	White	80	4000K	80°↓	4400lm↓	SV60CL182F-8408040F-WN


Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CL056M 560mm Module Trim Recessed	**830** CRI80/ 3000K	**80** 80° ↓	**13** 13W	**F** On-Off	**W** White	**N** None	
SV60CL119P Trim Recessed 1210mm	**840** CRI80/ 4000K		**27** 27W	**A** 0-10V Dim	**B** Black		
SV60CL147P Trim Recessed 1490mm	**930** CRI90/ 3000K		**33** 33W	**D** DALI Dim			
SV60CL182P Trim Recessed 1840mm	**940** CRI90/ 4000K		**40** 40W				

SPACE 60 EVO – Corner Modules for Trim Recessed Linear System

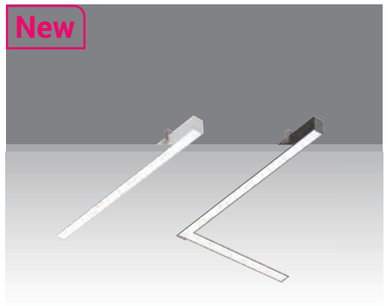


80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- General Light Version also Available
- Lumileds LED: 12W
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 1350lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim




Corner Modules:

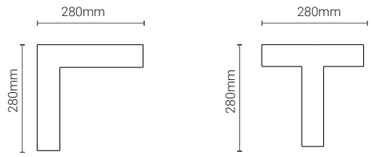

Light Distribution

3000K

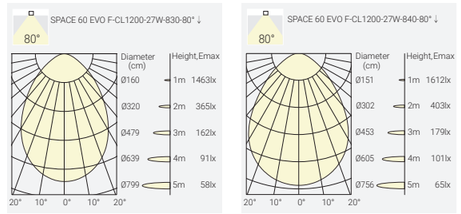

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280*280mm	White	80	4000K	80°↓	1350lm	SV60CLLC1F-8408012F-WN
10W	12W	28V	350mA	280*280mm	White	80	4000K	80°↓	1350lm	SV60CLTC1F-8408012F-WN
10W	12W	28V	350mA	280*280mm	White	80	4000K	80°↓	1350lm	SV60CLXC1F-8408012F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding


SV60 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLLC1F SV60LC1F L Corner	**830** CRI80/ 3000K	**80** 80° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SV60CLTC1F SV60TC1F T Corner	**840** CRI80/ 4000K			**A** 0-10V Dim	**B** Black		
SV60CLXC1F SV60XC1F + Corner	**930** CRI90/ 3000K			**D** DALI Dim			
	940 CRI90/ 4000K						

	SV60-LFK	Trim Recessed Linear Connector Kit
	SV60-FRK	Trim Recessed Mounting kit
	SV60 -EFK	SPACE EVO Trim Recessed Endcap Kit White/ Black Two unit for two sides
	SV60 -FMPC-30M	Flexible Microprismatic Cover, in 30 Meters per Roll With an anti-glare film and a diffusion film in 30 Meters per Roll
	SV60 -FOPC-30M	Flexible Opal Cover, in 30 Meters per Roll

SPACE 60 EVO – Corner Modules for Pendant & Surface Mounted Linear System

New

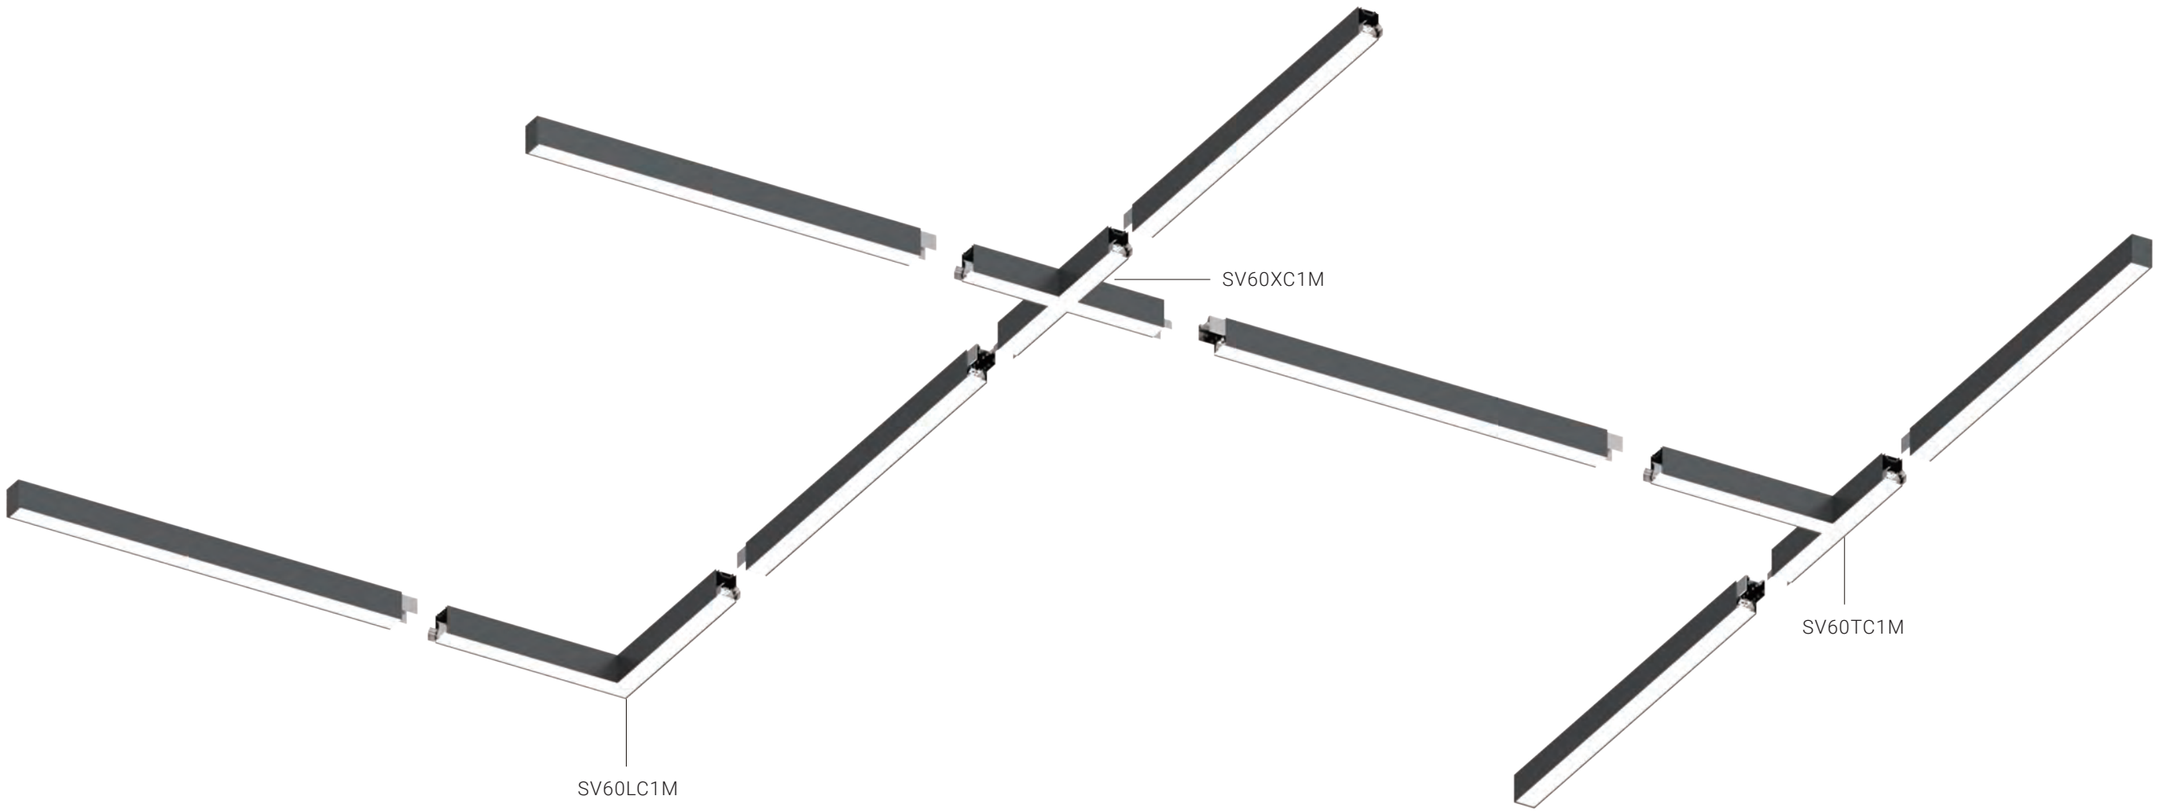

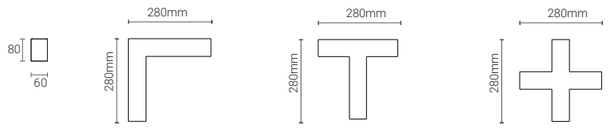

SV60LC1M
L Corner

SV60TC1M
T Corner

SV60XC1M
+Corner

	SV60-PK	Pendant Installation Kit (with Ceiling Box)
	SV60-PWK	Pendant Steel Wire Kit (no Ceiling Box)
	SV60-SMK	Surface Mounted Kit
	SV60 -LCK	Linear Connector Kit
	SV60-ECK	SPACE 60 EVO Surface Mounted&Pendant Endcap Kit White/ Black Two unit for two sides
	SV60-FCK	2.5-meter three-core input wire&Quick-connect for ON/OFF
	SV60-DCK	2.5-meter five-core input wire&Quick-connect for Dimming control
	SV60 -FMPC-30M	Flexible Microprismatic Cover, in 30 Meters per Roll With an anti-glare film and a diffusion film in 30 Meters per Roll
	SV60 -FOPC-30M	Flexible Opal Cover, in 30 Meters per Roll

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLLC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLTC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLXC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1350lm	SV60CLRC1M-8408012F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLLC1M SV60LC1M L Corner 280*280mm	**830** CRI80/ 3000K	**80** 80° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SV60CLTC1M SV60TC1M T Corner 280*280mm	**840** CRI80/ 4000K			**A** 0-10V Dim	**B** Black		
SV60CLXC1M SV60XC1M + Corner 280*280mm	**930** CRI90/ 3000K			**D** DALI Dim			
SV60CLRC1M SV60RC1M Arc-corner 280*280mm	**940** CRI90/ 4000K						

New

Modules & Installation Kits for Pendant & Surface-Mounted Linear System

Non-standard Lengths



SV60
Line
560~2800mm



SV60
Line Uplight
560~2800mm



SV60-C
Line
560~2800mm



SV60-C
Line Uplight
560~2800mm

L / T / X /Arc Corners



SV60LC1M
L Corner
280*280mm




SV60TC1M
T Corner
280*280mm




SV60XC1M
+ Corner
280*280mm


Installation Kits



SV60-ECK
End Caps
W60 H80mm



SV60-LCK
Connector



SV60-HCK
Quick Connector
for Suspension



SV60-PK2
SV60-PWK(no Ceiling Box)
Suspension Mounting
2m

Installation Kits




SV60-SMK
Surface Mounting




SV60-FCK(ON/OF)
SV60-DCK(DALI)
2.5mm



SV60-FOPC
Opal Cover
Roll 30m



SV60-FMPC
Microprismatic Cover
Roll 30m

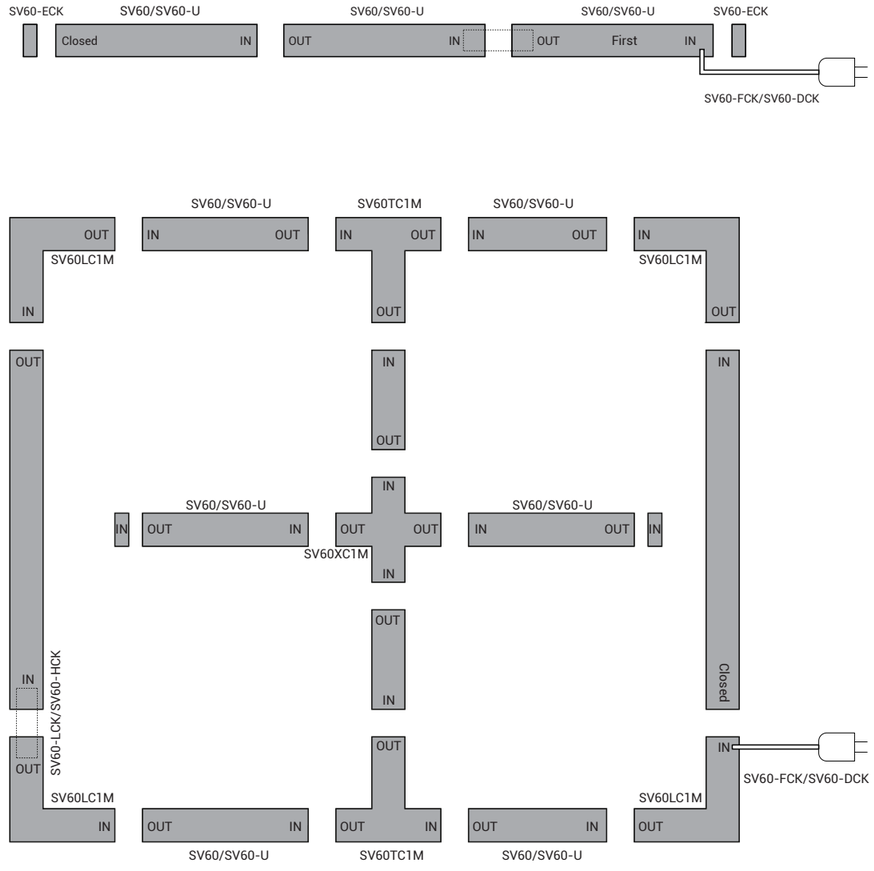

New

Modules & Installation Kits for Trim Recessed Linear System


Non-standard Lengths



SV60-F
Line
560~2800mm



SV60-F-C
Line
560~2800mm



SV60-LFK

L / T / X /Arc Corners



SV60LC1F
L Corner (90°)
280*280mm



SV60TC1F
T Corner
280*280mm



SV60XC1F
+ Corner
280*280mm

Installation Kits




SV60-FRK
Trim Recessed




SV60-EFK
End Caps
45*45mm




SV60-FOPC
Opal Cover
Roll 30m



SV60-FMPC
Microprismatic Cover
Roll 30m



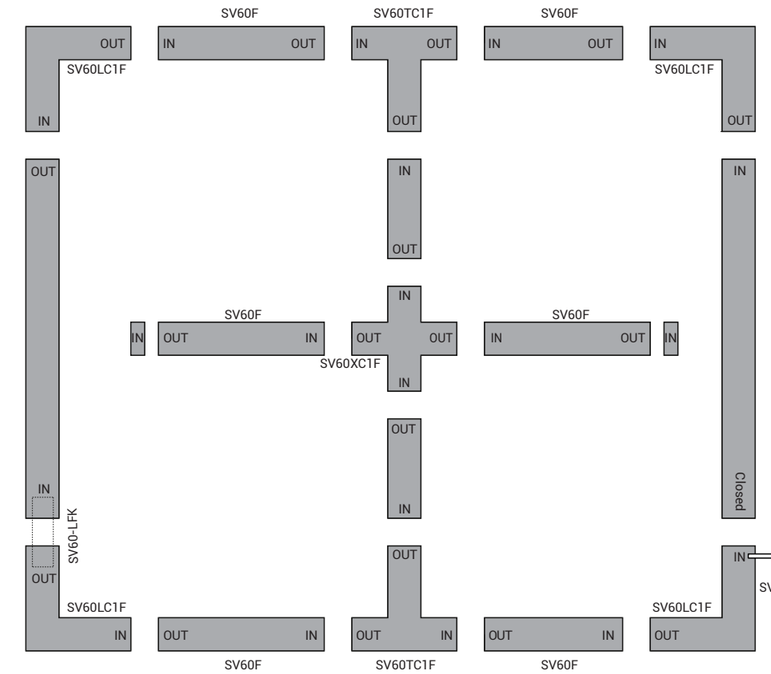

SPACE 60 EVO
Ring & Hexagon

Available in multiple sizes
Geometric forms with 60 mm profile
Distinctive shapes for architectural spaces
Opal diffuser & microprismatic optic, UGR ≤19



SPACE 60 EVO Ring – Pendant Direct & Indirect Linear System


New



110° 95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- LED: 38W, 52W, 77W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓ 110° ↑
- Lumen Output: Up to 11760lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
38W	42W	33V	1100mA	D660mm	White	80	4000K	95°↓ 110°↑	5880lm	SV60CLD066P-84095042F-WN-U
52W	57W	33V	1700mA	D960mm	White	80	4000K	95°↓ 110°↑	7980lm	SV60CLD096P-84095057F-WN-U
77W	84W	33V	2250mA	D1260mm	White	80	4000K	95°↓ 110°↑	11760lm	SV60CLD126P-84095084F-WN-U

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60CLD*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD066P Pendant D660mm	**830** CRI>80/ 3000K	**95** 95°↓	**042** 42W	**F** On-Off	**W** White	**N** None	**U** Uplight
SV60CLD096P Pendant D660mm	**840** CRI>80/ 4000K	**95** 95°↓ 110°↑	**057** 57W	**A** 0-10V Dim	**B** Black		
SV60CLD126P Pendant D1260mm			**084** 84W	**D** DALI Dim			

SPACE 60 EVO Ring – Pendant Direct Linear System


New



95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- LED: 25W, 35W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 7423lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D660mm	White	80	4000K	95°↓	3542lm	SV60CLD066P-84095028F-WN
35W	38W	33V	1050mA	D960mm	White	80	4000K	95°↓	5030lm	SV60CLD096P-84095038F-WN
52W	55W	33V	1500mA	D1260mm	White	80	4000K	95°↓	7423lm	SV60CLD126P-84095055F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60CLD*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLD066P Pendant D660mm	**830** CRI>80/ 3000K	**95** 95°↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SV60CLD096P Pendant D960mm	**840** CRI>80/ 4000K		**038** 38W	**A** 0-10V Dim	**B** Black		
SV60CLD126P Pendant D1260mm			**055** 55W	**D** DALI Dim			

SPACE 60 EVO Hexagon – Pendant Direct & Indirect Linear System

New

Project: Application reference



SPACE 60 EVO Hexagon – Pendant Direct & Indirect Linear System


New



105° 95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- LED: 50W ↓ 24W ↑ ; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓ 105° ↑
- Lumen Output: Up to 7150lm ↓ 4200lm ↑ System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

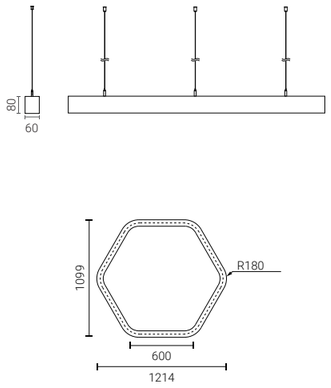

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W↓ 24W↑	55W↓ 27W↑	33V	2250mA	600mm	White	80	4000K	95°↓ 105°↑	7150lm ↓ 4200lm↑	SV60CLH060P-84095082F-WN-U

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60CLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLH060P Pendant 600mm	**830** CRI>80/ 3000K	**95** 95°↓ 105°↑	**082** 82W	**F** On-Off	**W** White	**N** None	**U** Uplight
	840 CRI>80/ 4000K			**A** 0-10V Dim	**B** Black		
				D DALI Dim			

SPACE 60 EVO Hexagon – Pendant Direct Linear System


New



95° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- LED: 50W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓
- Lumen Output: Up to 7150lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

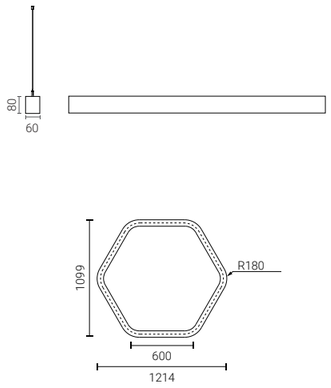

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	95°↓	7150lm	SV60CLH060P-84095055F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SV60CLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SV60CLH060P Pendant 600mm	**830** CRI>80/ 3000K	**95** 95°↓	**055** 55W	**F** On-Off	**W** White	**N** None	
	840 CRI>80/ 4000K			**A** 0-10V Dim	**B** Black		
				D DALI Dim			

SPACE 60 PRO

Designed for modern office environments
Custom lengths and modular configurations
Independent or continuous lighting solutions
Microprismatic optics with superior visual comfort



Project: Application reference


New

Linear Layout & Seamless Continuity

Straight modules combine seamlessly to create continuous light lines, supporting clean layouts and consistent illumination across the workspace.



Microprismatic Cover

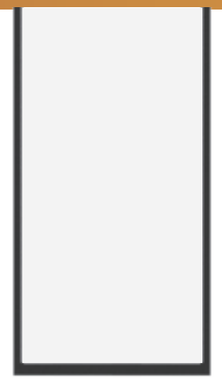


Opal Cover
**Optional*


- **Profile width:** 60mm, precisely engineered for sleek integration
- **Standard lengths:** 1198mm /1478mm /1828mm /2388mm (including 4mm end caps per side)
- **Mountings:** Pendant (direct /indirect)/ Pendant (direct)/ Surface mounted / Trim Recessed /Trimless Recessed
- **Connecting modules:** L-corner, T-corner, X-corner options
- **Tailored lengths configuration:** Tailored in **70** mm increments, length range **560-2800** mm.

Standard Lengths:

**Include endcaps*

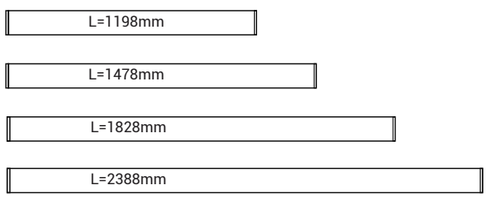

Mountings:

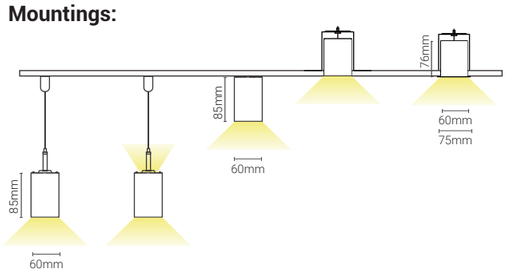

Tailored length:


70mm

Tailored increment unit in* **70mm



560 mm Min. ⟷ *2800 mm* Max.

Quick Connector
for Fast Installation

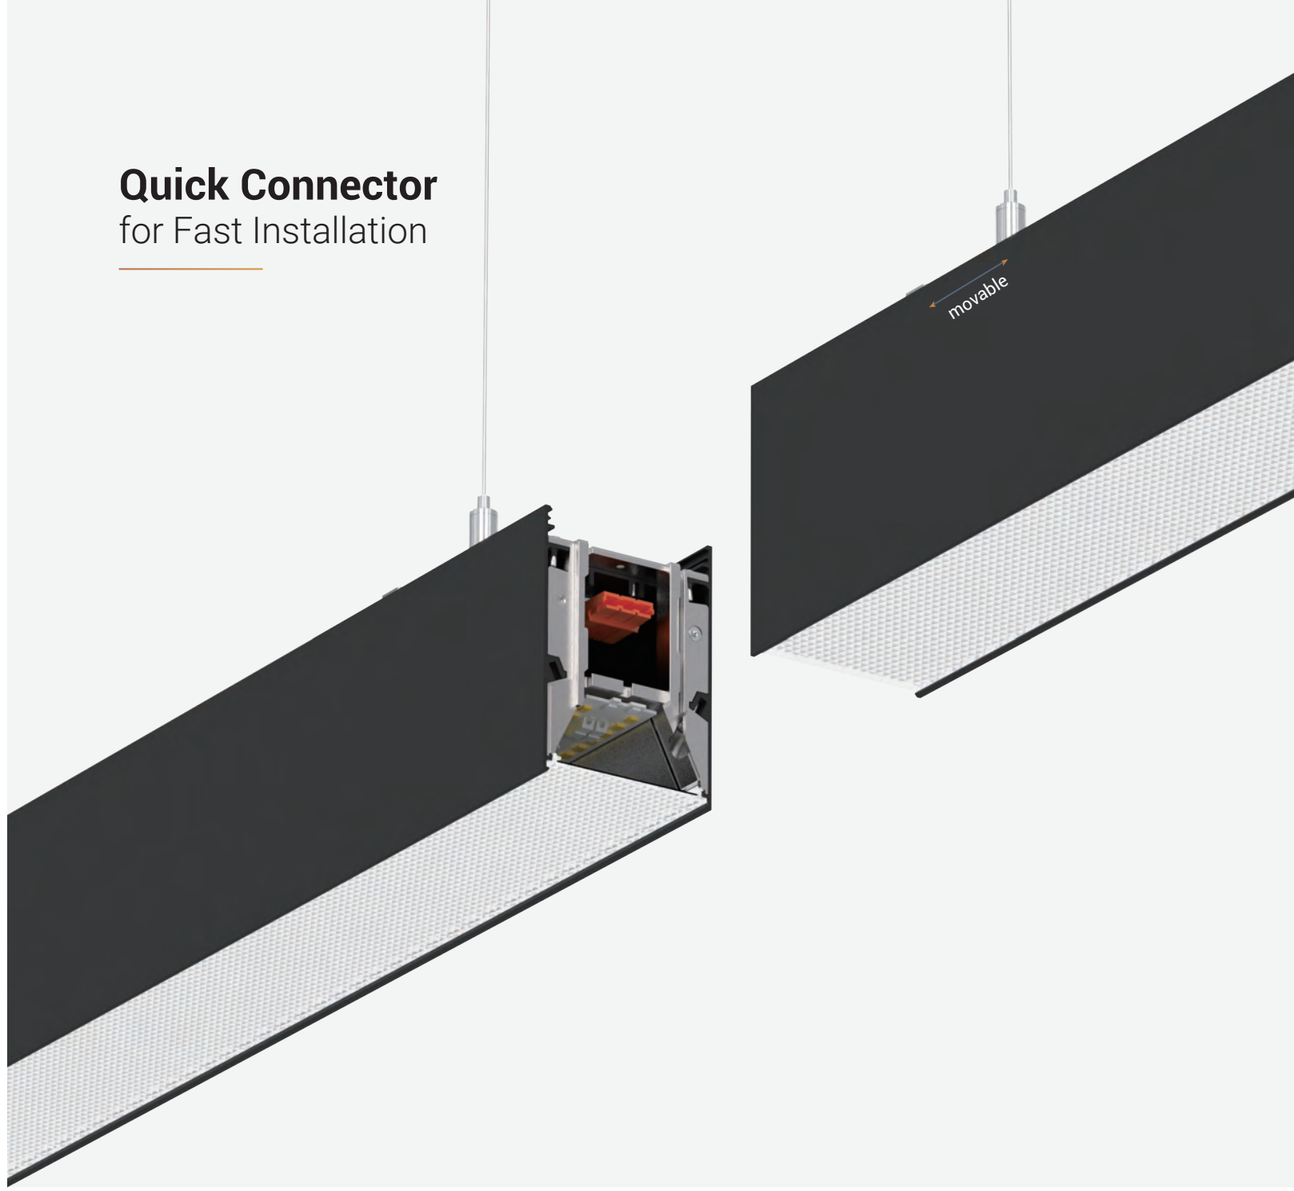

Product Features:



Seamless joints
with no light leakage



Customizable
shape modules



Custom lengths
available in
70mm increments



Microprismatic diffuser
for visual comfort
direct/indirect

SPACE 60 PRO – Pendant Direct & Indirect Linear System


New



120° 80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 120° ↑
- Lumen Output: Up to 4850lm ↓ 2450lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K




4000K



Customized Lengths Available:

Endcap Kit=2X4mm

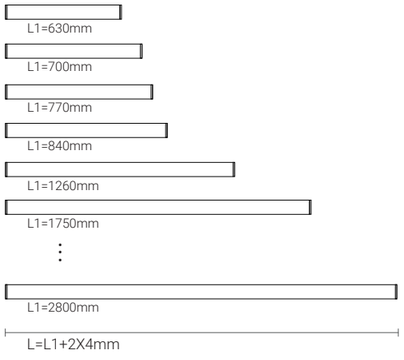

Customized Output:

Direct Lighting: 17W/m, 22W/m 140lm/W, @840

Direct & Indirect Lighting: 22W/m 140lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	80° ↓ 120° ↑	2550lm ↓ 1250lm ↑	SP60LGL119P-84080027F-WN-U
29W	33W	28V	1050mA	1478mm	White	80	4000K	80° ↓ 120° ↑	3100lm ↓ 1550lm ↑	SP60LGL147P-84080033F-WN-U
36W	40W	28V	1300mA	1828mm	White	80	4000K	80° ↓ 120° ↑	3750lm ↓ 1850lm ↑	SP60LGL182P-84080040F-WN-U
47W	52W	28V	1700mA	2388mm	White	80	4000K	80° ↓ 120° ↑	4850lm ↓ 2450lm ↑	SP60LGL238P-84080052F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60LGL119P Pendant 1198mm	**830** CRI80/ 3000K	**80** 80° ↓ 120° ↑	**27** 27W	**F** On-Off	**W** White	**N** None	**U** Uplight
SP60LGL147P Pendant 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP60LGL182P Pendant 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP60LGL238P Pendant 2388mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 60 PRO – Pendant Direct Linear System


New



80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 7300lm ↓ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K




4000K



Customized Lengths Available:

Endcap Kit=2X4mm

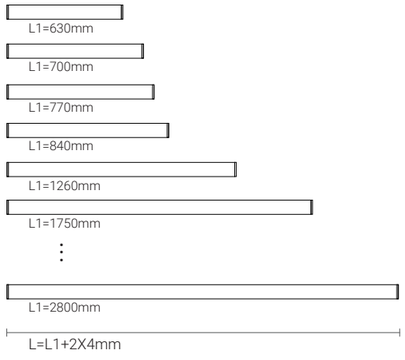

Customized Output:

Direct Lighting: 17W/m, 22W/m 140lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	80° ↓	3800lm ↓	SP60LGL119P-84080027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	80° ↓	4650lm ↓	SP60LGL147P-84080033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	80° ↓	5600lm ↓	SP60LGL182P-84080040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	80° ↓	7300lm ↓	SP60LGL238P-84080052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding


SP60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60LGL119P Pendant 1198mm	**830** CRI80/ 3000K	**80** 80° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP60LGL147P Pendant 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP60LGL182P Pendant 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP60LGL238P Pendant 2388mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 60 PRO – Surface Mounted Linear System


New





Customized Lengths Available:

Endcap Kit=2X4mm

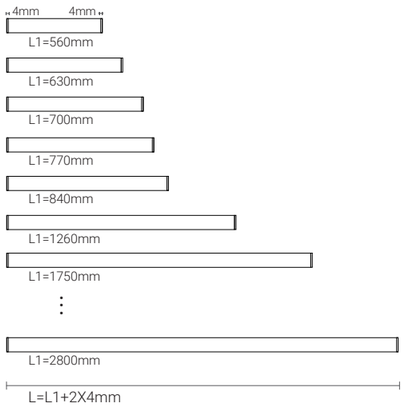

Customized Output:

Direct Lighting: 17W/m, 22W/m 140lm/W, @840


80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE

Quick Info


- General Lighting, Surface Mounted
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 7300lm ↓ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	80° ↓	3800lm ↓	SP60LGL119C-84080027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	80° ↓	4650lm ↓	SP60LGL147C-84080033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	80° ↓	5600lm ↓	SP60LGL182C-84080040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	80° ↓	7300lm ↓	SP60LGL238C-84080052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60LGL119C Surface 1198mm	**830** CRI80/ 3000K	**80** 80° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP60LGL147C Surface 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP60LGL182C Surface 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP60LGL238C Surface 2388mm	**940** CRI90/ 4000K		**52** 52W				

Project: Application reference

SPACE 60 PRO – Trimless Recessed Linear System


New



80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trimless Recessed Mounted
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 7300lm ↓ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K




4000K



Customized Lengths Available:

Endcap Kit=2X4mm

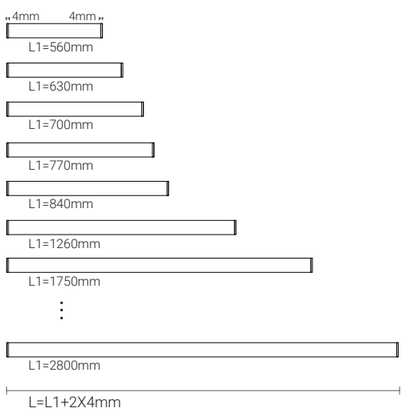

Customized Output:

Direct Lighting: 17W/m, 22W/m 140lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	80° ↓	3800lm ↓	SP60LGL119T-84080027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	80° ↓	4650lm ↓	SP60LGL147T-84080033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	80° ↓	5600lm ↓	SP60LGL182T-84080040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	80° ↓	7300lm ↓	SP60LGL238T-84080052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60LGL119T Trimless Recessed 1198mm	**830** CRI80/ 3000K	**80** 80° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP60LGL147T Trimless Recessed 1198mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP60LGL182T Trimless Recessed 1198mm	**930** CRI90/ 3000K		**40** 40W				
SP60LGL238T Trimless Recessed 1198mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 60 PRO – Trim Recessed Linear System


New



80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trim Recessed Mounted
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 7300lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K




4000K



Customized Lengths Available:

Endcap Kit=2X11.5mm

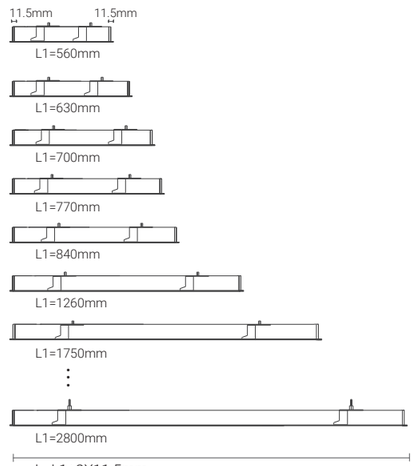

Customized Output:

Direct Lighting: 17W/m, 22W/m 140lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1213mm	White	80	4000K	80° ↓	3800lm ↓	SP60LGL121F-84080027F-WN
29W	33W	28V	1050mA	1493mm	White	80	4000K	80° ↓	4650lm ↓	SP60LGL149F-84080033F-WN
36W	40W	28V	1300mA	1843mm	White	80	4000K	80° ↓	5600lm ↓	SP60LGL184F-84080040F-WN
47W	52W	28V	1700mA	2403mm	White	80	4000K	80° ↓	7300lm ↓	SP60LGL240F-84080052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP60 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60LGL121F Trim Recessed 1213mm	**830** CRI80/ 3000K	**80** 80° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP60LGL149F Trim Recessed 1493mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP60LGL184F Trim Recessed 1843mm	**930** CRI90/ 3000K		**40** 40W				
SP60LGL240F Trim Recessed 2403mm	**940** CRI90/ 4000K		**52** 52W				

Project: Application reference

New



Curved Layout & Flexible Composition

Curved modules in multiple radii can be freely combined to create flowing layouts and customized lighting compositions.

SPACE 60 PRO Curve – Pendant Direct & Indirect linear system


New




120° 80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE

Quick Info


- General Lighting, Pendant Direct & Indirect
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 120° ↑
- Lumen Output: Up to 2900lm ↓ 1450lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



1/2 of a Circle




1/4 of a Circle




1/8 of a Circle

Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	750mA	1036mm	White	80	4000K	80° ↓ 120° ↑	2050lm ↓ 1050lm ↑	SP60CGLC06AP-84080022F-WN-U-CM
28W	31W	28V	1100mA	1507mm	White	80	4000K	80° ↓ 120° ↑	2900lm ↓ 1450lm ↑	SP60CGLC09AP-84080031F-WN-U-CM
10W	11W	28V	300mA	518mm	White	80	4000K	80° ↓ 120° ↑	1050lm ↓ 500lm ↑	SP60CGLC06BP-84080011F-WN-U-CM
14W	16W	28V	500mA	754mm	White	80	4000K	80° ↓ 120° ↑	1500lm ↓ 750lm ↑	SP60CGLC09BP-84080016F-WN-U-CM
20W	22W	28V	750mA	989mm	White	80	4000K	80° ↓ 120° ↑	2050lm ↓ 1050lm ↑	SP60CGLC12BP-84080022F-WN-U-CM
24W	27W	28V	900mA	1225mm	White	80	4000K	80° ↓ 120° ↑	2550lm ↓ 1250lm ↑	SP60CGLC15BP-84080027F-WN-U-CM
28W	31W	28V	1100mA	1460mm	White	80	4000K	80° ↓ 120° ↑	2900lm ↓ 1450lm ↑	SP60CGLC18BP-84080031F-WN-U-CM
20W	22W	28V	700mA	966mm	White	80	4000K	80° ↓ 120° ↑	2050lm ↓ 1050lm ↑	SP60CGLC24CP-84080022F-WN-U-CM
24W	27W	28V	900mA	1201mm	White	80	4000K	80° ↓ 120° ↑	2550lm ↓ 1250lm ↑	SP60CGLC30CP-84080027F-WN-U-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP60C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CGLC06AP Pendant D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**80** 80° ↓ 120° ↑	**11** 11W	**F** On-Off	**W** White	**N** None	**U** With Uplight, Extrusion Cover
SP60CGLC09AP Pendant D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP60CGLC06BP Pendant D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP60CGLC09BP Pendant D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP60CGLC12BP Pendant D1200mm 1/4 of a Circle			**31** 31W				
SP60CGLC15BP Pendant D1500mm 1/4 of a Circle							
SP60CGLC18BP Pendant D1800mm 1/4 of a Circle							
SP60CGLC24CP Pendant D2400mm 1/8 of a Circle							
SP60CGLC30CP Pendant D3000mm 1/8 of a Circle							

Project: Application reference

SPACE 60 PRO Curve – Pendant Direct linear system


New





80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE

Quick Info

- General Light, Version also Available
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4350lm ↓ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC06AP-84080022F-WN-CM
28W	31W	28V	1000mA	4350mm ↓	White	80	4000K	80° ↓	4350lm ↓	SP60CGLC09AP-84080031F-WN-CM
10W	11W	28V	350mA	1550mm ↓	White	80	4000K	80° ↓	1550lm ↓	SP60CGLC06BP-84080011F-WN-CM
14W	16W	28V	500mA	2250mm ↓	White	80	4000K	80° ↓	2250lm ↓	SP60CGLC09BP-84080016F-WN-CM
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC12BP-84080022F-WN-CM
24W	27W	28V	850mA	3800mm ↓	White	80	4000K	80° ↓	3800lm ↓	SP60CGLC15BP-84080027F-WN-CM
28W	31W	28V	1000mA	4350mm ↓	White	80	4000K	80° ↓	4350lm ↓	SP60CGLC18BP-84080031F-WN-CM
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC24CP-84080022F-WN-CM
24W	27W	28V	750mA	3800mm ↓	White	80	4000K	80° ↓	3800lm ↓	SP60CGLC30CP-84080027F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP60C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CGLC06AP Pendant D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**80** 80° ↓	**11** 11W	**F** On-Off	**W** White	**N** None	
SP60CGLC09AP Pendant D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP60CGLC06BP Pendant D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP60CGLC09BP Pendant D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP60CGLC12BP Pendant D1200mm 1/4 of a Circle			**31** 31W				
SP60CGLC15BP Pendant D1500mm 1/4 of a Circle							
SP60CGLC18BP Pendant D1800mm 1/4 of a Circle							
SP60CGLC24CP Pendant D2400mm 1/8 of a Circle							
SP60CGLC30CP Pendant D3000mm 1/8 of a Circle							

SPACE 60 PRO Curve – Surface Mounted Linear System


New





80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE

Quick Info

- General Light, Version also Available
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4350lm ↓ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC06AC-84080022F-WN-CM
28W	31W	28V	1000mA	4350mm ↓	White	80	4000K	80° ↓	4350lm ↓	SP60CGLC09AC-84080031F-WN-CM
10W	11W	28V	350mA	1550mm ↓	White	80	4000K	80° ↓	1550lm ↓	SP60CGLC06BC-84080011F-WN-CM
14W	16W	28V	500mA	2250mm ↓	White	80	4000K	80° ↓	2250lm ↓	SP60CGLC09BC-84080016F-WN-CM
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC12BC-84080022F-WN-CM
24W	27W	28V	850mA	3800mm ↓	White	80	4000K	80° ↓	3800lm ↓	SP60CGLC15BC-84080027F-WN-CM
28W	31W	28V	1000mA	4350mm ↓	White	80	4000K	80° ↓	4350lm ↓	SP60CGLC18BC-84080031F-WN-CM
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC24CC-84080022F-WN-CM
24W	27W	28V	750mA	3800mm ↓	White	80	4000K	80° ↓	3800lm ↓	SP60CGLC30CC-84080027F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP60C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CGLC06AC Surface D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**80** 80° ↓	**11** 11W	**F** On-Off	**W** White	**N** None	
SP60CGLC09AC Surface D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP60CGLC06BC Surface D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP60CGLC09BC Surface D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP60CGLC12BC Surface D1200mm 1/4 of a Circle			**31** 31W				
SP60CGLC15BC Surface D1500mm 1/4 of a Circle							
SP60CGLC18BC Surface D1800mm 1/4 of a Circle							
SP60CGLC24CC Surface D2400mm 1/8 of a Circle							
SP60CGLC30CC Surface D3000mm 1/8 of a Circle							

SPACE 60 PRO Curve – Trimless Recessed Linear System


New





80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Light, Trimless Recessed Mounted
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4350lm ↓ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC06AT-84080022F-WN-CM
28W	31W	28V	1000mA	4350mm ↓	White	80	4000K	80° ↓	4350lm ↓	SP60CGLC09AT-84080031F-WN-CM
10W	11W	28V	350mA	1550mm ↓	White	80	4000K	80° ↓	1550lm ↓	SP60CGLC06BT-84080011F-WN-CM
14W	16W	28V	500mA	2250mm ↓	White	80	4000K	80° ↓	2250lm ↓	SP60CGLC09BT-84080016F-WN-CM
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC12BT-84080022F-WN-CM
24W	27W	28V	850mA	3800mm ↓	White	80	4000K	80° ↓	3800lm ↓	SP60CGLC15BT-84080027F-WN-CM
28W	31W	28V	1000mA	4350mm ↓	White	80	4000K	80° ↓	4350lm ↓	SP60CGLC18BT-84080031F-WN-CM
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC24CT-84080022F-WN-CM
24W	27W	28V	750mA	3800mm ↓	White	80	4000K	80° ↓	3800lm ↓	SP60CGLC30CT-84080027F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


Coding

SP60C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CGLC06AT Trimless Recessed D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**80** 80° ↓	**11** 11W	**F** On-Off	**W** White	**N** None	
SP60CGLC09AT Trimless Recessed D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP60CGLC06BT Trimless Recessed D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP60CGLC09BT Trimless Recessed D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP60CGLC12BT Trimless Recessed D1200mm 1/4 of a Circle			**31** 31W				
SP60CGLC15BT Trimless Recessed D1500mm 1/4 of a Circle							
SP60CGLC18BT Trimless Recessed D1800mm 1/4 of a Circle							
SP60CGLC24CT Trimless Recessed D2400mm 1/8 of a Circle							
SP60CGLC30CT Trimless Recessed D3000mm 1/8 of a Circle							

SPACE 60 PRO Curve – Trim Recessed Linear System


New





80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Light, Trim Recessed Mounted
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 4350lm ↓ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC06AF-84080022F-WN-CM
28W	31W	28V	1000mA	4350mm ↓	White	80	4000K	80° ↓	4350lm ↓	SP60CGLC09AF-84080031F-WN-CM
10W	11W	28V	350mA	1550mm ↓	White	80	4000K	80° ↓	1550lm ↓	SP60CGLC06BF-84080011F-WN-CM
14W	16W	28V	500mA	2250mm ↓	White	80	4000K	80° ↓	2250lm ↓	SP60CGLC09BF-84080016F-WN-CM
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC12BF-84080022F-WN-CM
24W	27W	28V	850mA	3800mm ↓	White	80	4000K	80° ↓	3800lm ↓	SP60CGLC15BF-84080027F-WN-CM
28W	31W	28V	1000mA	4350mm ↓	White	80	4000K	80° ↓	4350lm ↓	SP60CGLC18BF-84080031F-WN-CM
20W	22W	28V	700mA	3100mm ↓	White	80	4000K	80° ↓	3100lm ↓	SP60CGLC24CF-84080022F-WN-CM
24W	27W	28V	750mA	3800mm ↓	White	80	4000K	80° ↓	3800lm ↓	SP60CGLC30CF-84080027F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


Coding

SP60C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CGLC06AF Trim Recessed D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**80** 80° ↓	**11** 11W	**F** On-Off	**W** White	**N** None	
SP60CGLC09AF Trim Recessed D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP60CGLC06BF Trim Recessed D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP60CGLC09BF Trim Recessed D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP60CGLC12BF Trim Recessed D1200mm 1/4 of a Circle			**31** 31W				
SP60CGLC15BF Trim Recessed D1500mm 1/4 of a Circle							
SP60CGLC18BF Trim Recessed D1800mm 1/4 of a Circle							
SP60CGLC24CF Trim Recessed D2400mm 1/8 of a Circle							
SP60CGLC30CF Trim Recessed D3000mm 1/8 of a Circle							

SPACE 60 PRO – Corner Modules Linear System




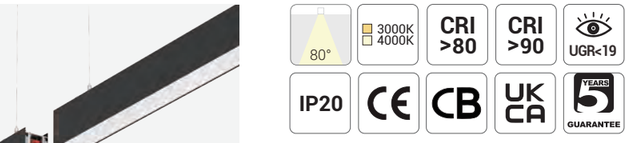


Quick Info

- General Lighting, Corner Modules for Pendant & Surface Mounted & Trimless Recessed Mounted Linear System
- System Power: 12W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 1700lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim






SP60LLC1M
L Corner



SP60LTC1M
T Corner




SP60LXC1M
X Corner


SP60LVC1M
V 135°Corner

Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1700lm	SP60LLC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1700lm	SP60LTC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1700lm	SP60LXC1M-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1700lm	SP60LLC2M-8408012F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


Coding

SP60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60LLC1M L Corner 280*280mm	**830** CRI80/ 3000K	**80** 80° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SP60LTC1M T Corner 280*280mm	**840** CRI80/ 4000K			**D** DALI Dim	**B** Black		
SP60LXC1M X Corner 280*280mm	**930** CRI90/ 3000K						
SP60LLC2M L corner(135°) 280*280mm	**940** CRI90/ 4000K						

Project: Application reference

SPACE 60 PRO – Corner Modules for Trim Recessed Linear System

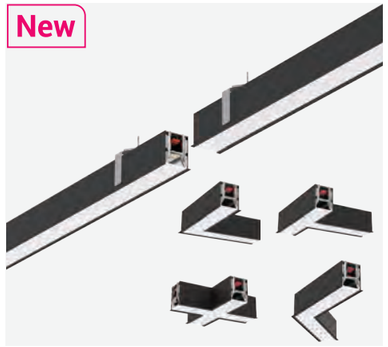


80° | 3000K 4000K | CRI >80 | CRI >90 | UGR<19 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Corner Modules for Trimless Recessed Mounted Linear System
- System Power: 12W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 1700lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim







SP60LLC1F
L Corner



SP60LTC1F
T Corner




SP60LXC1F
X Corner




SP60LVC1F
V 135°Corner

Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1700lm	SP60LLC1F-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1700lm	SP60LTC1F-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1700lm	SP60LXC1F-8408012F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	80°	1700lm	SP60LLC2F-8408012F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP60 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60LLC1F Trim Recessed L Corner 280*280mm	**830** CRI80/ 3000K	**80** 80° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SP60LTC1F Trim Recessed T Corner 280*280mm	**840** CRI80/ 4000K			**D** DALI Dim	**B** Black		
SP60LXC1F Trim Recessed X Corner 280*280mm	**930** CRI90/ 3000K						
SP60LLC2F Trim Recessed L corner(135°) 280*280mm	**940** CRI90/ 4000K						

New

Lengths



SP60L
Single
560~2800mm



SP60L-M/SP60L-CM
Lines
560~2800mm




SP60L-U-M/SP60L-U-CM
Line Uplight Moudles
560~2800mm




SP60L-F-C
Lines
560~2800mm


L / T / X / 1/4 Circle Corners




SP60LLC1M
L Corner
280*280mm



SP60LTC1M
T Corner
280*280mm



SP60LXC1M
X Corner
280*280mm




SP60LVC1M
V 135°Corner
280*280mm




SP60CC06B
1/4 Circle Corners
inner radius120/240

L / T / X Corners Trim Version




SP60LLC1F
L Corner
280*280mm
For Trim Recessed Mounted




SP60LTC1F
T Corner
280*280mm
For Trim Recessed Mounted



SP60LXC1F
X Corner
280*280mm
For Trim Recessed Mounted



SP60LVC1F
V 135°Corner
280*280mm



SP60-ECK
End Caps
W75 H76mm
For Trim Recessed Mounted

Installation Kits



SP60-ECK
End Caps
W45 H85mm
For Pendant & Surface Mounted
& Trimless Recessed Mounted



SP60-TRK
For Trimless Recessed Mounted



SP60-FRK
For Trim Recessed Mounted




SP60-PK2
SP60-PWK(no Ceiling Box)
Suspension Mounting
2m
For Pendant

Installation Kits




SP60-SMK
Surface Mounting
For Surface Mounted




SP60-FCK(ON/OF)
SP60-DCK(DALI)
2.5mm




SP60-FOPC
Opal Cover
Roll 30m



SP60-FMPC
Microprismatic Cover
Roll 30m

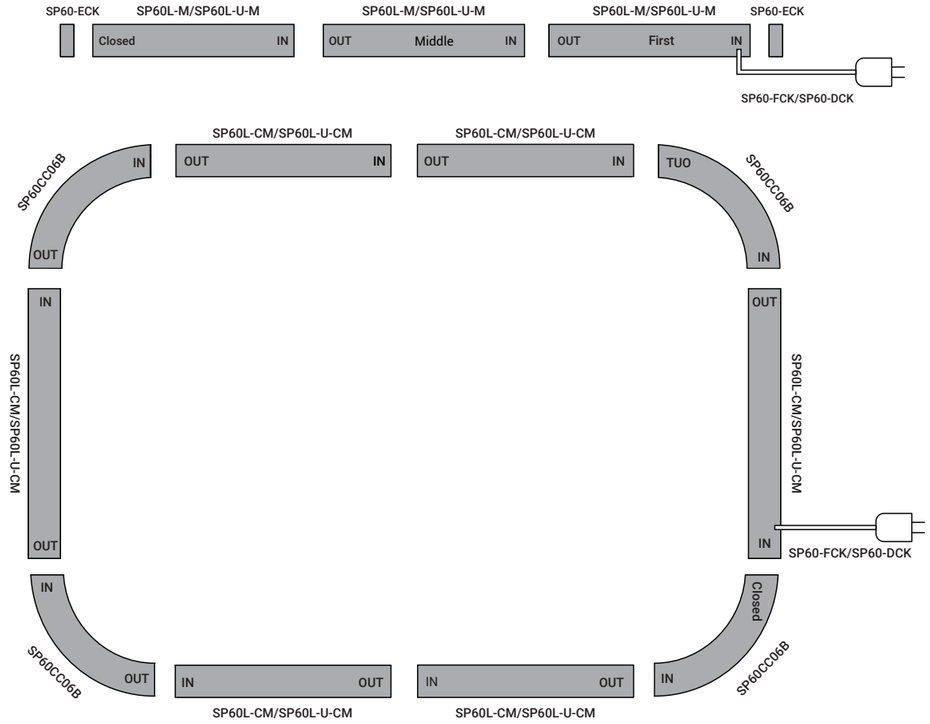

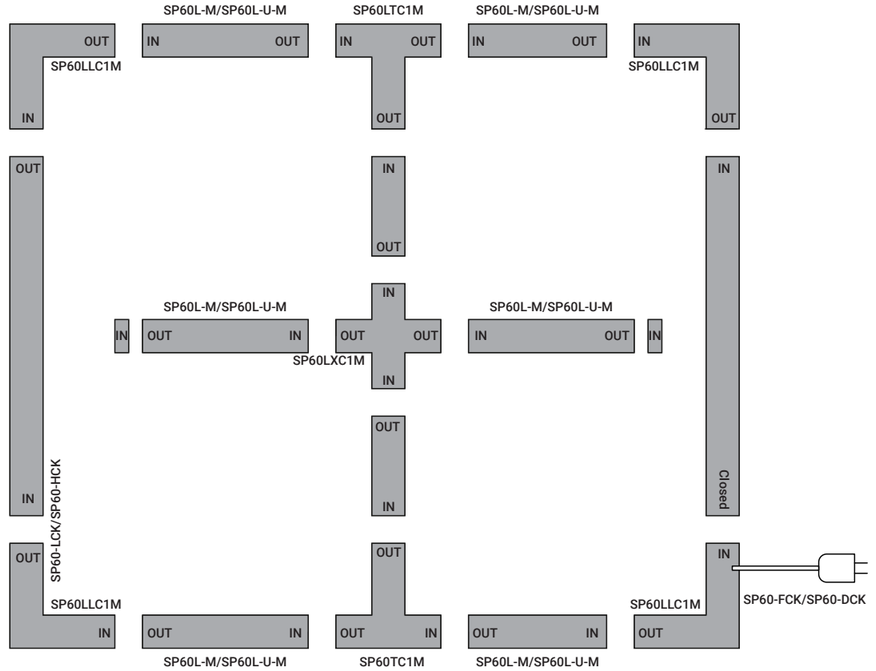

SPACE 60 PRO Ring

Premium Minimalist Circular Luminaire
UGR<19 for Direct and Indirect Light Version
Up to 130 lm/W High-Efficiency Performance
Available in 8 Diameters and 3 Mounting Options




SPACE 60 PRO Ring – Linear System


New

The **SPACE 60 PRO Ring** is a comprehensive series of circular luminaires available in a full range of sizes, with diameters from Ø660mm to Ø3060mm (refer to the size chart for details).
It offers three mounting options—pendant, surface-mounted, trim and trimless recessed—for versatile use across various architectural applications.
The pendant version is also available with an optional uplight function, providing softer, more uniform ambient illumination and enhanced visual comfort.


Pendant, Surface-Mounted, Trimless Recessed & Trim Recessed Mounting Options

Mountings:

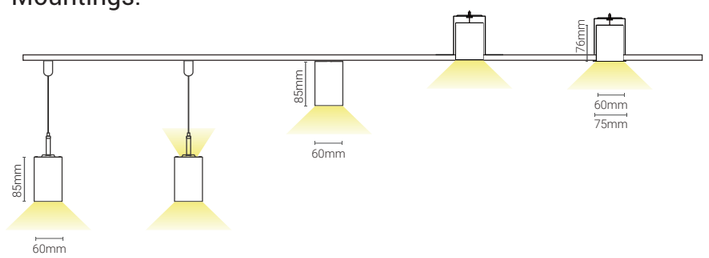

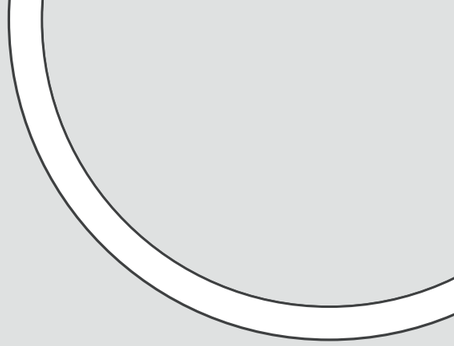


Surface-Mounted

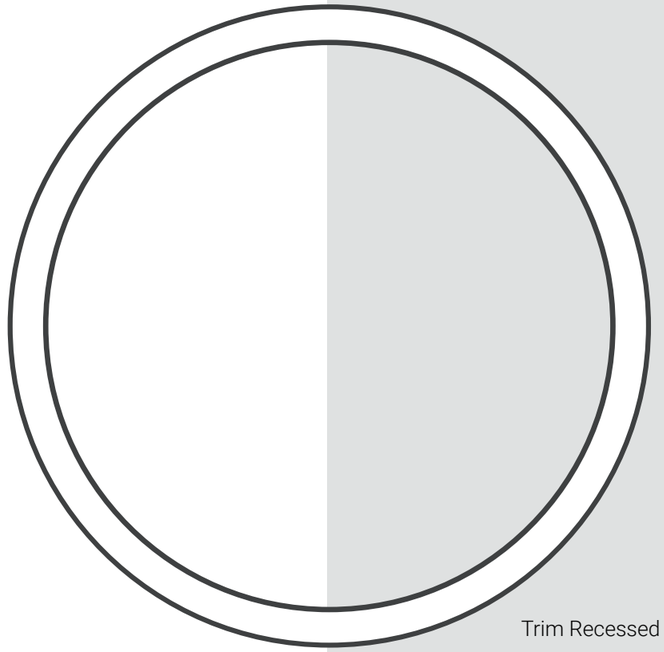


Trim Recessed

Pendant & Surface-Mounted & Trimless Recessed

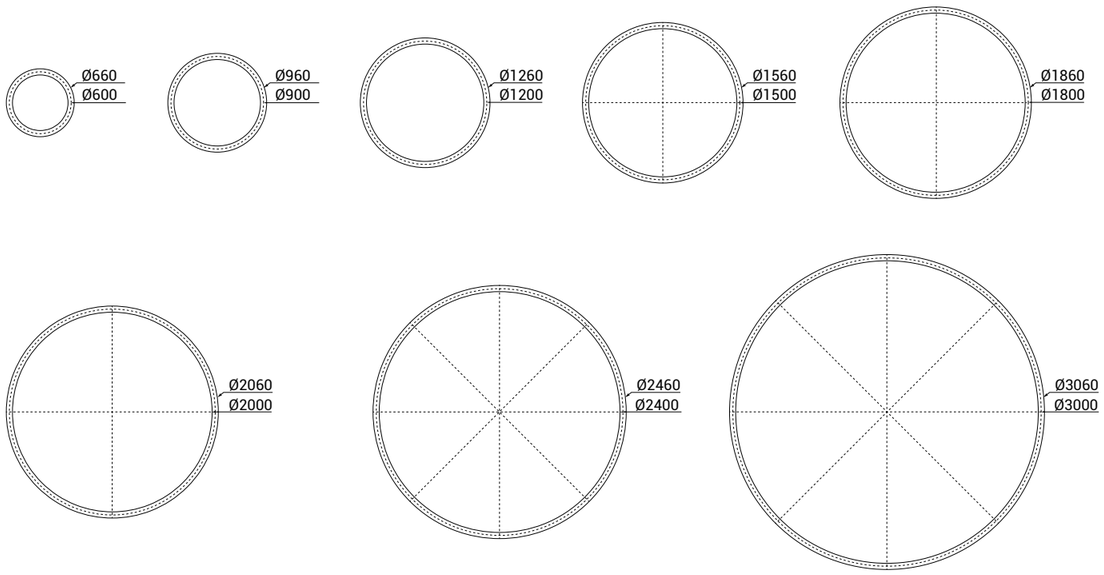


Trim Recessed

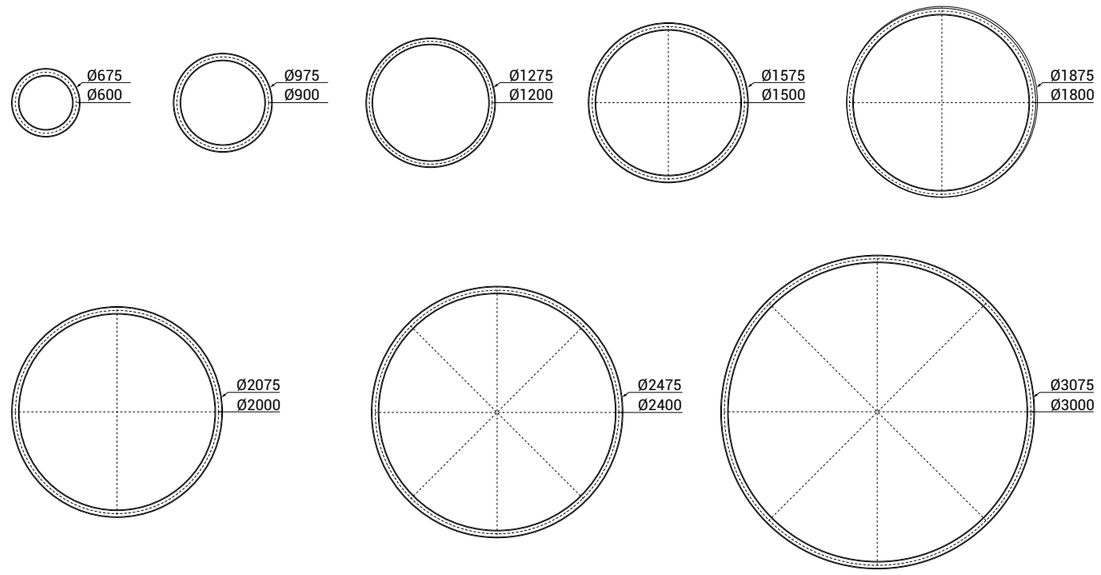

SPACE 60 PRO Ring – Pendant Direct & Indirect Linear System

New



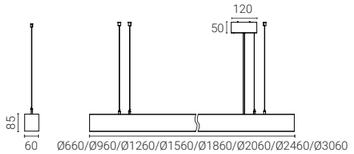


120° 80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- LED: 38W, 52W, 77W, 96W, 115W, 128W, 154W, 193W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80°↓ 120°↑
- Lumen Output: Up to 27300lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
38W	42W	33V	1100mA	D660mm	White	80	4000K	80°↓ 120°↑	5880lm	SP60CCLD066P-84080042F-WN-U
52W	57W	33V	1700mA	D960mm	White	80	4000K	80°↓ 120°↑	7980lm	SP60CCLD096P-84080057F-WN-U
77W	84W	33V	2250mA	D1260mm	White	80	4000K	80°↓ 120°↑	11760lm	SP60CCLD126P-84080084F-WN-U
96W	105W	33V	2800mA	D1560mm	White	80	4000K	80°↓ 120°↑	14700lm	SP60CCLD156P-84095105F-WN-U
115W	126W	33V	3400mA	D1860mm	White	80	4000K	80°↓ 120°↑	17640lm	SP60CCLD186P-84095126F-WN-U
128W	140W	33V	3750mA	D2060mm	White	80	4000K	80°↓ 120°↑	19600lm	SP60CCLD206P-84080140F-WN-U
154W	168W	33V	4500mA	D2460mm	White	80	4000K	80°↓ 120°↑	23520lm	SP60CCLD246P-84080168F-WN-U
193W	210W	33V	5600mA	D3060mm	White	80	4000K	80°↓ 120°↑	29400lm	SP60CCLD306P-84080210F-WN-U

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLD***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLD066P Pendant D660mm	**830** CRI>80/ 3000K	**80** 80°↓	**042** 42W	**F** On-Off	**W** White	**N** None	**U** Uplight
SP60CCLD096P Pendant D660mm	**840** CRI>80/ 4000K	**80** 80°↓ 120°↑	**057** 57W	**A** 0-10V Dim	**B** Black		
SP60CCLD126P Pendant D1260mm			**084** 84W	**D** DALI Dim			
SP60CCLD156P Pendant D1560mm			**105** 105W				
SP60CCLD186P Pendant D1860mm			**126** 126W				
SP60CCLD206P Pendant D2060mm			**140** 140W				
SP60CCLD246P Pendant D2460mm			**168** 168W				
SP60CCLD306P Pendant D3060mm			**210** 210W				



SPACE 60 PRO Ring – Pendant Direct Linear System


New



80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

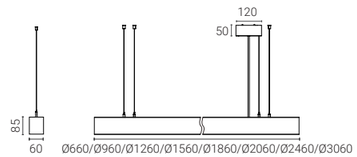

Light Distribution

■ 3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D660mm	White	80	4000K	80° ↓	3542lm	SP60CCLD066P-84080028F-WN
35W	38W	33V	1050mA	D960mm	White	80	4000K	80° ↓	5030lm	SP60CCLD096P-84080038F-WN
52W	55W	33V	1500mA	D1260mm	White	80	4000K	80° ↓	7423lm	SP60CCLD126P-84080055F-WN
65W	70W	33V	1900mA	D1560mm	White	80	4000K	80° ↓	9315lm	SP60CCLD156P-84080070F-WN
77W	84W	33V	2250mA	D1860mm	White	80	4000K	80° ↓	111031lm	SP60CCLD186P-84080084F-WN
86W	93W	33V	2500mA	D2060mm	White	80	4000K	80° ↓	123841lm	SP60CCLD206P-84080093F-WN
103W	112W	33V	3000mA	D2460mm	White	80	4000K	80° ↓	148761lm	SP60CCLD246P-84080112F-WN
129W	140W	33V	3750mA	D3060mm	White	80	4000K	80° ↓	185641lm	SP60CCLD306P-84080140F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLD***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLD066P Pendant D660mm	**830** CRI>80/ 3000K	**80** 80° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SP60CCLD096P Pendant D960mm	**840** CRI>80/ 4000K		**038** 38W	**A** 0-10V Dim	**B** Black		
SP60CCLD126P Pendant D1260mm			**055** 55W	**D** DALI Dim			
SP60CCLD156P Pendant D1560mm			**070** 70W				
SP60CCLD186P Pendant D1860mm			**084** 84W				
SP60CCLD206P Pendant D2060mm			**093** 93W				
SP60CCLD246P Pendant D2460mm			**112** 112W				
SP60CCLD306P Pendant D3060mm			**140** 140W				

SPACE 60 PRO Ring – Surface Mounted Linear System

New



80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Surface Mounted
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim



Light Distribution

■ 3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D660mm	White	80	4000K	80° ↓	3542lm	SP60CCLD066C-84080028F-WN
35W	38W	33V	1050mA	D960mm	White	80	4000K	80° ↓	5030lm	SP60CCLD096C-84080038F-WN
52W	55W	33V	1500mA	D1260mm	White	80	4000K	80° ↓	7423lm	SP60CCLD126C-84080055F-WN
65W	70W	33V	1900mA	D1560mm	White	80	4000K	80° ↓	9315lm	SP60CCLD156C-84080070F-WN
77W	84W	33V	2250mA	D1860mm	White	80	4000K	80° ↓	111031lm	SP60CCLD186C-84080084F-WN
86W	93W	33V	2500mA	D2060mm	White	80	4000K	80° ↓	123841lm	SP60CCLD206C-84080093F-WN
103W	112W	33V	3000mA	D2460mm	White	80	4000K	80° ↓	148761lm	SP60CCLD246C-84080112F-WN
129W	140W	33V	3750mA	D3060mm	White	80	4000K	80° ↓	185641lm	SP60CCLD306C-84080140F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLD***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLD066C Ceiling D660mm	**830** CRI>80/ 3000K	**80** 80° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SP60CCLD096C Ceiling D960mm	**840** CRI>80/ 4000K		**038** 38W	**A** 0-10V Dim	**B** Black		
SP60CCLD126C CeilingD1260mm			**055** 55W	**D** DALI Dim			
SP60CCLD156C Ceiling D1560mm			**070** 70W				
SP60CCLD186C CeilingD1860mm			**084** 84W				
SP60CCLD206C Ceiling D2060mm			**093** 93W				
SP60CCLD246C Ceiling D2460mm			**112** 112W				
SP60CCLD306C Ceiling D3060mm			**140** 140W				

SPACE 60 PRO Ring – Trimless Recessed Linear System

New



80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trimless Recessed
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D675mm	White	80	4000K	80° ↓	3542lm	SP60CCLD067T-84080028F-WN
35W	38W	33V	1050mA	D975mm	White	80	4000K	80° ↓	5030lm	SP60CCLD097T-84080038F-WN
52W	55W	33V	1500mA	D1275mm	White	80	4000K	80° ↓	7423lm	SP60CCLD127T-84080055F-WN
65W	70W	33V	1900mA	D1575mm	White	80	4000K	80° ↓	9315lm	SP60CCLD157T-84080070F-WN
77W	84W	33V	2250mA	D1875mm	White	80	4000K	80° ↓	11103lm	SP60CCLD187T-84080084F-WN
86W	93W	33V	2500mA	D2075mm	White	80	4000K	80° ↓	12384lm	SP60CCLD207T-84080093F-WN
103W	112W	33V	3000mA	D2475mm	White	80	4000K	80° ↓	14876lm	SP60CCLD247T-84080112F-WN
129W	140W	33V	3750mA	D3075mm	White	80	4000K	80° ↓	18564lm	SP60CCLD307T-84080140F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLD***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLD067T Trimless recessed D675mm	**830** CRI>80/ 3000K	**80** 80° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SP60CCLD097T Trimless recessed D975mm	**840** CRI>80/ 4000K		**038** 38W	**A** 0-10V Dim	**B** Black		
SP60CCLD127T Trimless recessed D1275mm			**055** 55W	**D** DALI Dim			
SP60CCLD157T Trimless recessed D1575mm			**070** 70W				
SP60CCLD187T Trimless recessed D1875mm			**084** 84W				
SP60CCLD207T Trimless recessed D2075mm			**093** 93W				
SP60CCLD247T Trimless recessed D2475mm			**112** 112W				
SP60CCLD307T Trimless recessed D3075mm			**140** 140W				

SPACE 60 PRO Ring – Trim Recessed Linear System


New



80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trim Recessed
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	750mA	D675mm	White	80	4000K	80° ↓	3542lm	SP60CCLD067F-84080028F-WN
35W	38W	33V	1050mA	D975mm	White	80	4000K	80° ↓	5030lm	SP60CCLD097F-84080038F-WN
52W	55W	33V	1500mA	D1275mm	White	80	4000K	80° ↓	7423lm	SP60CCLD127F-84080055F-WN
65W	70W	33V	1900mA	D1575mm	White	80	4000K	80° ↓	9315lm	SP60CCLD157F-84080070F-WN
77W	84W	33V	2250mA	D1875mm	White	80	4000K	80° ↓	11103lm	SP60CCLD187F-84080084F-WN
86W	93W	33V	2500mA	D2075mm	White	80	4000K	80° ↓	12384lm	SP60CCLD207F-84080093F-WN
103W	112W	33V	3000mA	D2475mm	White	80	4000K	80° ↓	14876lm	SP60CCLD247F-84080112F-WN
129W	140W	33V	3750mA	D3075mm	White	80	4000K	80° ↓	18564lm	SP60CCLD307F-84080140F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLD***– *** ** *** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLD067F Trim recessed D675mm	**830** CRI>80/ 3000K	**80** 80° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SP60CCLD097F Trim recessed D975mm	**840** CRI>80/ 4000K		**038** 38W	**A** 0-10V Dim	**B** Black		
SP60CCLD127F Trim recessed D1275mm			**055** 55W	**D** DALI Dim			
SP60CCLD157F Trim recessed D1575mm			**070** 70W				
SP60CCLD187F Trim recessed D1875mm			**084** 84W				
SP60CCLD207F Trim recessed D2075mm			**093** 93W				
SP60CCLD247F Trim recessed D2475mm			**112** 112W				
SP60CCLD307F Trim recessed D3075mm			**140** 140W				

SPACE 60 PRO Hexagon

Premium Minimalist Hexagonal Luminaire
UGR<19 for Direct and Indirect Light Version
Up to 130 lm/W High-Efficiency Performance
Available in 2 Side Lengths, 3 Mounting Options



SPACE 60 PRO Hexagon – Linear System


New

The **SPACE 60 PRO Hexagon** is a versatile series of geometric luminaires available in two side lengths—600mm and 800mm. It supports pendant, surface-mounted, and trim-recessed installations, offering flexible configuration for diverse design concepts.


The pendant version is optionally available with direct and indirect lighting, providing soft, balanced illumination and enhanced visual comfort. With its refined form and adaptable mounting options, SPACE 60 PRO Hexagon brings creative flexibility to architectural lighting design.


Pendant, Surface-Mounted, Trimless Recessed & Trim Recessed Mounting Options

Mountings:

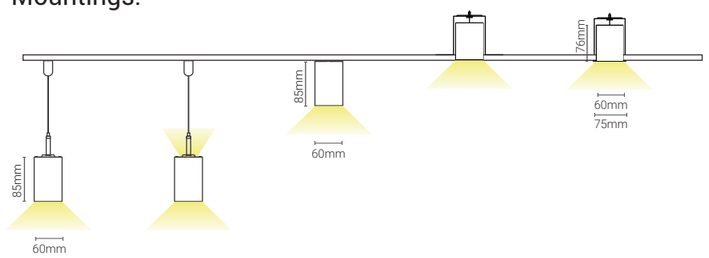



Pendant & Surface-Mounted & Trimless Recessed






Trim Recessed





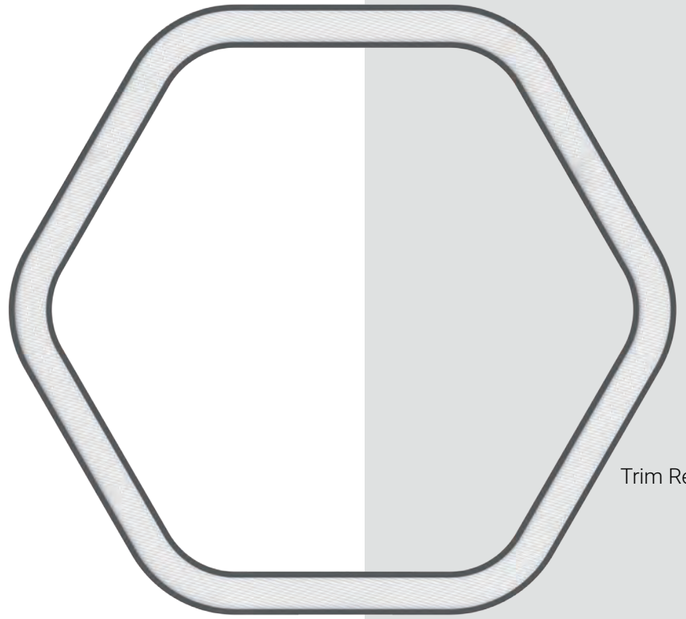

Trim Recessed



Surface-Mounted

Custom Geometric Formations



SPACE 60 PRO Hexagon – Pendant Direct & Indirect Linear System


New





120° 80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- LED: 50W ↓ 24W ↑, 63W ↓ 37W ↑ ; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 120° ↑
- Lumen Output: Up to 9100lm ↓ 6100lm ↑ System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim








Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W ↓ 24W ↑	55W ↓ 27W ↑	33V	2250mA	600mm	White	80	4000K	80° ↓ 120° ↑	7150lm ↓ 4200lm ↑	SP60CCLH060P-84080082F-WN-U
63W ↓ 37W ↑	70W ↓ 40W ↑	33V	2850mA	800mm	White	80	4000K	80° ↓ 120° ↑	9100lm ↓ 6100lm ↑	SP60CCLH080P-84080110F-WN-U

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLH060P Pendant 600mm	**830** CRI>80/ 3000K	**80** 80° ↓ 120°↑	**082** 82W	**F** On-Off	**W** White	**N** None	**U** Uplight
SP60CCLH080P Pendant 800mm	**840** CRI>80/ 4000K		**110** 110W	**A** 0-10V Dim	**B** Black		
				D DALI Dim			

SPACE 60 PRO Hexagon – Pendant Direct Linear System

New





80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct
- LED: 50W, 63W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 9100lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim









Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	80° ↓	7150lm	SP60CCLH060P-84080055F-WN
63W	70W	33V	1900mA	800mm	White	80	4000K	80° ↓	9100lm	SP60CCLH080P-84080070F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLH060P Pendant 600mm	**830** CRI>80/ 3000K	**80** 80° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
SP60CCLH080P Pendant 800mm	**840** CRI>80/ 4000K		**070** 70W	**A** 0-10V Dim	**B** Black		
				D DALI Dim			

SPACE 60 PRO Hexagon – Surface Mounted Linear System

New





80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Surface Mounted
- LED: 50W, 63W, CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 9100lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim









Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	80° ↓	7150lm	SP60CCLH060C-84080055F-WN
63W	70W	33V	1900mA	800mm	White	80	4000K	80° ↓	9100lm	SP60CCLH080C-84080070F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLH*** – *** ** *** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLH060C Ceiling 600mm	**830** CRI>80/ 3000K	**80** 80° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
SP60CCLH080C Ceiling 800mm	**840** CRI>80/ 4000K		**070** 70W	**A** 0-10V Dim	**B** Black		
				D DALI Dim			



Project: Application reference

SPACE 60 PRO Hexagon – Trimless Recessed Linear System


New



80° | 3000K □ 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Trimless Recessed
- LED: 50W, 63W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 9100lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

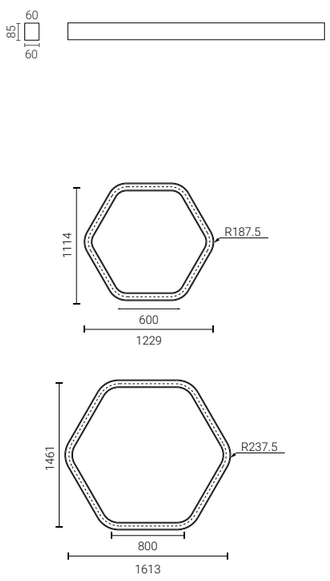

Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	80° ↓	7150lm	SP60CCLH060T-84080055F-WN
63W	70W	33V	1900mA	800mm	White	80	4000K	80° ↓	9100lm	SP60CCLH080T-84080070F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)


Coding

SP60CCLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLH060T Trimless Recessed 600mm	**830** CRI>80/ 3000K	**80** 80° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
SP60CCLH080T Trimless Recessed 800mm	**840** CRI>80/ 4000K		**070** 70W	**A** 0-10V Dim	**B** Black		
				D DALI Dim			

SPACE 60 PRO Hexagon – Trim Recessed Linear System


New



80° | 3000K □ 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Trim Recessed
- LED: 50W, 63W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 9100lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

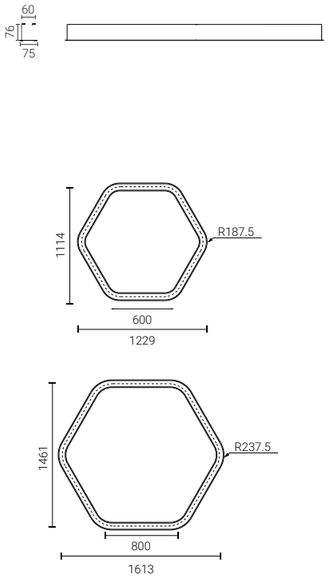

Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1550mA	600mm	White	80	4000K	80° ↓	7150lm	SP60CCLH060F-84080055F-WN
63W	70W	33V	1900mA	800mm	White	80	4000K	80° ↓	9100lm	SP60CCLH080F-84080070F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLH*** – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLH060F Trim Recessed 600mm	**830** CRI>80/ 3000K	**80** 80° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
SP60CCLH080F Trim Recessed 800mm	**840** CRI>80/ 4000K		**070** 70W	**A** 0-10V Dim	**B** Black		
				D DALI Dim			

SPACE 60 PRO
Oval

Minimalist Racetrack Oval Luminaire
Available in 2 Sizes, 3 Mounting Options
UGR<19 for Direct and Indirect Light Version
Up to 130 lm/W High-Efficiency Performance




SPACE 60 PRO Oval – Linear System

New


The **SPACE 60 PRO Oval** is a versatile linear luminaire with a racetrack oval profile.
Available in three sizes and mounting options, including pendant, surface-mounted, and recessed, it suits diverse applications. The pendant model is available in direct and indirect light distribution, creating balanced and comfortable illumination. With efficiency up to 130 lm/W and UGR < 19, the system ensures both high performance and visual comfort, with opal or microprismatic diffuser options.

Pendant, Surface-Mounted, Trimless Recessed & Trim Recessed Mounting Options


Mountings:

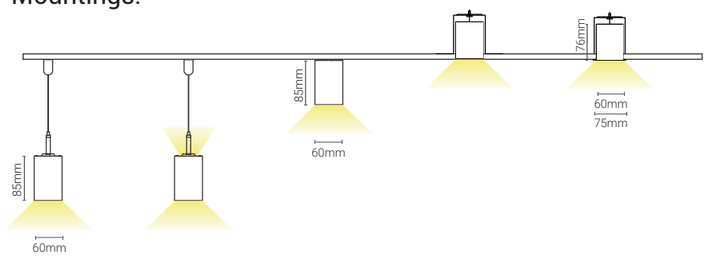


Pendant & Surface-Mounted & Trimless Recessed

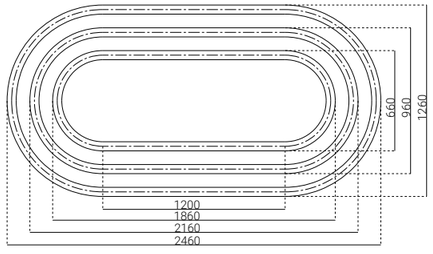


Trim Recessed

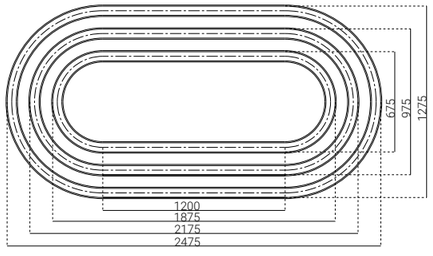

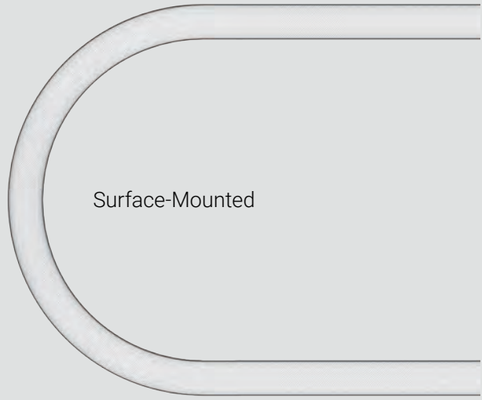

Surface-Mounted

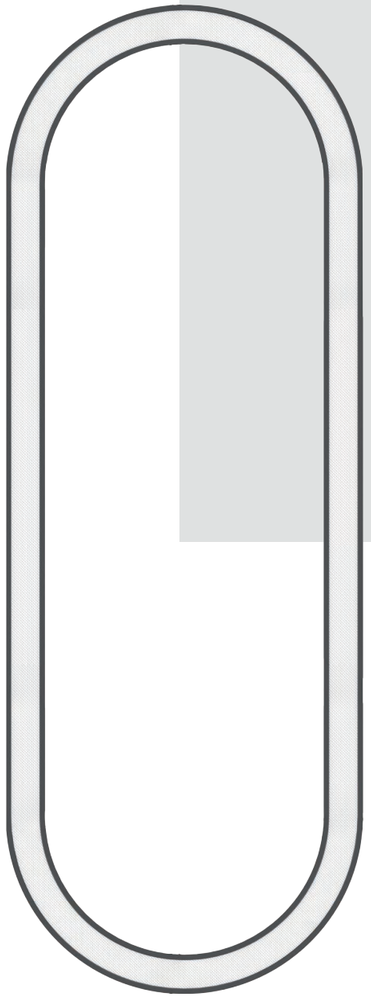

Trim Recessed

SPACE 60 PRO Oval – Pendant Direct & Indirect Linear System


New




120° 80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info


- General Lighting, Pendant Direct & Indirect
- LED: 56W ↓ 27W ↑, 66W ↓ 33W ↑, 83W ↓ 41W ↑; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓ 120° ↑
- Lumen Output: Up to 11700lm ↓ 7200lm ↑ System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim





Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W↓	27W↑	60W↓	30W↑	33V	2500mA	660mm	White	80	4000K	80° ↓ 120° ↑	7950lm ↓ 4650lm↑	SP60CCLR066P-84080090F-WN-U
66W↓	33W↑	72W↓	36W↑	33V	3000mA	960mm	White	80	4000K	80° ↓ 120° ↑	9400lm ↓ 5700lm↑	SP60CCLR096P-84080108F-WN-U
83W↓	41W↑	90W↓	45W↑	33V	3750mA	1260mm	White	80	4000K	80° ↓ 120° ↑	11700lm ↓ 7200lm↑	SP60CCLR126P-84080135F-WN-U

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding


SP60CCLR***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLR066P Pendant 660mm	**830** CRI>80/ 3000K	**80** 80° ↓	**090** 90W	**F** On-Off	**W** White	**N** None	**U** Uplight
SP60CCLR096P Pendant 960mm	**840** CRI>80/ 4000K	**80** 80° ↓ 120°↑	**108** 108W	**A** 0-10V Dim	**B** Black		
SP60CCLR126P Pendant 1260mm			**135** 135W	**D** DALI Dim			



SPACE 60 PRO Oval – Pendant Direct Linear System

New




80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct
- LED: 56W, 66W, 83W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 11700lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W	61W	33V	1700mA	660mm	White	80	4000K	80° ↓	7950lm	SP60CCLR066P-84080061F-WN
66W	72W	33V	2000mA	960mm	White	80	4000K	80° ↓	9400lm	SP60CCLR096P-84080072F-WN
83W	90W	33V	2500mA	1260mm	White	80	4000K	80° ↓	11700lm	SP60CCLR126P-84080090F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLR***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLR066P Pendant 660mm	**830** CRI>80/ 3000K	**80** 80° ↓	**061** 61W	**F** On-Off	**W** White	**N** None	
SP60CCLR096P Pendant 960mm	**840** CRI>80/ 4000K		**072** 72W	**A** 0-10V Dim	**B** Black		
SP60CCLR126P Pendant 1260mm			**090** 90W	**D** DALI Dim			

SPACE 60 PRO Oval – Surface Mounted Linear System

New




80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Surface Mounted
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W	61W	33V	1700mA	660mm	White	80	4000K	80° ↓	7950lm	SP60CCLR066C-84080061F-WN
66W	72W	33V	2000mA	960mm	White	80	4000K	80° ↓	9400lm	SP60CCLR096C-84080072F-WN
83W	90W	33V	2500mA	1260mm	White	80	4000K	80° ↓	11700lm	SP60CCLR126C-84080090F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)


Coding

SP60CCLR***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLR066C Ceiling 660mm	**830** CRI>80/ 3000K	**80** 80° ↓	**061** 61W	**F** On-Off	**W** White	**N** None	
SP60CCLR096C Ceiling 960mm	**840** CRI>80/ 4000K		**072** 72W	**A** 0-10V Dim	**B** Black		
SP60CCLR126C Ceiling 1260mm			**90** 90W	**D** DALI Dim			

SPACE 60 PRO Oval – Trimless Recessed Linear System


New



80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trimless Recessed
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim



Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W	61W	33V	1700mA	660mm	White	80	4000K	80° ↓	7950lm	SP60CCLR066T-84080061F-WN
66W	72W	33V	2000mA	960mm	White	80	4000K	80° ↓	9400lm	SP60CCLR096T-84080072F-WN
83W	90W	33V	2500mA	1260mm	White	80	4000K	80° ↓	11700lm	SP60CCLR126T-84080090F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLR***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLR066T Trimless recessed 660mm	**830** CRI>80/ 3000K	**80** 80° ↓	**061** 61W	**F** On-Off	**W** White	**N** None	
SP60CCLR096T Trimless recessed 960mm	**840** CRI>80/ 4000K		**072** 72W	**A** 0-10V Dim	**B** Black		
SP60CCLR126T Trimless recessed 1260mm			**90** 90W	**D** DALI Dim			

SPACE 60 PRO Oval – Trim Recessed Linear System


New



80° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trim Recessed
- LED: 25W, 35W, 52W, 65W, 77W, 86W, 103W, 129W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 80° ↓
- Lumen Output: Up to 18200lm System Luminous Flux
- LED Driver: ON-OFF, 0-10V Dim, DALI Dim

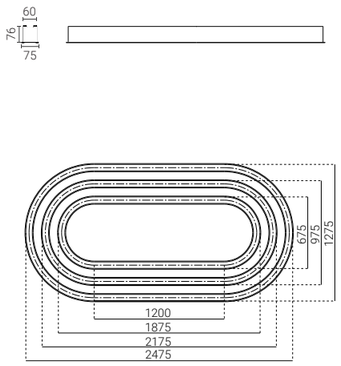

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
56W	61W	33V	1700mA	660mm	White	80	4000K	80° ↓	7950lm	SP60CCLR066F-84080061F-WN
66W	72W	33V	2000mA	960mm	White	80	4000K	80° ↓	9400lm	SP60CCLR096F-84080072F-WN
83W	90W	33V	2500mA	1260mm	White	80	4000K	80° ↓	11700lm	SP60CCLR126F-84080090F-WN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

SP60CCLR***– *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP60CCLR066F Trim recessed 660mm	**830** CRI>80/ 3000K	**80** 80° ↓	**061** 61W	**F** On-Off	**W** White	**N** None	
SP60CCLR096F Trim recessed 960mm	**840** CRI>80/ 4000K		**072** 72W	**A** 0-10V Dim	**B** Black		
SP60CCLR126F Trim recessed 1260mm			**90** 90W	**D** DALI Dim			

SPACE 40 PRO

Opal diffuser, high efficiency
45mm profile, 60mm with trim
Microprismatic optic, visual comfort
Extension modules in 70mm increments




Project: Application reference

New

Linear Layout & Seamless Light Line

Straight linear modules combine seamlessly to create continuous light compositions, supporting ordered spatial layouts with visual clarity and architectural consistency.

SPACE 40 PRO – Linear System

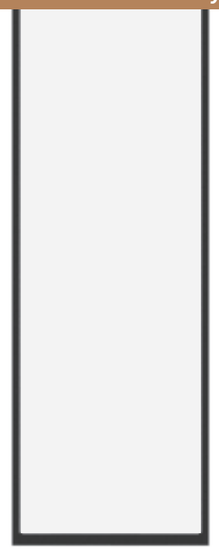

Opal Cover




Microprismatic Cover
**Optional*


- **Profile width:** 45mm, precisely engineered for sleek integration
- **Standard lengths:** 1198mm /1478mm /1828mm /2388mm (including 4mm end caps per side)
- **Mountings:** Pendant (direct /indirect)/ Pendant (direct)/ Surface mounted / Trim Recessed /Trimless Recessed
- **Connecting modules:** L-corner, T-corner, X-corner options
- **Tailored lengths configuration:** Tailored in **70** mm increments, length range **560-2800** mm.

Standard Lengths:

**Include endcaps*

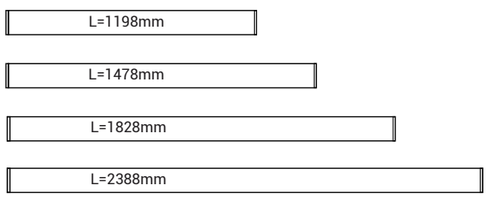

Mountings:

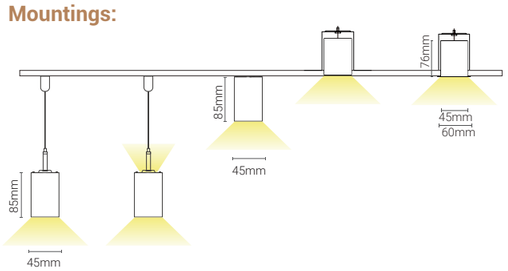


Tailored length :

70mm

Tailored increment unit in* **70mm



560 mm Min. ⟷ *2800 mm* Max.

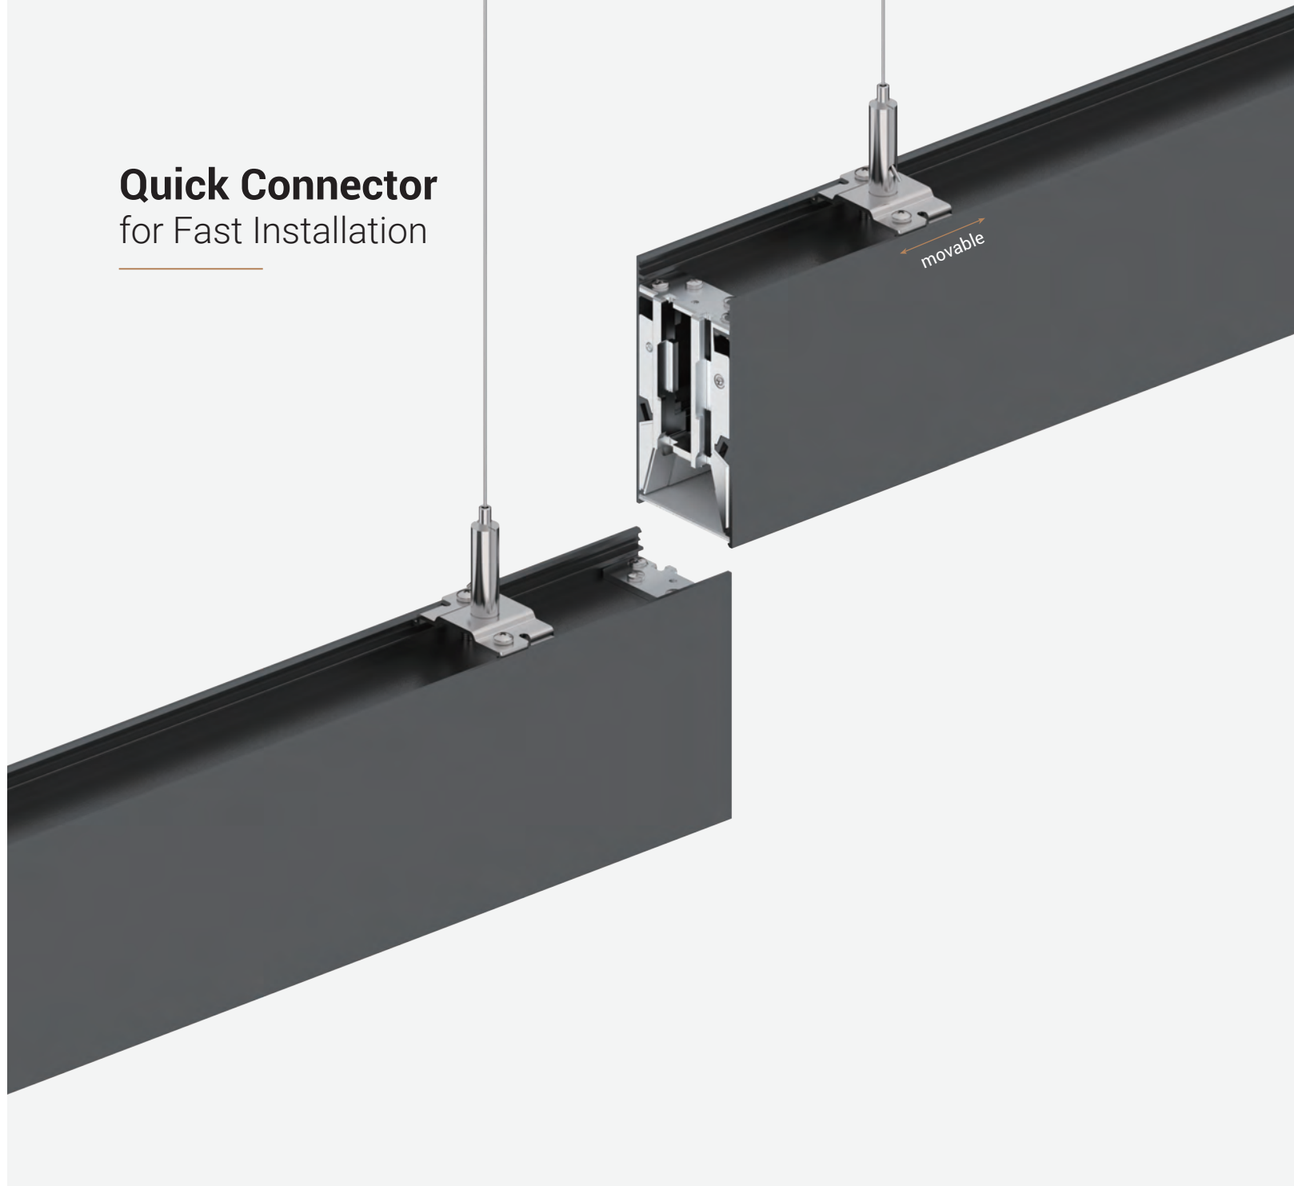

Quick Connector
for Fast Installation

Product Features:



Seamless joints
with no light leakage



Customizable
shape modules



Custom lengths
available in
70mm increments



Microprismatic diffuser
for visual comfort
direct/indirect

SPACE 40 PRO – Pendant Direct & Indirect Linear System


New



120° 120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓ 120° ↑
- Lumen Output: Up to 5200lm ↓ 2600lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	120° ↓ 120° ↑	2700lm ↓ 1350lm ↑	SP40LGL119P-840A2027F-WN-U
29W	33W	28V	1050mA	1478mm	White	80	4000K	120° ↓ 120° ↑	3300lm ↓ 1650lm ↑	SP40LGL147P-840A2033F-WN-U
36W	40W	28V	1300mA	1828mm	White	80	4000K	120° ↓ 120° ↑	4000lm ↓ 2000lm ↑	SP40LGL182P-840A2040F-WN-U
47W	52W	28V	1700mA	2388mm	White	80	4000K	120° ↓ 120° ↑	5200lm ↓ 2600lm ↑	SP40LGL238P-840A2052F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL119P Pendant 1198mm	**830** CRI80/ 3000K	**A2** 120° ↓ 120° ↑	**27** 27W	**F** On-Off	**W** White	**N** None	**U** Uplight
SP40LGL147P Pendant 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL182P Pendant 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL238P Pendant 2388mm	**940** CRI90/ 4000K		**52** 52W				

Customized Lengths Available:

Endcap Kit=2X4mm

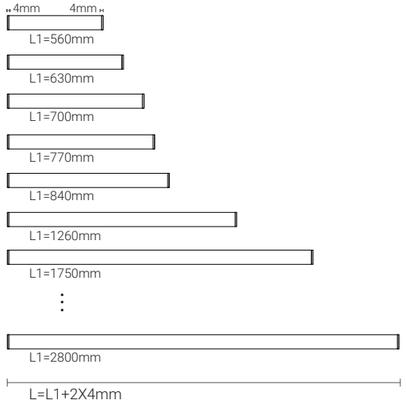

Customized Output:
Direct Lighting: 17W/m, 22W/m 150lm/W, @840
Direct & Indirect Lighting: 22W/m 150lm/W, @840

Project: Application reference

SPACE 40 PRO – Pendant Direct Linear System

New



120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 7800lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K




4000K



Customized Lengths Available:

Endcap Kit=2X4mm

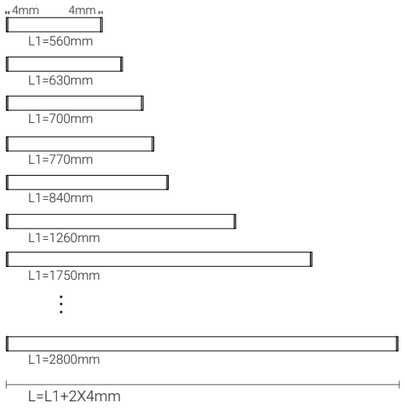

Customized Output:

Direct Lighting: 17W/m, 22W/m 150lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	120° ↓	4050lm ↓	SP40LGL119P-840A2027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	120° ↓	4950lm ↓	SP40LGL147P-840A2033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	120° ↓	6000lm ↓	SP40LGL182P-840A2040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	120° ↓	7800lm ↓	SP40LGL238P-840A2052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL119P Pendant 1198mm	**830** CRI80/ 3000K	**A2** 120° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP40LGL147P Pendant 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL182P Pendant 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL238P Pendant 2388mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 40 PRO – Surface Mounted Linear System


New



120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 7800lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K




4000K



Customized Lengths Available:

Endcap Kit=2X4mm

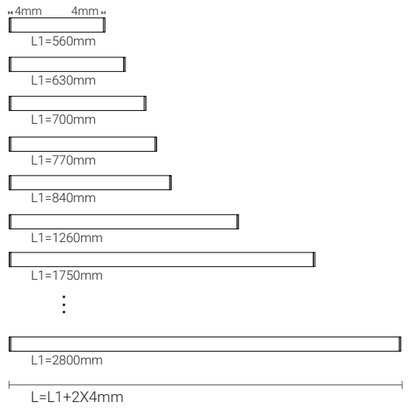

Customized Output:

Direct Lighting: 17W/m, 22W/m 150lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	120° ↓	4050lm ↓	SP40LGL119C-840A2027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	120° ↓	4950lm ↓	SP40LGL147C-840A2033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	120° ↓	6000lm ↓	SP40LGL182C-840A2040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	120° ↓	7800lm ↓	SP40LGL238C-840A2052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL119C Surface 1198mm	**830** CRI80/ 3000K	**A2** 120° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP40LGL147C Surface 1478mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL182C Surface 1828mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL238C Surface 2388mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 40 PRO – Trimless Recessed Linear System


New



120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 7800lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K




4000K



Customized Lengths Available:

Endcap Kit=2X4mm



L1=560mm

L1=630mm

L1=700mm

L1=770mm

L1=840mm

L1=1260mm

L1=1750mm

⋮

L1=2800mm

L=L1+2X4mm

Customized Output:

Direct Lighting: 17W/m, 22W/m 150lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1198mm	White	80	4000K	120° ↓	4050lm ↓	SP40LGL119T-840A2027F-WN
29W	33W	28V	1050mA	1478mm	White	80	4000K	120° ↓	4950lm ↓	SP40LGL147T-840A2033F-WN
36W	40W	28V	1300mA	1828mm	White	80	4000K	120° ↓	6000lm ↓	SP40LGL182T-840A2040F-WN
47W	52W	28V	1700mA	2388mm	White	80	4000K	120° ↓	7800lm ↓	SP40LGL238T-840A2052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL119T Trimless Recessed 1198mm	**830** CRI80/ 3000K	**A2** 120° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP40LGL147T Trimless Recessed 1198mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL182T Trimless Recessed 1198mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL238T Trimless Recessed 1198mm	**940** CRI90/ 4000K		**52** 52W				

SPACE 40 PRO – Trim Recessed Linear System


New



120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Trim Recessed Mounted
- System Power: 27W, 33W, 40W, 52W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 7800lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim




Light Distribution

3000K




4000K



Customized Lengths Available:

Endcap Kit=2X11.5mm



L1=560mm

L1=630mm

L1=700mm

L1=770mm

L1=840mm

L1=1260mm

L1=1750mm

⋮

L1=2800mm

L=L1+2X11.5mm

Customized Output:

Direct Lighting: 17W/m, 22W/m 150lm/W, @840

Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
24W	27W	28V	850mA	1213mm	White	80	4000K	120° ↓	4050lm ↓	SP40LGL121F-840A2027F-WN
29W	33W	28V	1050mA	1493mm	White	80	4000K	120° ↓	4950lm ↓	SP40LGL149F-840A2033F-WN
36W	40W	28V	1300mA	1843mm	White	80	4000K	120° ↓	6000lm ↓	SP40LGL184F-840A2040F-WN
47W	52W	28V	1700mA	2403mm	White	80	4000K	120° ↓	7800lm ↓	SP40LGL240F-840A2052F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LGL121F Trim Recessed 1213mm	**830** CRI80/ 3000K	**A2** 120° ↓	**27** 27W	**F** On-Off	**W** White	**N** None	
SP40LGL149F Trim Recessed 1493mm	**840** CRI80/ 4000K		**33** 33W	**D** DALI Dim	**B** Black		
SP40LGL184F Trim Recessed 1843mm	**930** CRI90/ 3000K		**40** 40W				
SP40LGL240F Trim Recessed 2403mm	**940** CRI90/ 4000K		**52** 52W				

Project: Application reference

New

Curved Composition & Seamless Continuity

Curved linear modules in different radii can be freely combined to form fluid layouts and expressive compositions, enabling continuous light lines that follow architectural movement and spatial flow.


SPACE 40 PRO Curve – Pendant Direct & Indirect linear system





120° 120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UK CA | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↑ 120° ↓
- Lumen Output: Up to 3100lm ↓ 1550lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim









Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	1036mm	White	80	4000K	120°↓120°↑	2200lm↓1100lm↑	SP40CGLC06AP-840A222F-WN-U-CM
28W	31W	28V	1000mA	1507mm	White	80	4000K	120°↓120°↑	3100lm↓1550lm↑	SP40CGLC09AP-840A231F-WN-U-CM
10W	11W	28V	350mA	518mm	White	80	4000K	120°↓120°↑	1100lm↓ 550lm↑	SP40CGLC06BP-840A211F-WN-U-CM
14W	16W	28V	500mA	754mm	White	80	4000K	120°↓120°↑	1600lm↓ 800lm↑	SP40CGLC09BP-840A216F-WN-U-CM
20W	22W	28V	700mA	989mm	White	80	4000K	120°↓120°↑	2200lm↓1100lm↑	SP40CGLC12BP-840A222F-WN-U-CM
24W	27W	28V	850mA	1225mm	White	80	4000K	120°↓120°↑	2700lm↓1350lm↑	SP40CGLC15BP-840A227F-WN-U-CM
28W	31W	28V	1000mA	1460mm	White	80	4000K	120°↓120°↑	3100lm↓1550lm↑	SP40CGLC18BP-840A231F-WN-U-CM
20W	22W	28V	700mA	966mm	White	80	4000K	120°↓120°↑	2200lm↓1100lm↑	SP40CGLC24CP-840A222F-WN-U-CM
24W	27W	28V	850mA	1201mm	White	80	4000K	120°↓120°↑	2700lm↓1350lm↑	SP40CGLC30CP-840A227F-WN-U-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AP Pendant D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A2** 120°↓120°↑	**11** 11W	**F** On-Off	**W** White	**N** None	**U** With Uplight, Extrusion Cover
SP40CGLC09AP Pendant D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP40CGLC06BP Pendant D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BP Pendant D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP40CGLC12BP Pendant D1200mm 1/4 of a Circle			**31** 31W				
SP40CGLC15BP Pendant D1500mm 1/4 of a Circle							
SP40CGLC18BP Pendant D1800mm 1/4 of a Circle							
SP40CGLC24CP Pendant D2400mm 1/8 of Circle							
SP40CGLC30CP Pendant D3000mm 1/8 of a Circle							



SPACE 40 PRO Curve – Pendant Direct linear system


New



120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Light, Version also Available
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 4650lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim





Light Distribution


3000K



4000K







Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	1036mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC06AP-840A222F-WN-CM
28W	31W	28V	1000mA	1507mm	White	80	4000K	120° ↓	4650lm ↓	SP40CGLC09AP-840A231F-WN-CM
10W	11W	28V	350mA	518mm	White	80	4000K	120° ↓	1650lm ↓	SP40CGLC06BP-840A211F-WN-CM
14W	16W	28V	500mA	754mm	White	80	4000K	120° ↓	2400lm ↓	SP40CGLC09BP-840A216F-WN-CM
20W	22W	28V	700mA	989mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC12BP-840A222F-WN-CM
24W	27W	28V	850mA	1225mm	White	80	4000K	120° ↓	4050lm ↓	SP40CGLC15BP-840A227F-WN-CM
28W	31W	28V	1000mA	1460mm	White	80	4000K	120° ↓	4650lm ↓	SP40CGLC18BP-840A231F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC24CP-840A222F-WN-CM
24W	27W	28V	850mA	1201mm	White	80	4000K	120° ↓	4050lm ↓	SP40CGLC30CP-840A227F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AP Pendant D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A2** 120° ↓	**11** 11W	**F** On-Off	**W** White	**N** None	
SP40CGLC09AP Pendant D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP40CGLC06BP Pendant D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BP Pendant D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP40CGLC12BP Pendant D1200mm 1/4 of a Circle			**31** 31W				
SP40CGLC15BP Pendant D1500mm 1/4 of a Circle							
SP40CGLC18BP Pendant D1800mm 1/4 of a Circle							
SP40CGLC24CP Pendant D2400mm 1/8 of a Circle							
SP40CGLC30CP Pendant D3000mm 1/8 of a Circle							

SPACE 40 PRO Curve – Surface Mounted Linear System


New



120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Light, Version also Available
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 4650lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim





Light Distribution


3000K



4000K







Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	1036mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC06AC-840A222F-WN-CM
28W	31W	28V	1000mA	1507mm	White	80	4000K	120° ↓	4650lm ↓	SP40CGLC09AC-840A231F-WN-CM
10W	11W	28V	350mA	518mm	White	80	4000K	120° ↓	1650lm ↓	SP40CGLC06BC-840A211F-WN-CM
14W	16W	28V	500mA	754mm	White	80	4000K	120° ↓	2400lm ↓	SP40CGLC09BC-840A216F-WN-CM
20W	22W	28V	700mA	989mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC12BC-840A222F-WN-CM
24W	27W	28V	850mA	1225mm	White	80	4000K	120° ↓	4050lm ↓	SP40CGLC15BC-840A227F-WN-CM
28W	31W	28V	1000mA	1460mm	White	80	4000K	120° ↓	4650lm ↓	SP40CGLC18BC-840A231F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC24CC-840A222F-WN-CM
24W	27W	28V	850mA	1201mm	White	80	4000K	120° ↓	4050lm ↓	SP40CGLC30CC-840A227F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AC Surface D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A2** 120° ↓	**11** 11W	**F** On-Off	**W** White	**N** None	
SP40CGLC09AC Surface D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP40CGLC06BC Surface D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BC Surface D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP40CGLC12BC Surface D1200mm 1/4 of a Circle			**31** 31W				
SP40CGLC15BC Surface D1500mm 1/4 of a Circle							
SP40CGLC18BC Surface D1800mm 1/4 of a Circle							
SP40CGLC24CC Surface D2400mm 1/8 of a Circle							
SP40CGLC30CC Surface D3000mm 1/8 of a Circle							

SPACE 40 PRO Curve – Trimless Recessed Linear System


New



120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Light, Version also Available
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 4650lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim





Light Distribution


3000K



4000K







Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	1036mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC06AT-840A222F-WN-CM
28W	31W	28V	1000mA	1507mm	White	80	4000K	120° ↓	4650lm ↓	SP40CGLC09AT-840A231F-WN-CM
10W	11W	28V	350mA	518mm	White	80	4000K	120° ↓	1650lm ↓	SP40CGLC06BT-840A211F-WN-CM
14W	16W	28V	500mA	754mm	White	80	4000K	120° ↓	2400lm ↓	SP40CGLC09BT-840A216F-WN-CM
20W	22W	28V	700mA	989mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC12BT-840A222F-WN-CM
24W	27W	28V	850mA	1225mm	White	80	4000K	120° ↓	4050lm ↓	SP40CGLC15BT-840A227F-WN-CM
28W	31W	28V	1000mA	1460mm	White	80	4000K	120° ↓	4650lm ↓	SP40CGLC18BT-840A231F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC24CT-840A222F-WN-CM
24W	27W	28V	850mA	1201mm	White	80	4000K	120° ↓	4050lm ↓	SP40CGLC30CT-840A227F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)


Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AT Trimless Recessed D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A2** 120° ↓	**11** 11W	**F** On-Off	**W** White	**N** None	
SP40CGLC09AT Trimless Recessed D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP40CGLC06BT Trimless Recessed D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BT Trimless Recessed D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP40CGLC12BT Trimless Recessed D1200mm 1/4 of a Circle			**31** 31W				
SP40CGLC15BT Trimless Recessed D1500mm 1/4 of a Circle							
SP40CGLC18BT Trimless Recessed D1800mm 1/4 of a Circle							
SP40CGLC24CT Trimless Recessed D2400mm 1/8 of a Circle							
SP40CGLC30CT Trimless Recessed D3000mm 1/8 of a Circle							

SPACE 40 PRO Curve – Trim Recessed Linear System


New



120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Light, Version also Available
- System Power: 11W, 16W, 22W, 27W, 31W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 4650lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim





Light Distribution


3000K



4000K







Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
20W	22W	28V	700mA	1036mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC06AF-840A222F-WN-CM
28W	31W	28V	1000mA	1507mm	White	80	4000K	120° ↓	4650lm ↓	SP40CGLC09AF-840A231F-WN-CM
10W	11W	28V	350mA	518mm	White	80	4000K	120° ↓	1650lm ↓	SP40CGLC06BF-840A211F-WN-CM
14W	16W	28V	500mA	754mm	White	80	4000K	120° ↓	2400lm ↓	SP40CGLC09BF-840A216F-WN-CM
20W	22W	28V	700mA	989mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC12BF-840A222F-WN-CM
24W	27W	28V	850mA	1225mm	White	80	4000K	120° ↓	4050lm ↓	SP40CGLC15BF-840A227F-WN-CM
28W	31W	28V	1000mA	1460mm	White	80	4000K	120° ↓	4650lm ↓	SP40CGLC18BF-840A231F-WN-CM
20W	22W	28V	700mA	966mm	White	80	4000K	120° ↓	3300lm ↓	SP40CGLC24CF-840A222F-WN-CM
24W	27W	28V	850mA	1201mm	White	80	4000K	120° ↓	4050lm ↓	SP40CGLC30CF-840A227F-WN-CM

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLC06AF Trim Recessed D600mm 1/2 of a Circle	**830** CRI80/ 3000K	**A2** 120° ↓	**11** 11W	**F** On-Off	**W** White	**N** None	
SP40CGLC09AF Trim Recessed D900mm 1/2 of a Circle	**840** CRI80/ 4000K		**16** 16W	**D** DALI Dim	**B** Black		
SP40CGLC06BF Trim Recessed D600mm 1/4 of a Circle	**930** CRI90/ 3000K		**22** 22W				
SP40CGLC09BF Trim Recessed D900mm 1/4 of a Circle	**940** CRI90/ 4000K		**27** 27W				
SP40CGLC12BF Trim Recessed D1200mm 1/4 of a Circle			**31** 31W				
SP40CGLC15BF Trim Recessed D1500mm 1/4 of a Circle							
SP40CGLC18BF Trim Recessed D1800mm 1/4 of a Circle							
SP40CGLC24CF Trim Recessed D2400mm 1/8 of a Circle							
SP40CGLC30CF Trim Recessed D3000mm 1/8 of a Circle							

SPACE 40 PRO – Corner Modules Linear System




120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Corner Modules for Pendant & Surface Mounted & Trimless Recessed Mounted Linear System
- System Power: 12W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 1350lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim







SP40LLC1M
L Corner



SP40LTC1M
T Corner




SP40LXC1M
X Corner




SP40LVC1M
V 135°Corner

Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	120° ↓	1800lm	SP40LLC1M-840A212F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	120° ↓	1800lm	SP40LTC1M-840A212F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	120° ↓	1800lm	SP40LXC1M-840A212F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	120° ↓	1800lm	SP40LLC2M-840A212F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LLC1M L Corner 280*280mm	**830** CRI80/ 3000K	**A2** 120° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SP40LTC1M T Corner 280*280mm	**840** CRI80/ 4000K			**D** DALI Dim	**B** Black		
SP40LXC1M X Corner 280*280mm	**930** CRI90/ 3000K						
SP40LLC2M L corner(135°) 280*280mm	**940** CRI90/ 4000K						

SPACE 40 PRO – Corner Modules for Trim Recessed Linear System




120° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | CB | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Corner Modules for Pendant & Surface Mounted & Trimless Recessed Mounted Linear System
- System Power: 12W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 120° ↓
- Lumen Output: Up to 1350lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim







SP40LLC1F
L Corner



SP40LTC1F
T Corner




SP40LXC1F
X Corner




SP40LVC1F
V 135°Corner

Light Distribution

3000K



4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Length	Color	CRI	CCT	Beam	System Output	Code
10W	12W	28V	350mA	280x280mm	White	80	4000K	120° ↓	1800lm	SP40LLC1F-840A212F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	120° ↓	1800lm	SP40LTC1F-840A212F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	120° ↓	1800lm	SP40LXC1F-840A212F-WN
10W	12W	28V	350mA	280x280mm	White	80	4000K	120° ↓	1800lm	SP40LLC2F-840A212F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40LLC1F Trim Recessed L Corner 280*280mm	**830** CRI80/ 3000K	**A2** 120° ↓	**12** 12W	**F** On-Off	**W** White	**N** None	
SP40LTC1F Trim Recessed T Corner 280*280mm	**840** CRI80/ 4000K			**D** DALI Dim	**B** Black		
SP40LXC1F Trim Recessed X Corner 280*280mm	**930** CRI90/ 3000K						
SP40LLC2F Trim Recessed L corner(135°) 280*280mm	**940** CRI90/ 4000K						

New

Lengths



SP40L
Single
560~2800mm



SP40L-M/SP40L-CM
Lines
560~2800mm



SP40L-U-M/SP40L-U-CM
Line Uplight Modules
560~2800mm



SP40L-F-C
Lines
560~2800mm

L / T / X / 1/4 Circle Corners



SP40LLC1M
L Corner
280*280mm



SP40LTC1M
T Corner
280*280mm



SP40LXC1M
X Corner
280*280mm



SP40LVC1M
V 135°Corner
280*280mm



SP40CC06B
1/4 Circle Corners
inner radius120/240

L / T / X Corners Trim Version



SP40LLC1F
L Corner
280*280mm
For Trim Recessed Mounted




SP40LTC1F
T Corner
280*280mm
For Trim Recessed Mounted



SP40LXC1F
X Corner
280*280mm
For Trim Recessed Mounted



SP40LVC1F
V 135°Corner
280*280mm



SP40-ECK
End Caps
W60 H76mm
For Trim Recessed Mounted

Installation Kits



SP40-ECK
End Caps
W45 H85mm
For Pendant & Surface Mounted
& Trimless Recessed Mounted



SP40-TRK
For Trimless Recessed Mounted



SP40-FRK
For Trim Recessed Mounted




SP40-PK2
SP40-PWK(no Ceiling Box)
Suspension Mounting
2m
For Pendant

Installation Kits




SP40-SMK
Surface Mounting
For Surface Mounted




SP40-FCK(ON/OF)
SP40-DCK(DALI)
2.5mm




SP40-FOPC
Opal Cover
Roll 30m



SP40-FMPC
Microprismatic Cover
Roll 30m

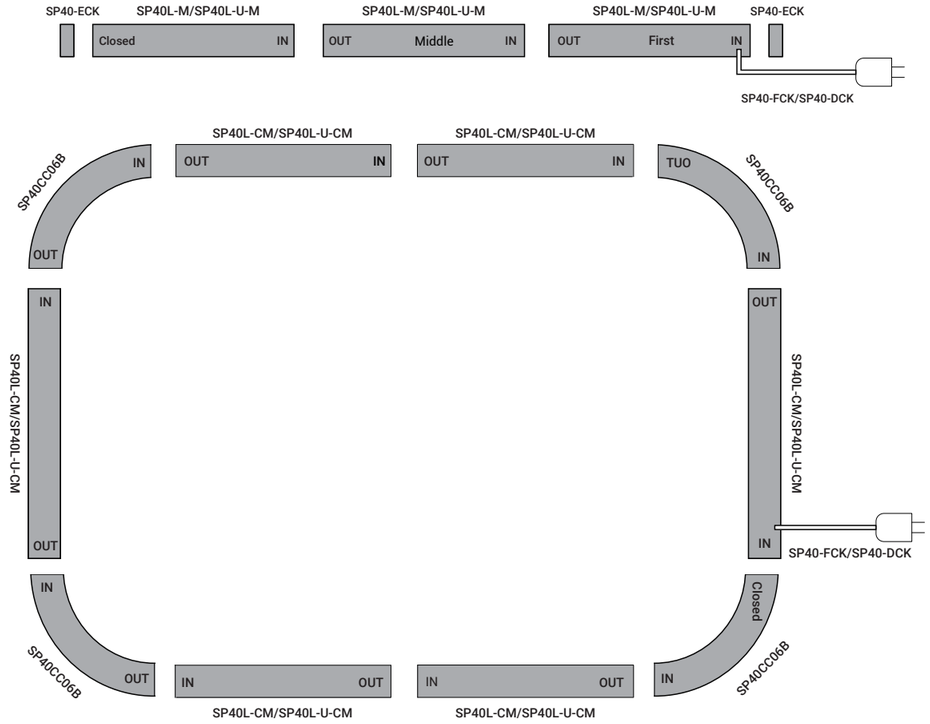

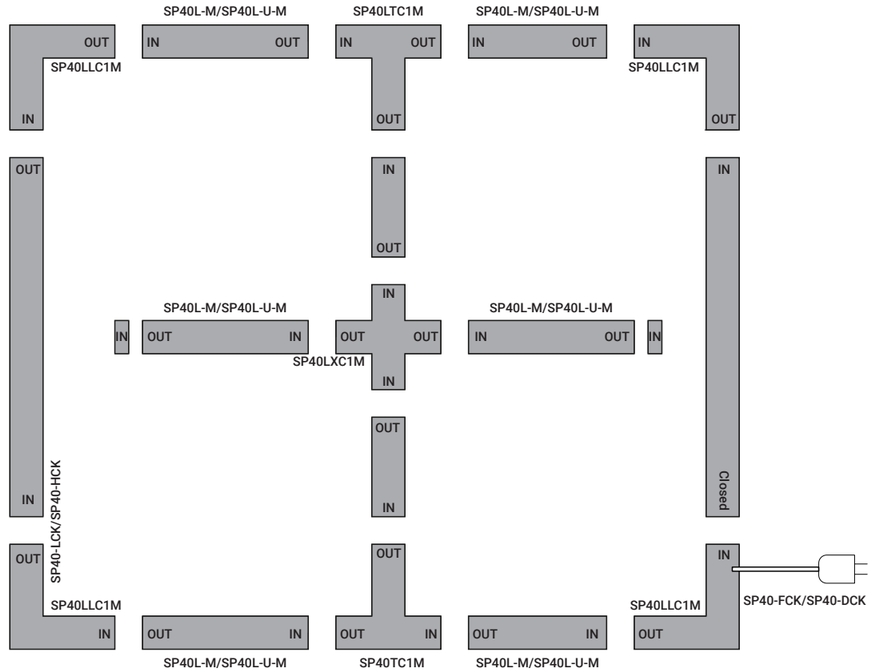

SPACE 40 PRO Ring

For public and circulation areas
40mm circular light for public spaces
Clean circle with controlled light distribution
Available in multiple size & mounting options




SPACE 40 PRO Ring – Linear System

New


The SPACE 40 PRO Ring is a circular luminaire intended for public interiors and shared spaces.
It incorporates a continuous 40 mm light emission profile and is available in multiple diameters to suit different spatial scales.
Pendant, surface-mounted and trim recessed mounting options enable flexible integration into a wide range of architectural environments.
Its clean circular geometry and controlled light distribution help define areas and create visual focus within open spaces.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options

Mountings:

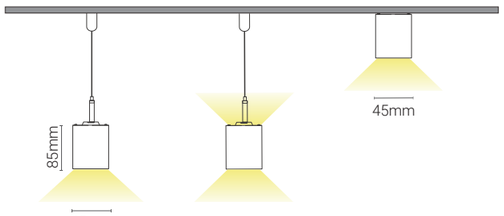

Pendant and Surface-Mounted

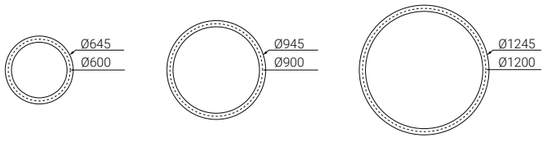

SPACE 40 PRO Ring – Pendant Direct & Indirect Linear System


New



110° 105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 42W, 55W, 84W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓ 110° ↑
- Lumen Output: Up to 7300lm ↓ 3650lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W ↓ 12W ↑	28W ↓ 14W ↑	33V	1350mA	Ø645mm	White	80	4000K	105° ↓ 110° ↑	3700lm ↓ 1850lm ↑	SP40CGLD094P-840A0042F-WN-U
35W ↓ 38W ↑	38W ↓ 17W ↑	33V	1850mA	Ø945mm	White	80	4000K	105° ↓ 110° ↑	5000lm ↓ 2500lm ↑	SP40CGLD094P-840A0055F-WN-U
52W ↓ 27W ↑	55W ↓ 29W ↑	33V	2250mA	Ø1245mm	White	80	4000K	105° ↓ 110° ↑	7300lm ↓ 3650lm ↑	SP40CGLD124P-840A0084F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLD064P Pendant Ø645mm	**830** CRI>80/ 3000K	**A0** 105° ↓ 110° ↑	**042** 42W	**F** On-Off	**W** White	**N** None	**U** Uplight
SP40CGLD094P Pendant Ø945mm	**840** CRI>80/ 4000K		**055** 55W	**D** DALI Dim	**B** Black		
SP40CGLD124P Pendant Ø1245mm			**084** 84W				

SPACE 40 PRO Ring – Pendant Direct Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- System Power: 28W, 38W, 55W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6900lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

■ 3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	900mA	Ø645mm	White	80	4000K	105° ↓	3500lm	SP40CGLD064P-840A0028F-WN
35W	38W	33V	1250mA	Ø945mm	White	80	4000K	105° ↓	4750lm	SP40CGLD094P-840A0038F-WN
52W	55W	33V	1750mA	Ø1245mm	White	80	4000K	105° ↓	6900lm	SP40CGLD124P-840A0055F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLD064P Pendant Ø645mm	**830** CRI>80/ 3000K	**A0** 105°↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SP40CGLD094P Pendant Ø945mm	**840** CRI>80/ 4000K		**038** 38W	**D** DALI Dim	**B** Black		
SP40CGLD124P Pendant Ø1245mm			**055** 55W				

SPACE 40 PRO Ring – Surface Mounted Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Surface Mounted
- System Power: 28W, 38W, 55W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6900lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

■ 3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	900mA	Ø645mm	White	80	4000K	105° ↓	3500lm	SP40CGLD064C-840A0028F-WN
35W	38W	33V	1250mA	Ø945mm	White	80	4000K	105° ↓	4750lm	SP40CGLD094C-840A0038F-WN
52W	55W	33V	1750mA	Ø1245mm	White	80	4000K	105° ↓	6900lm	SP40CGLD124C-840A0055F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLD064C Ceiling Ø645mm	**830** CRI>80/ 3000K	**A0** 105° ↓	**028** 28W	**F** On-Off	**W** White	**N** None	
SP40CGLD094C Ceiling Ø945mm	**840** CRI>80/ 4000K		**038** 38W	**D** DALI Dim	**B** Black		
SP40CGLD124C CeilingØ1245mm			**055** 55W				

SPACE 40 PRO
Hexagon

Available in two size
Two light distributions available
Flexible mounting configurations
A geometric light with a slim 40mm profile
For corridors, circulation and public spaces




New


The **SPACE 40 PRO Hexagon** is a geometric luminaire designed for public and circulation areas.
It features a 40 mm light emission profile and is available in two size options, with pendant, surface-mounted and trim recessed installation.
The hexagonal form allows structured layouts and repeatable compositions across larger spaces.
With direct or direct/indirect light distribution available, SPACE 40 PRO Hexagon supports clear spatial organisation with a refined architectural presence.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options

Mountings:

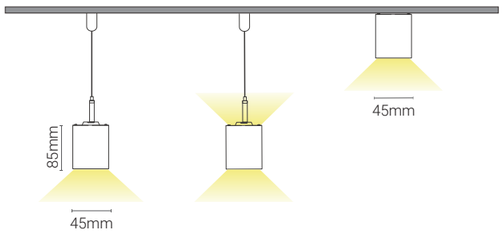

Pendant and Surface-Mounted




New



110° 105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 55W ↓ 27W ↑ ; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 95° ↓ 110° ↑
- Lumen Output: Up to 7200 ↓ 3600lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W ↓ 24W ↑	55W ↓ 27W ↑	33V	2650mA	600mm	White	80	4000K	105° ↓ 110° ↑	7200lm ↓ 3600lm ↑	SP40CGLH060P-840A0082F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLH040P Pendant 600mm	830 CRI>80/ 3000K	A0 105° ↓ 110° ↑	082 82W	F On-Off D DALI Dim	W White B Black	N None	U Uplight

SPACE 40 PRO Hexagon – Pendant Direct Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Pendant Direct
- System Power: 55W,; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6900lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1750mA	600mm	White	80	4000K	105° ↓	6900lm	SP40CGLH060P-840A055F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLH040P Pendant 600mm	**830** CRI>80/ 3000K	**A0** 105° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
	840 CRI>80/ 4000K		**070** 70W	**D** DALI Dim	**B** Black		

SPACE 40 PRO Hexagon – Surface Mounted Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- General Lighting, Surface Mounted
- System Power: 55W, CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 6900lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim



Light Distribution

4000K





Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
50W	55W	33V	1750mA	600mm	White	80	4000K	105° ↓	6900lm	SP40CGLH060C-840A055F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CGL – *** ** *** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CGLH060C Ceiling 600mm	**830** CRI>80/ 3000K	**A0** 105° ↓	**055** 55W	**F** On-Off	**W** White	**N** None	
	840 CRI>80/ 4000K			**D** DALI Dim	**B** Black		

SPACE 40 PRO Oval

An oval light with a slim 40mm profile
Available in multiple mounting options
Frames an area with continuous, even light
Suitable for shared areas and public interiors




SPACE 40 PRO Oval – Linear System

New


The **SPACE 40 PRO Oval** is an oval-shaped luminaire developed for balanced illumination in public and transitional spaces.
With an elongated form and a 40 mm light emission profile, it provides even light coverage across wider areas.
Available in pendant, surface-mounted and trim recessed versions, the luminaire adapts easily to different spatial layouts.
By delivering continuous, uniform light, SPACE 40 PRO Oval gently frames areas and supports visual balance in public interiors.

Pendant, Surface-Mounted, and Trim Recessed Mounting Options

Mountings:

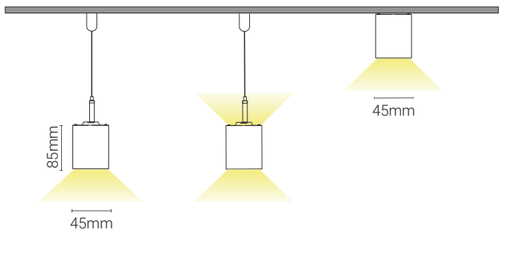

Pendant and Surface-Mounted



SPACE 40 PRO Oval – Pendant Direct Linear System


New



110° 105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- System Power: 28W ↓ 14W ↑ ; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓ 110° ↑
- Lumen Output: Up to 3700lm ↓ 1850lm ↑ System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

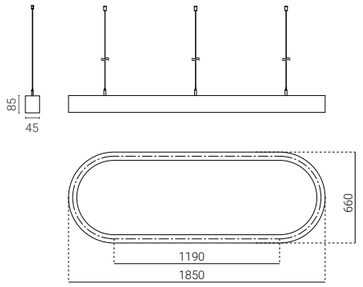

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W ↓ 12W ↑	28W ↓ 14W ↑	33V	1350mA	660mm	White	80	4000K	105° ↓ 110° ↑	3700lm ↓ ↑	SP40CCLR066P-840A0042F-WN-U

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CCL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CCLR066P Pendant 660mm	**830** CRI>80/ 3000K	**A0** 105° ↓ 110° ↑	**042** 042W	**F** On-Off	**W** White	**N** None	**U** Uplight
	840 CRI>80/ 4000K			**D** DALI Dim	**B** Black		

SPACE 40 PRO Oval – Pendant Direct Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct
- System Power: 28W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 3500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

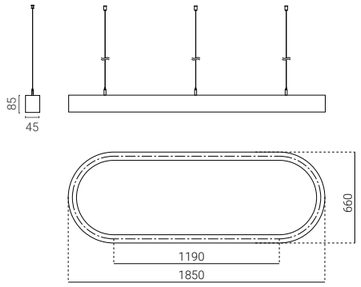

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	900mA	660mm	White	80	4000K	105° ↓	3500lm	SP40CCLR066P-840A0028F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CCL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CCLR066P Pendant 660mm	830 CRI>80/ 3000K	A0 105° ↓	028 28W	F On-Off	W White	N None	
	840 CRI>80/ 4000K			D DALI Dim	B Black		

SPACE 40 PRO Oval – Surface Mounted Linear System


New



105° | 3000K 4000K | CRI >80 | CRI >90 | IP20 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Surface Mounted
- System Power: 28W; CRI>80, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 105° ↓
- Lumen Output: Up to 3500lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

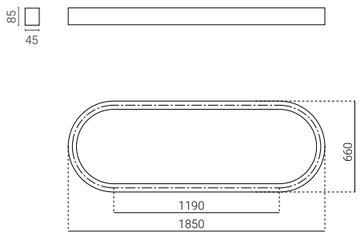

Light Distribution

4000K



Order Info

LED Power	System Power	LED Voltage	LED Current	Diameter	Color	CRI	CCT	Beam	System Output	Code
25W	28W	33V	900mA	660mm	White	80	4000K	105° ↓	3500lm	SP40CCLR066C-840A0028F-WN

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

SP40CCL – *** ** *** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
SP40CCLR066C Ceiling 660mm	830 CRI>80/ 3000K	A0 105° ↓	061 61W	F On-Off	W White	N None	
	840 CRI>80/ 4000K			D DALI Dim	B Black		

MODULINE 07

Ultra-Slim 7 mm Aperture
48V Modular Linear System
Seamless Ceiling Integration
Flexible Modular Configuration
Minimalist Architectural Design
Ideal for Residential & Retail Applications





Project: Application reference

New



MODULINE 07 – The Ultra-slim 48V Modular Linear System

New

1 Pendant H Track




2 Surface Mounted Track



3 EI Trimless Recessed Track



4 RE12 Trimless Recessed Track



New

Spotlight Inset



ML07-RS25PRO-3W



ML07-RS32PRO-8W



ML07-RS40PRO-12W



ML07-RS25-3W



ML07-RS32-4W



ML07-RS40-8W



ML07-AS68-6W



ML07-GS68-3W

Accent Light Inset



ML07-LA300-5W



ML07-LA600-10W



ML07-AA300-11W

General Light Inset



ML07-LG600-6W



ML07-LG900-9W

General Light Inset



ML07-GL2000-10W



ML07-GL3000-15W



ML07-GL4000-20W

Pendant Light Inset



ML07-RB80-3W



ML07-RA80-6W



ML07-RC80-6W

ML07-PB80-3W

ML07-PA80-6W

ML07-PC80-6W



ML07-PS25-1-3W



ML07-PS25-2-3W



ML07-PS25-3-3W




ML07-PS25-4-3W




ML07-PS25-5-3W


New








Moduline 07 Surface-mounted Track System



Surface-mounted Track Rail


L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Surface Mounted Track Rail	ML07-SM1000-B	ML07-SM1000-W
2000	Surface Mounted Track Rail	ML07-SM2000-B	ML07-SM2000-W
3000	Surface Mounted Track Rail	ML07-SM3000-B	ML07-SM3000-W
	Surface Mounted Curve Track Rail, Radius: 300mm,1/2 Circle	ML07-SM300-1/2-B	ML07-SM300-1/2-W
	Surface Mounted Curve Track Rail, Radius: 300mm,1/4 Circle	ML07-SM300-1/4-B	ML07-SM300-1/4-W


Accessories of Easy Installation Version Trimless Recessed Track System

	L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	50x50	Vertical 'L' shape corner module-Inner	ML07-SMLVC-B	ML07-SMLVC-W
	50x50	Horizontal 'L' shape corner module	ML07-SMLHC-B	ML07-SMLHC-W
		Flexible Continuous Kit, Electrical	ML07-CKF-B	ML07-CKF-W
		Endcap Kit (2pcs/ set) of Surface Mounted Track	ML07-SMEK-B	ML07-SMEK-W
		Power Feeder Unit with feeder cables 500mm	ML07-PF-B	ML07-PF-W
		Mechanical Linear Connector Kit with Wire Cover	ML07-LCC-B	ML07-LCC-W
	310x36	Driver Box, Fit with 100W 48V Driver Suitable for Concrete Ceiling	ML07-DB-B	ML07-DB-W


New





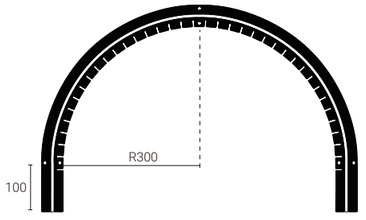

Moduline 07 Trimless Recessed Track System
Easy Installation Version



Trimless Recessed (Easy Installation Version) Track Rail


L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail-EI	ML07-TR1000-EI-B	ML07-TR1000-EI-W
2000	Trimless Recessed Track Rail-EI	ML07-TR2000-EI-B	ML07-TR2000-EI-W
3000	Trimless Recessed Track Rail-EI	ML07-TR3000-EI-B	ML07-TR3000-EI-W
	Trimless Recessed Curve Track Rail-EI, Radius: 300mm,1/2 Circle	ML07-TR300-EI-1/2-B	ML07-TR300-EI-1/2-W
	Trimless Recessed Curve Track Rail-EI, Radius: 300mm,1/4 Circle	ML07-TR300-EI-1/4-B	ML07-TR300-EI-1/4-W

Accessories of Easy Installation Version Trimless Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	50x50	(34x14)+34x14)	Vertical 'L' shape corner module-Inner	ML07-TRELVC-B	ML07-TRELVC-W
	60x60	(46x14)+(33x14)	Horizontal 'L' shape corner module	ML07-TRELHC-B	ML07-TRELHC-W
			Flexible Continuous Kit, Electrical	ML07-CKF-B	ML07-CKF-W
			Endcap Kit (2pcs/ set) of Trimless Recessed Track-EI	ML07-TREEK-B	ML07-TREEK-W
			Power Feeder Unit with feeder cables 500mm	ML07-PF-B	ML07-PF-W
			Mechanical Linear Connector Kit with Wire Cover	ML07-LCC-B	ML07-LCC-W

New





Moduline 07 RE12 Trimless Recessed Track System
12.5mm Ceiling Thickness Version

RE12 Trimless Recessed Track Rail


L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	RE12 Trimless Recessed Track Rail	ML07-TRF1000-B	ML07-TRF1000-W
2000	RE12 Trimless Recessed Track Rail	ML07-TRF2000-B	ML07-TRF2000-W
3000	RE12 Trimless Recessed Track Rail	ML07-TRF3000-B	ML07-TRF3000-W


Accessories of Trimless Recessed Track System-12.5mm


	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	50x50	(45x14)+(45x14)	Vertical 'L' shape corner module-Inner	ML07-TRFLVC-B	ML07-TRFLVC-W
	60x60	(46x14)+(33x14)	Horizontal 'L' shape corner module	ML07-TRFLHC-B	ML07-TRFLHC-W
			Flexible Continuous Kit, Electrical	ML07-CKF-B	ML07-CKF-W
			Endcap Kit (2pcs/ set) of RE12 Trimless Recessed Track	ML07-TRFEK-B	ML07-TRFEK-W
			Power Feeder Unit with feeder cables 500mm	ML07-PF-B	ML07-PF-W
			Mechanical Linear Connector Kit with Wire Cover	ML07-LCC-B	ML07-LCC-W

New









Moduline 07 Pendant H Track System

Pendant H Track System Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Pendant H Track Rail	ML07-HR1000-B	ML07-HR1000-W
2000	Pendant H Track Rail	ML07-HR2000-B	ML07-HR2000-W
3000	Pendant H Track Rail	ML07-HR3000-B	ML07-HR3000-W
Pendant H Curve Track Rail, Radius: 300mm,1/2 Circle		ML07-HR300-1/2-B	ML07-HR300-1/2-W
Pendant H Curve Track Rail, Radius: 300mm,1/4 Circle		ML07-HR300-1/4-B	ML07-HR300-1/4-W

Accessories of Pendant H Track System

	L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	70x70	Horizontal 'L' shape corner module	ML07-HRLHC-B	ML07-HRLHC-W
		Flexible Continuous Kit, Electrical	ML07-CKF-B	ML07-CKF-W
		Endcap Kit (2pcs/ set) of Pendant H Track	ML07-HREK-B	ML07-HREK-W
		Power Feeder Unit with feeder cables 2000mm	ML07-PF-P-B	ML07-PF-P-W
		Pendant H Track mounting kit 1set for 1000mm Track	ML07-PK-H-B	ML07-PK-H-W
		Pendant H Track wire kit 1set for 1000mm Track	ML07-PWK-B	ML07-PWK-W
		H Track Linear Connector (Mechanical Connection)	ML07-HRLC	ML07-HRLC
	310x36	Driver Box, Fit with 100W 48V Driver Suitable for Concrete Ceiling	ML07-DB-B	ML07-DB-W



MODULINE 07 – ML07-RS25PRO Spotlight Inset

New




24° 36° 45° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info

- System: 3W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 270lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



White



Black

Coding

MMR4	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MMR4 ML07-RS25PRO Single Spot		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	24 24° 36 36° 45 45°	03 3W	F On-Off D DALI Dim		W White B Black	B Black		H Honeycomb

Optional accessory



Code for MMR4-9304503F-BB with Honeycomb
MMR4-9304503F-BB-H

Honeycomb

MODULINE 07 – ML07-RS32PRO Spotlight Inset

New




24° 36° 45° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info

- System: 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



White Black

Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMR4	927	24	08	F	W	B	H
ML07-RS32 Single Spot	CRI>90/ 2700K	24°	8W	On-Off	White	Black	Honeycomb
	930	36		D	B		
	CRI>90/ 3000K	36°		DALI Dim	Black		
	940	45					
	CRI>90/ 4000K	45°					

Optional accessory



Code for MMR5-9304508F-BB with Honeycomb
MMR5-9304508F-BB-H

Honeycomb

MODULINE 07 – ML07-RS40PRO Spotlight Inset

New




24° 36° 45° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info

- System: 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



White Black

Coding

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMR6	927	24	12	F	W	B	H
ML07-RS40PRO Single Spot	CRI>90/ 2700K	24°	12W	On-Off	White	Black	Honeycomb
	930	36		D	B		
	CRI>90/ 3000K	36°		DALI Dim	Black		
	940	45					
	CRI>90/ 4000K	45°					

Optional accessory



Code for MMR6-9304512F-BB with Honeycomb
MMR6-9304512F-BB-H

Honeycomb



MODULINE 07 – ML07-RS25 Spotlight Inset

New




18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info


- System: 3W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 190lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, DALI Dim




Light Distribution

3000K







Finish



White



Black

Order Info (ML07-RS25 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	18°	220lm	170lm	MMR1-9271803F-BB
					30°	220lm	170lm	MMR1-9273003F-BB
					45°	220lm	170lm	MMR1-9274503F-BB
				3000K	18°	230lm	180lm	MMR1-9301803F-BB
					30°	230lm	180lm	MMR1-9303003F-BB
					45°	230lm	180lm	MMR1-9304503F-BB
				4000K	18°	250lm	190lm	MMR1-9401803F-BB
					30°	250lm	190lm	MMR1-9403003F-BB
					45°	250lm	190lm	MMR1-9404503F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Optional accessory



Code for MMR1-9301803F-BB with Honeycomb
MMR1-9301803F-BB-H

Honeycomb

Coding

MMR1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMR1 ML07-RS25-3W Single Spot	927 CRI>90/ 2700K	18 18°	03 3W	F On-Off	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	30 30°		D DALI Dim	B Black		
	940 CRI>90/ 4000K	45 45°					

MODULINE 07 – ML07-RS32 Spotlight Inset

New



18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 280lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

Light Distribution

3000K

Finish



White Black

Order Info (ML07-RS32 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
3.5W	4W	48V	90	2700K	18°	370lm	250lm	MMR2-9271804F-BB
					36°	370lm	250lm	MMR2-9273604F-BB
					50°	370lm	250lm	MMR2-9275004F-BB
				3000K	18°	400lm	260lm	MMR2-9301804F-BB
					36°	400lm	260lm	MMR2-9303604F-BB
					50°	400lm	260lm	MMR2-9305004F-BB
				4000K	18°	440lm	280lm	MMR2-9401804F-BB
					36°	440lm	280lm	MMR2-9403604F-BB
					50°	440lm	280lm	MMR2-9405004F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Optional accessory



Code for MMR2-9301804F-BB with Honeycomb
MMR2-9301804F-BB-H

Honeycomb

Coding

MMR2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMR2 ML07-RS32 Single Spot	927 CRI>90/ 2700K	18 18°	04 4W	F On-Off	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	36 36°		D DALI Dim	B Black		
	940 CRI>90/ 4000K	50 50°					

MODULINE 07 – ML07-RS40 Spotlight Inset


New



18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 8W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 820lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, DALI Dim



Light Distribution

3000K

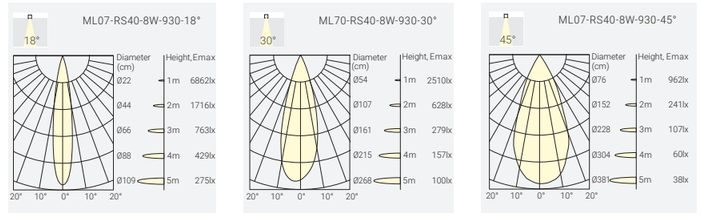

Finish



White Black

Order Info (ML07-RS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48V	90	2700K	18°	1000lm	700lm	MMR3 -9271808F-BB
					30°	1000lm	750lm	MMR3 -9273008F-BB
					45°	1000lm	500lm	MMR3 -9274508F-BB
				3000K	18°	1100lm	730lm	MMR3 -9301808F-BB
					30°	1100lm	800lm	MMR3 -9303008F-BB
					45°	1100lm	530lm	MMR3 -9304508F-BB
				4000K	18°	1200lm	760lm	MMR3 -9401808F-BB
					30°	1200lm	820lm	MMR3 -9403008F-BB
					45°	1200lm	550lm	MMR3 -9404508F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Optional accessory



Code for MMR3-9301808F-BB with Honeycomb
MMR3-9301808F-BB-H

Honeycomb

Coding

MMR3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMR3 ML07-RS40-8W Single Spot	927 CRI>90/ 2700K	18 18°	08 8W	F On-Off	W White	B Black	H Honeycomb
	930 CRI>90/ 3000K	30 30°		D DALI Dim	B Black		
	940 CRI>90/ 4000K	45 45°					

MODULINE 07 – ML07-AS68 Round Accent Light Spot Inset

New




36° 50° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA Intertek 5 YEARS GUARANTEE

Quick Info

- System: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 36°, 50°
- Lumen Output: Up to 700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



White



Black

Coding

MMAS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMAS ML07-AS68 Accent Light Spot	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**36** 36° **50** 50°	**06** 6W	**F** On-Off **D** DALI Dim	**W** White **B** Black	**B** Black	**H** Honeycomb

MODULINE 07 – ML07-GS68 Round General Light Spot Inset

New




100° 2700K 3000K 4000K CRI >90 48V DC

IP20 CE CB UKCA Intertek 5 YEARS GUARANTEE

Quick Info

- System: 3W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 100°
- Lumen Output: Up to 200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



White



Black

Coding

MMGS – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMGS ML07-GS68 General Light Spot	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**A0** 100°	**03** 3W	**F** On-Off **D** DALI Dim	**W** White **B** Black	**N** None	



MODULINE 07 – ML07-LA300 & ML07-LA600 Slim Version Accent Light Inset


New



50° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 5W, 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 50°
- Lumen Output: Up to 350lm or 700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



Black

Coding

MMLA	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MMLA ML07-LA300-5W ML07-LA600-10W Slim Version Accent Light		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	50 50°	05 5W 10 10W	F On-Off D DALI Dim		B Black	M Matt		

MODULINE 07 – ML07-AA300 Adjustable Accentl Light Inset


New



40° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 11W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 40°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



White




Black

Coding

MMAA	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MMAA ML07-AA300 Adjustable Accentl Light		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	40 40°	11 11W	F On-Off D DALI Dim		W White B Black	N None		

MODULINE 07 – ML07-LG600 & ML07-LG900 Slim Version General Light Inset







Quick Info

- System: 6W, 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 400lm or 650lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

Finish





Black


Coding

MMLG	–	***	**	**	*	–	*	*	–	*

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMLG ML07-LG600-6W ML07-LG900-9W Slim Version General Light	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**A1** 110°	**06** 6W **09** 9W	**F** On-Off **D** DALI Dim	**B** Black	**N** None	

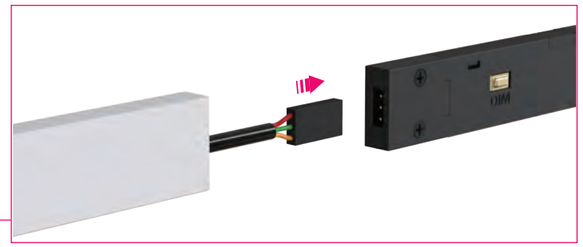

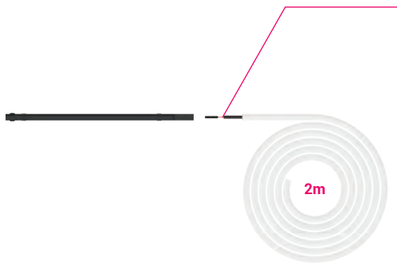

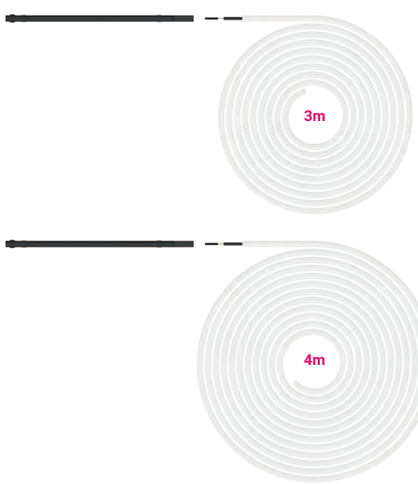




New





Black



110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 10W, 15W, 20W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 500lm or 750lm or 1000lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

Finish

Coding

MMG2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMG2 ML07-GL2000-10W 2000mm	**927** CRI>90/ 2700K	**A1** 110°	**10** 10W	**F** On-Off	**B** Black	**N** None	
MMG3 ML07-GL3000-15W 3000mm	**930** CRI>90/ 3000K		**15** 15W	**D** DALI Dim			
MMG4 ML07-GL4000-20W 4000mm	**940** CRI>90/ 4000K		**20** 20W				

MODULINE 07 – ML07-RA80 Decorative Ball Inset

New




180° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 180°
- Lumen Output: Up to 300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



Black

Chrome

Coding

MMRA – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMRA ML07-RA80 Decorative Ball	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A8 180°	06 6W	F On-Off D DALI Dim	B Black C Chrome	N None	

MODULINE 07 – ML07-RC80 Decorative Ball Inset

New




180° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 180°
- Lumen Output: Up to 300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



Black



Chrome

Coding

MMRC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMRC ML07-RC80 Decorative Ball	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A8 180°	06 6W	F On-Off D DALI Dim	B Black C Chrome	N None	

MODULINE 07 – ML07-RB80 Decorative Ball Inset


New



360° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 3W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim





Finish

Coding

MMRB	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MMRB ML07-RB80 Decorative Ball		**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**C6** 360°	**03** 3W	**F** On-Off **D** DALI Dim		**W** White **B** Black	**N** None		

MODULINE 07 – ML07-PB80 Pendant Decorative Ball Inset


New



360° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 3W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 220lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim





Finish

Coding

MMPB	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MMPB ML07-PB80 Pendant Decorative Ball		**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**C6** 360°	**03** 3W	**F** On-Off **D** DALI Dim		**W** White **B** Black	**N** None		

MODULINE 07 – ML07-PA80 Pendant Decorative Ball Inset

New




180° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 180°
- Lumen Output: Up to 300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



Black Chrome

Coding

MMPA	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MMPA ML07-PA80 Pendant Decorative Ball		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A8 180°	06 6W	F On-Off D DALI Dim		B Black C Chrome	N None		

MODULINE 07 – ML07-PC80 Pendant Decorative Ball Inset

New




180° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | 5 YEARS GUARANTEE

Quick Info

- System: 6W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 180°
- Lumen Output: Up to 300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish




Black Chrome

Coding

MMPC	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MMPC ML07-PC80 Pendant Decorative Ball		927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A8 180°	06 6W	F On-Off D DALI Dim		B Black C Chrome	N None		

MODULINE 07 – ML07-PS25 Pendant Spot Inset

New




24° 36° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- System: 3W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 350lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Finish



White Black

Coding

MMP1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMP1 ML07-PS25-1 Pendant Spot 100mm	**927** CRI>90/ 2700K	**24** 24°	**03** 3W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MMP2 ML07-PS25-2 Pendant Spot 200mm	**930** CRI>90/ 3000K	**36** 36°		**D** DALI Dim	**B** Black		
MMP3 ML07-PS25-3 Pendant Spot 300mm	**940** CRI>90/ 4000K	**45** 45°					

MODULINE 07 – ML07-PS25 Pendant Decorative Spot Inset

New




24° 36° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- System: 3W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 45°
- Lumen Output: Up to 350lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

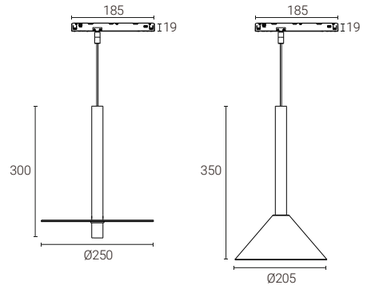

Finish



White White



Black Black


Coding

MMP4 – *** ** ** * – * * – *


Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MMP4 ML07-PS25-4 Flat Round Shape	**927** CRI>90/ 2700K	**24** 24°	**03** 3W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
MMP5 ML07-PS25-5 Cone Shape	**930** CRI>90/ 3000K	**36** 36°		**D** DALI Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**45** 45°					

MODULINE 07 – Side Light Track System


New

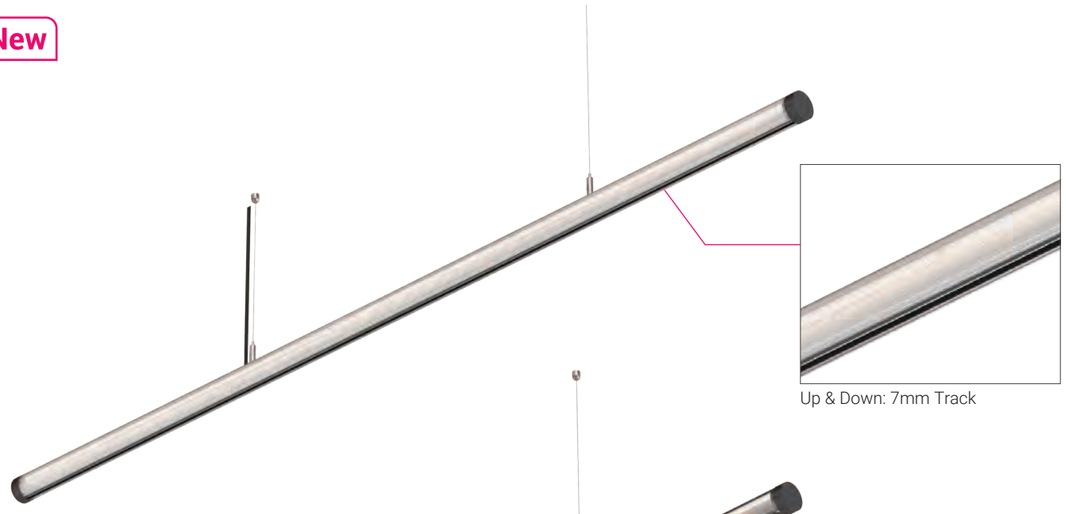


Up & Down: 7mm Track

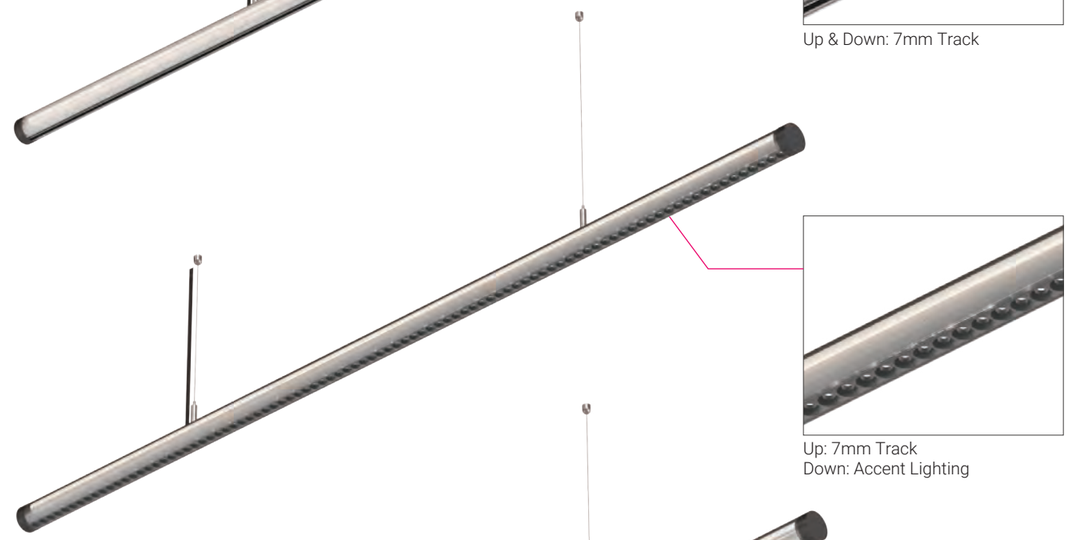



Up: 7mm Track
Down: Accent Lighting

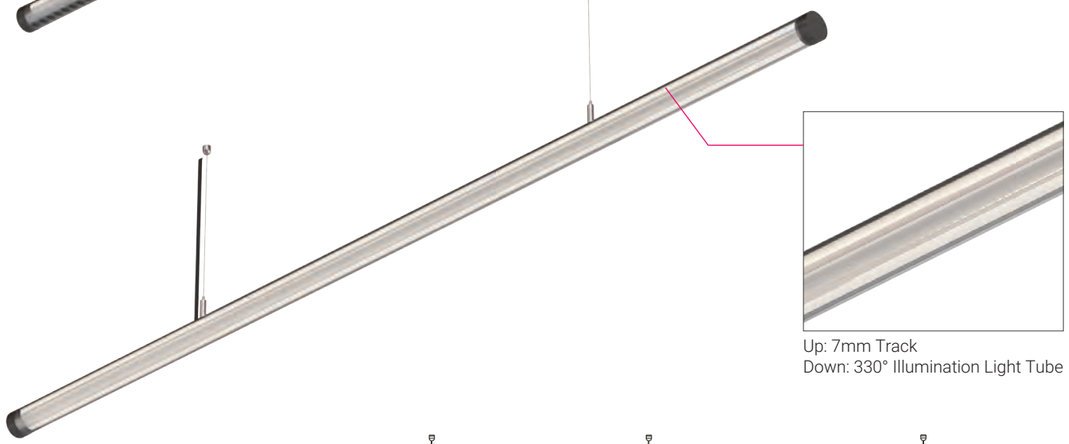

Up: 7mm Track
Down: 330° Illumination Light Tube

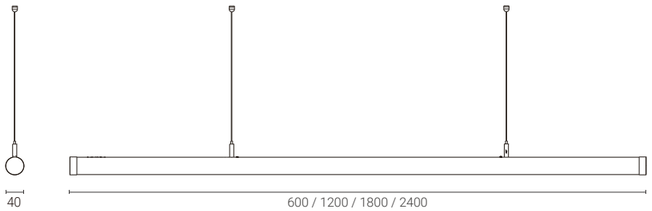


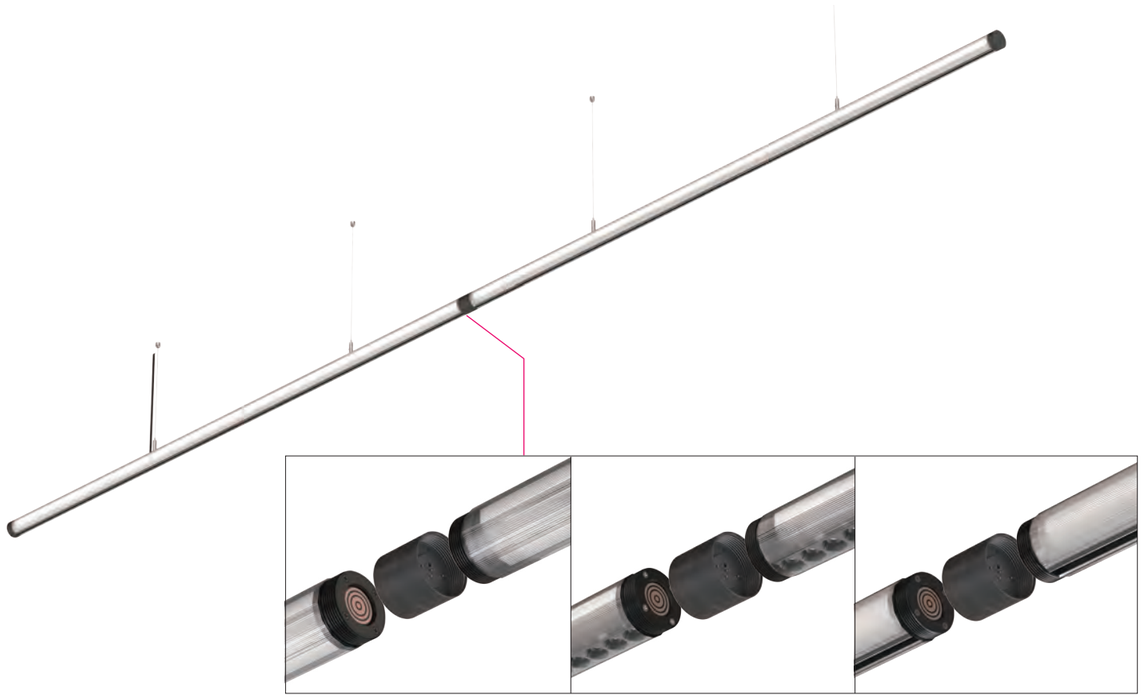

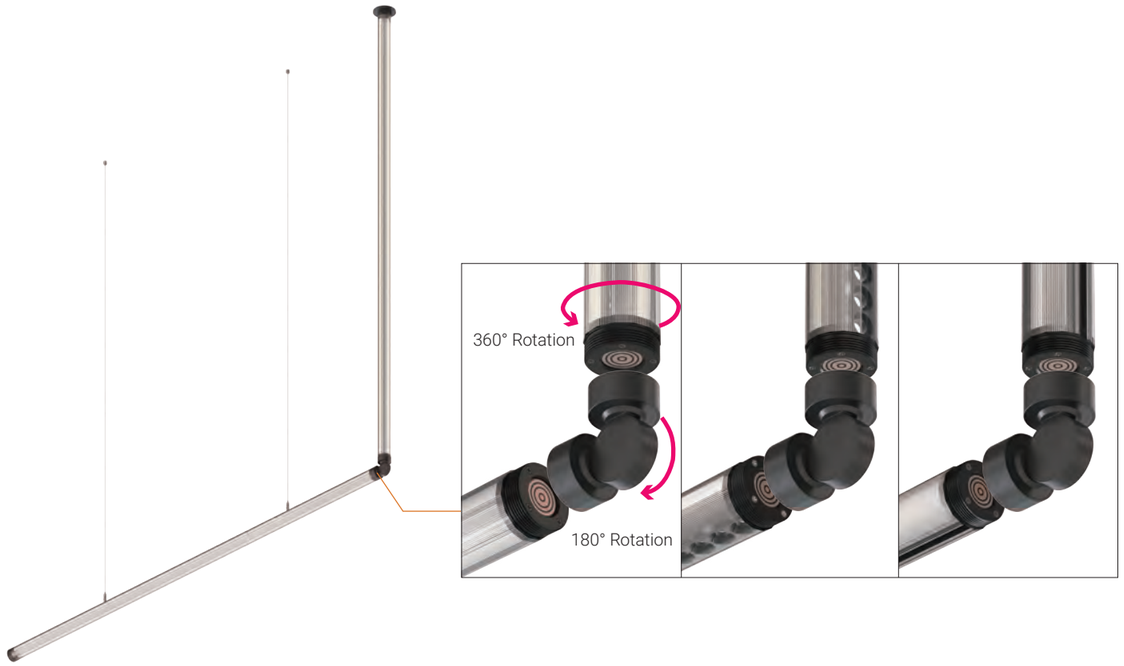


MODULINE 07 – Side Light Track System-Up & Down Track Version

New

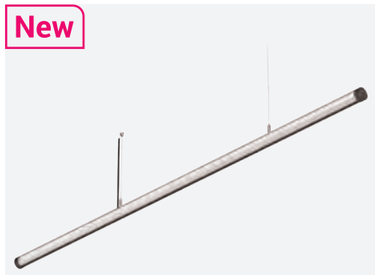



Up & Down: 7mm Track

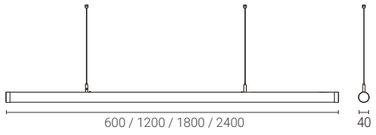

Moduline 07 Side Light System-Up & Down Track Version

Track Rail


L (mm)	Description	Code/ Model (ON-OFF Version)	Code/ Model (DALI Dim Version)
600	Side Light Track Rail, Up & Down Track Version	ML07-SLRU600-B	ML07-SLRU600D-B
1200	Side Light Track Rail, Up & Down Track Version	ML07-SLRU1200-B	ML07-SLRU1200D-B
1800	Side Light Track Rail, Up & Down Track Version	ML07-SLRU1800-B	ML07-SLRU1800D-B
2400	Side Light Track Rail, Up & Down Track Version	ML07-SLRU2400-B	ML07-SLRU2400D-B


Accessories of Side Light System

	L (mm)	Description	Code/ Model (Black-Standard)
	36x40	Linear Connector(Mechanical & Electrical Connection)	ML07-SLRSC-B
	61x61	Flexible Connector(Mechanical & Electrical Connection)	ML07-SLRFC-B
	40x15	Endcap Kit (2pcs/ set) of Side Light Track	ML07-SLREC-B
	67x22	Side Light Track Ceiling Mounted Base	ML07-SLRCM-B
		Pendant H Track mounting kit with Ceiling Box	ML07-PK-H-B
		Pendant H Track wire kit 1set for 1000mm Track	ML07-PWK-H-B
	310x36	Driver Box, Fit with 100W 48V Driver Suitable for Concrete Ceiling	ML07-DB-B


MODULINE 07 – Side Light Track System-Accent Light Version

New

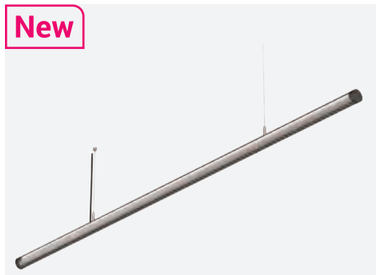



Up: 7mm Track
Down: Accent Light

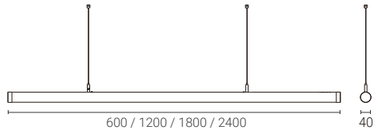

Moduline 07 Side Light Track System-Accent Light Version

Track Rail

L (mm)	Description	Code/ Model (ON-OFF Version)	Code/ Model (DALI Dim Version)
600	Side Light Track System, Accent Light Version	ML07-SLRA600-B	ML07-SLRA600D-B
1200	Side Light Track System, Accent Light Version	ML07-SLRA1200-B	ML07-SLRA1200D-B
1800	Side Light Track System, Accent Light Version	ML07-SLRA1800-B	ML07-SLRA1800D-B
2400	Side Light Track System, Accent Light Version	ML07-SLRA2400-B	ML07-SLRA2400D-B


Accessories of Side Light System

	L (mm)	Description	Code/ Model (Black-Standard)
	36x40	Linear Connector(Mechanical & Electrical Connection)	ML07-SLRSC-B
	61x61	Flexible Connector(Mechanical & Electrical Connection)	ML07-SLRFC-B
	40x15	Endcap Kit (2pcs/ set) of Side Light Track	ML07-SLREC-B
	67x22	Side Light Track Ceiling Mounted Base	ML07-SLRCM-B
		Pendant H Track mounting kit with Ceiling Box	ML07-PK-H-B
		Pendant H Track wire kit 1set for 1000mm Track	ML07-PWK-H-B
	310x36	Driver Box, Fit with 100W 48V Driver Suitable for Concrete Ceiling	ML07-DB-B




MODULINE 07 – Side Light Track System-Light Tube Version

New

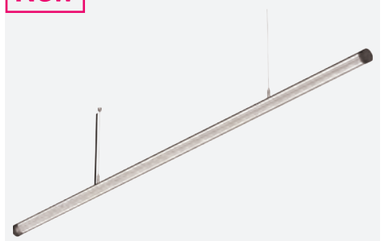



Up: 7mm Track
Down: 330° Illumination Light Tube

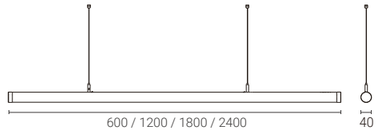

Moduline 07 Side Light Track System-Light Tube Version

Track Rail

L (mm)	Description	Code/ Model (ON-OFF Version)	Code/ Model (DALI Dim Version)
600	Side Light Track System, Light Tube Version	ML07-SLRC600-B	ML07-SLRC600D-B
1200	Side Light Track System, Light Tube Version	ML07-SLRC1200-B	ML07-SLRC1200D-B
1800	Side Light Track System, Light Tube Version	ML07-SLRC1800-B	ML07-SLRC1800D-B
2400	Side Light Track System, Light Tube Version	ML07-SLRC2400-B	ML07-SLRC2400D-B

Accessories of Side Light System

	L (mm)	Description	Code/ Model (Black-Standard)
	36x40	Linear Connector(Mechanical & Electrical Connection)	ML07-SLRSC-B
	61x61	Flexible Connector(Mechanical & Electrical Connection)	ML07-SLRFC-B
	40x15	Endcap Kit (2pcs/ set) of Side Light Track	ML07-SLREC-B
	67x22	Side Light Track Ceiling Mounted Base	ML07-SLRCM-B
		Pendant H Track mounting kit with Ceiling Box	ML07-PK-H-B
		Pendant H Track wire kit 1set for 1000mm Track	ML07-PWK-H-B
	310x36	Driver Box, Fit with 100W 48V Driver Suitable for Concrete Ceiling	ML07-DB-B

MODULINE 26

48V Low Voltage Modular Linear Track System
Multiple Light Insets & Track Configurations




Project: Amos Rex, Helsinki, Finland




MODULINE 26 – 48V Low Voltage Modular Linear System

1 H Track




2 Standard Track



3 Slim Track



4 Trim Recessed Track



5 Trimless Recessed Track-EI



6 Trimless Recessed Track



MODULINE 26 – 48V Low Voltage Modular Linear System

Spotlight Inset



ML26-RS25-3W



ML26-RS25-5W



ML26-RS40-8W



ML26-RS40-16W



ML26-RS40-12W



ML26-RS40-24W



ML26-RS55-14W



ML26-RT55-10W



ML26-RS72-19W
ML26-RS72-26W



ML26-FRS72-10W



ML26-FRS72-20W



ML26-RS96-9W



ML26-RB120-5W
ML26-RB150-7W



ML26-FRD80-10W



ML26-FSD80-10W



ML26-FRDH80-10W



ML26-FSDH80-10W

Accent Light Inset



New

ML26-LA240-13W
ML26-LA470-26W



ML26-AL190-3W
ML26-AL190-7W



ML26-AL280-9W



ML26-AL560-26W



ML26-SA280-13W

General Light Inset



New

ML26-LG470-13W
ML26-LG700-19W
ML26-LG925-26W



ML26-CL280-7W/ 10W
ML26-CL560-13W/ 19W
ML26-CL840-19W/ 26W
ML26-CL1120-26W



ML26-GL280-7W/ 10W
ML26-GL560-13W/ 19W
ML26-GL840-19W/ 26W
ML26-GL1120-26W



ML26-SG280-7W/ 10W



ML26-WW280-7W
ML26-WW560-13W

Pendant Light Inset



ML26-PS60-5W



ML26-PB120-5W
ML26-PB150-7W



ML26-PS40-12W



ML26-PS55-10W



ML26-NHP10-14W




ML26-NHU12-19W



ML26-NVP12-19W

MODULINE 26 – 48V Low Voltage Modular Linear System

Slim Track Configuration

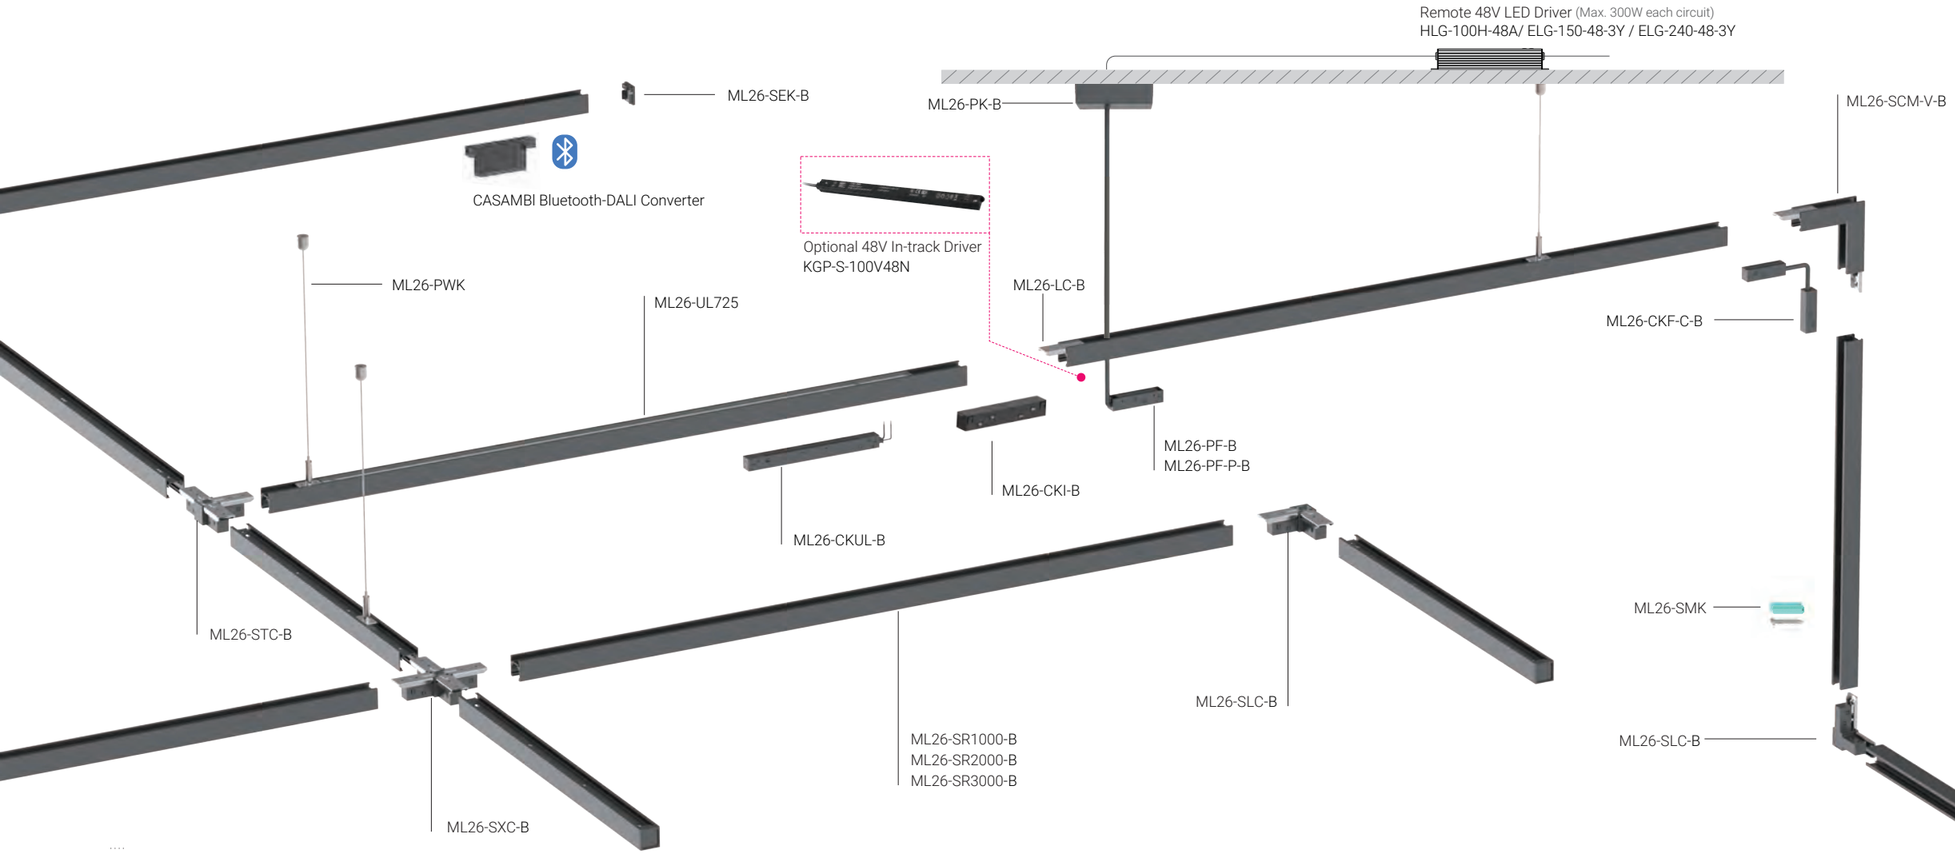

Short Info

- 48V low voltage system
- Slim Track Rail made of extruded aluminium with 26mm width groove and 27mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 0-10V Dim and DALI Dim

Moduline 26 Slim Track System

Slim Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 27mm	ML26-SR1000-B	ML26-SR1000-W
L x W x H : 2000 x 26 x 27mm	ML26-SR2000-B	ML26-SR2000-W
L x W x H : 3000 x 26 x 27mm	ML26-SR3000-B	ML26-SR3000-W

*Track Rail including endcaps.

Accessories of Slim Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-SCM-V-B	ML26-SCM-V-W
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-SCM-V-O-B	ML26-SCM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-SLC-B	ML26-SLC-W
'T' Shape Connector Set, 26 x 26mm	ML26-STC-B	ML26-STC-W
'X' Shape Connector Set, 26 x 26mm	ML26-SXC-B	ML26-SXC-W
Endcap Kit (2pcs/ set) of Slim Track Rail	ML26-SEK-B	ML26-SEK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC-B	ML26-LC-W
Straight Continuous Kit	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Slim Version, Black	KGP-S-100V48N	
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y	
CASAMBI Bluetooth-DALI Converter	ML26-CBDC-B	

*Continuous Kit needs to be used together with Linear Connector as a set.

Insets

Spotlight



Accent Light



General Light



Wall Wash Light




Pendant Spotlight



* Check details of light insets at following pages


MODULINE 26 – 48V Low Voltage Modular Linear System

Standard Track Configuration

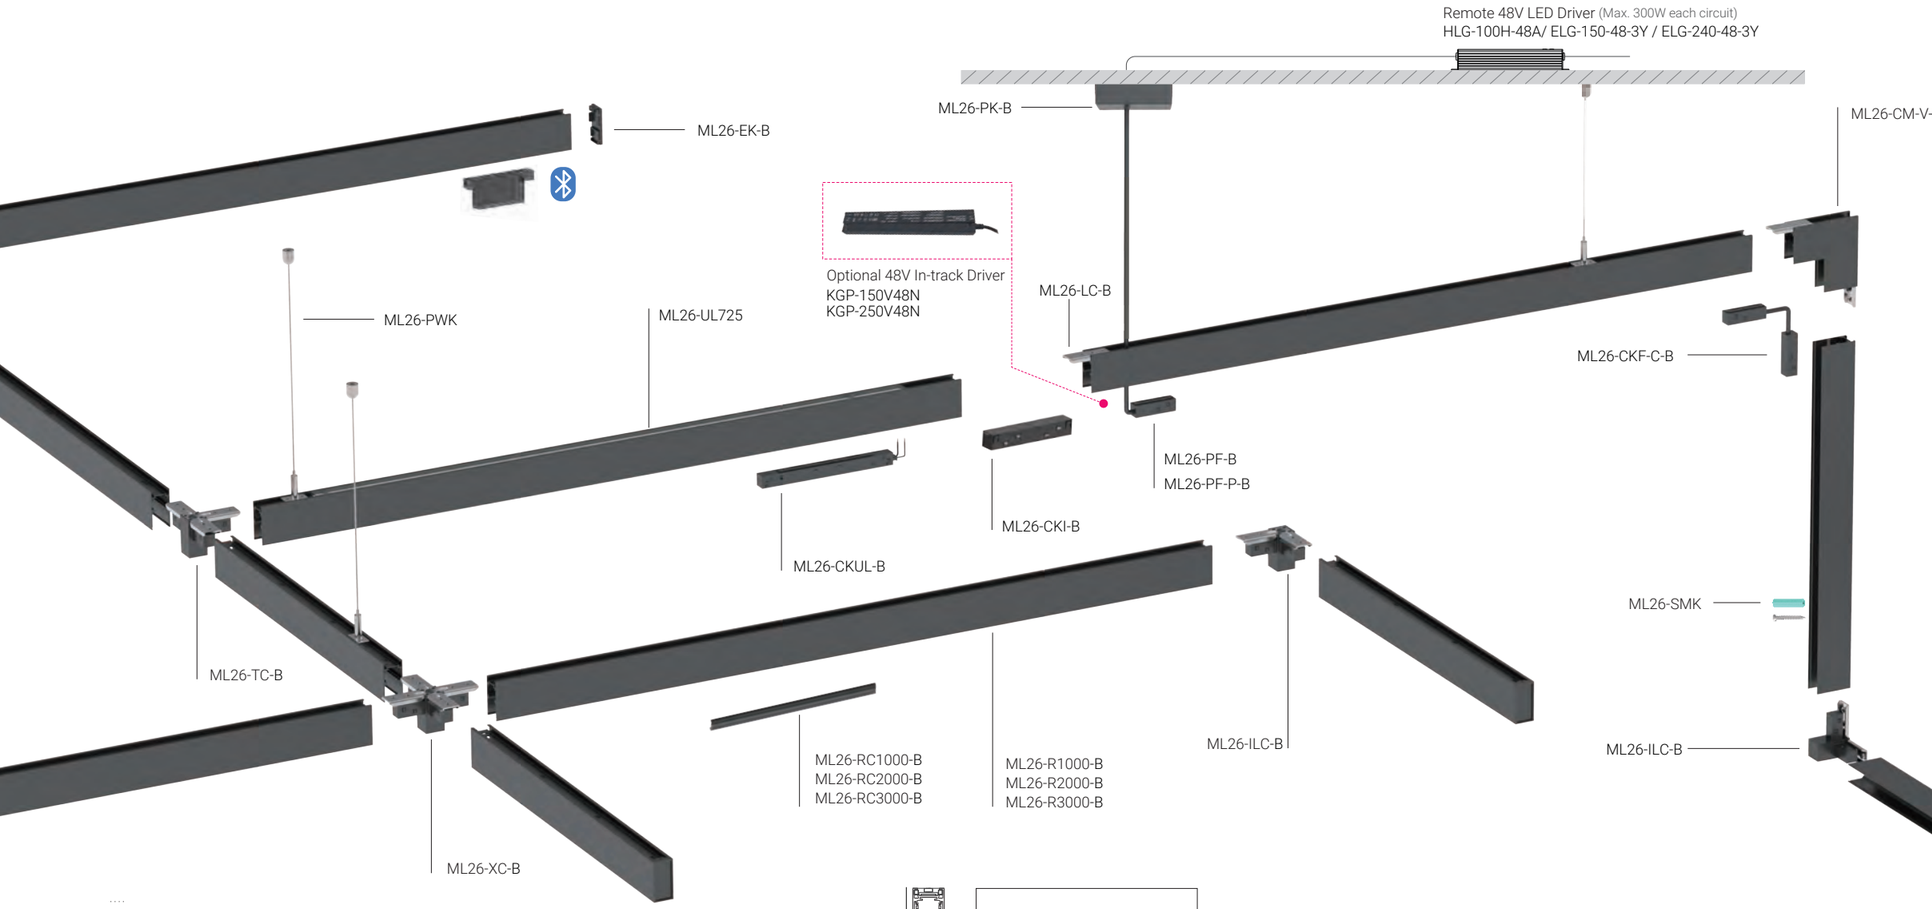

Short Info

- 48V low voltage system
- Standard Track Rail made of extruded aluminium with 26mm width groove and 52mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- 'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 0-10V Dim and DALI Dim



Moduline 26 Standard Track System

Standard Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 52mm	ML26-R1000-B	ML26-R1000-W
L x W x H : 2000 x 26 x 52mm	ML26-R2000-B	ML26-R2000-W
L x W x H : 3000 x 26 x 52mm	ML26-R3000-B	ML26-R3000-W

*Track Rail including endcaps.

Accessories of Standard Track System

Vertical 'L' Shape Corner Module-Inner, 80 x 80mm	ML26-CM-V-B	ML26-CM-V-W
Vertical 'L' Shape Corner Module-Outer, 80 x 80mm	ML26-CM-V-O-B	ML26-CM-V-O-W
'L' Shape Connector Set, 26 x 26mm	ML26-ILC-B	ML26-ILC-W
'T' Shape Connector Set, 26 x 26mm	ML26-TC-B	ML26-TC-W
'X' Shape Connector Set, 26 x 26mm	ML26-XC-B	ML26-XC-W
Endcap Kit (2pcs/ set) of Standard Track System	ML26-EK-B	ML26-EK-W
Power Feeder Unit with feeder cables 500mm for surface mounted	ML26-PF-B	ML26-PF-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Linear Connector with screws	ML26-LC-B	ML26-LC-W
Straight Continuous Kit	ML26-CKI-B	ML26-CKI-W
Flexible Continuous Kit	ML26-CKF-C-B	ML26-CKF-C-W
Surface mounted installation kit, 1set for 1000mm track	ML26-SMK	ML26-SMK
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 2pcs Pendant Wire (2000mm) Kits	ML26-PK-B	ML26-PK-W
Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK	ML26-PWK
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y	
CASAMBI Bluetooth-DALI Converter	ML26-CBDC-B	

*Continuous Kit needs to be used together with Linear Connector as a set.


Insets



* Check details of light insets at following pages


MODULINE 26 – 48V Low Voltage Modular Linear System

H Track Configuration

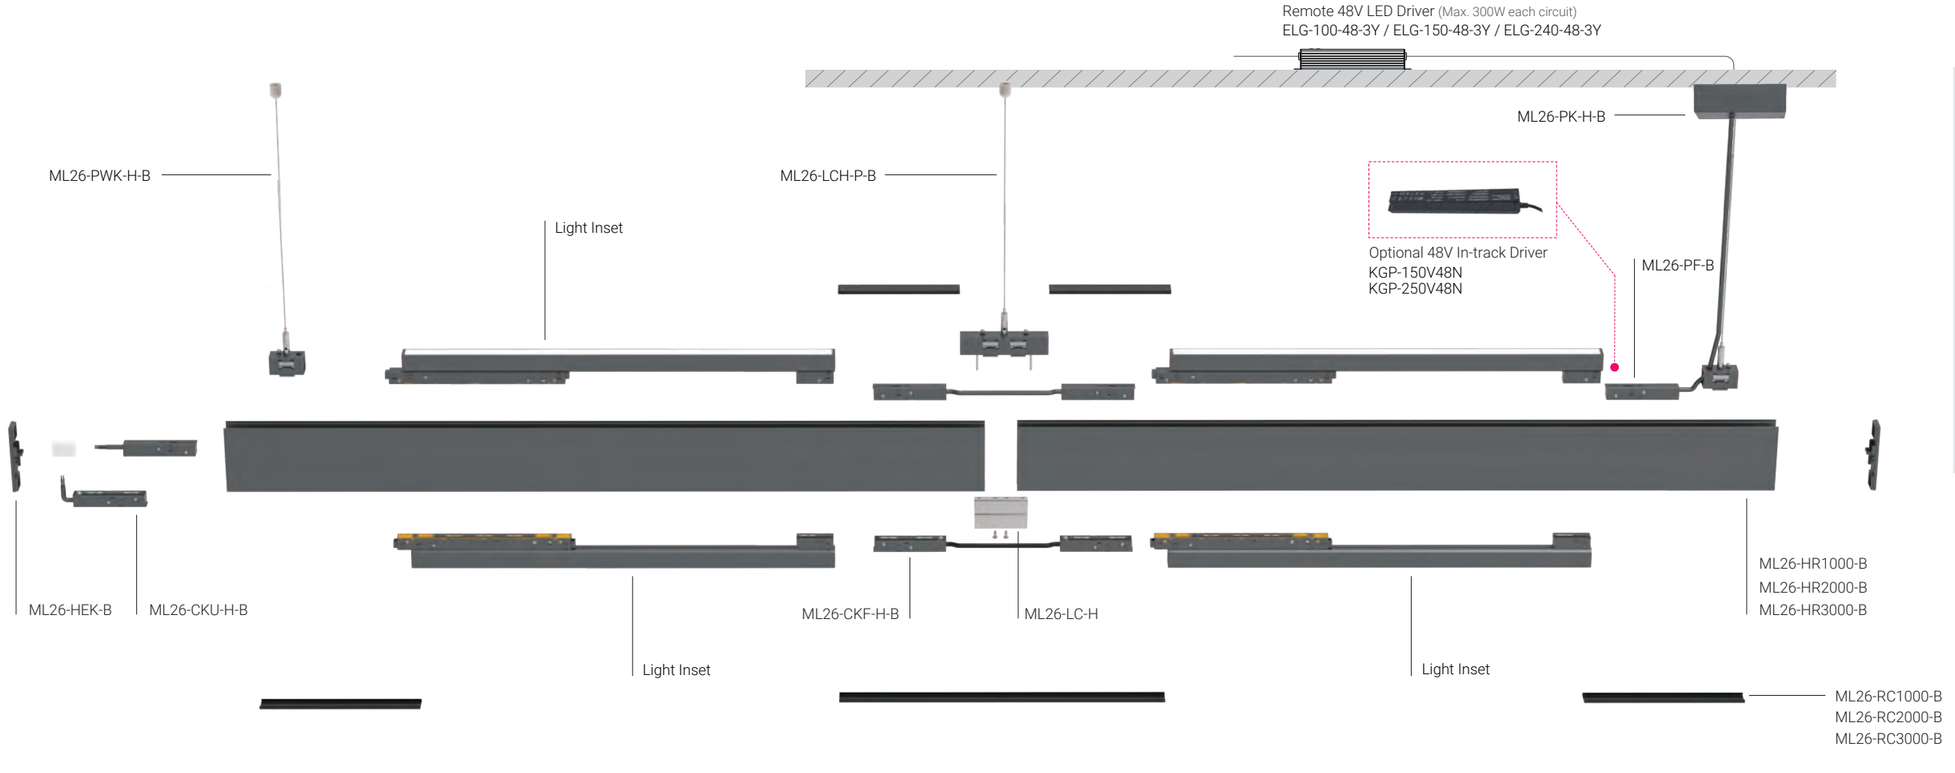

Short Info

- 48V low voltage system
- H Track Rail made of extruded aluminium with 26mm width groove and 90mm height
- Suitable for surface mounted or suspended with 2000mm steel cable
- Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
- Linear Connector and Continuous Kit provided for continuous Track Rail connection
- Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
- Insets available with Non Dim, 0-10V Dim and DALI Dim



Moduline 26 H Track System

H Track System Installation Track Rail | for surface or pendant mounting

Tracks can be shortened on site	Code/ Model (Black-Standard)	Code/ Model (White-Option)
L x W x H : 1000 x 26 x 90mm	ML26-HR1000-B	ML26-HR1000-W
L x W x H : 2000 x 26 x 90mm	ML26-HR2000-B	ML26-HR2000-W
L x W x H : 3000 x 26 x 90mm	ML26-HR3000-B	ML26-HR3000-W

*Track Rail including endcaps.

Accessories of H Track System

Endcap Kit (2pcs/ set) of H Track Rail	ML26-HEK-B	ML26-HEK-W
Power Feeder Unit with feeder cables 2000mm for pendant	ML26-PF-P-B	ML26-PF-P-W
Flexible Continuous Kit, Electrical, for Up Track and Down Track connection	ML26-CKU-H-B	ML26-CKU-H-W
Flexible Continuous Kit, Electrical, for straight connection	ML26-CKF-H-B	ML26-CKF-H-W
Linear Connector with Pendant Kit of H Track System	ML26-LCH-P-B	ML26-LCH-P-W
Linear Connector Kit of H Track System	ML26-LC-H	ML26-LC-H
Moduline 26 Pendant Installation Kits, with 1pcs Ceiling Box & 1pcs H Track Pendant Wire (2000mm) Kits	ML26-PK-H-B	ML26-PK-H-W
H Track Pendant Wire Kit, Wire in 2000mm Length, 2pcs/ set for 1000mm Track	ML26-PWK-H-B	ML26-PWK-H-W
Track Rail Cover 1000mm/2000mm/3000mm, can be shortened at site	ML26-RC1000-B	ML26-RC1000-W
48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y	
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y	
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y	

*Linear Connector Kit needs to be used together with Linear Connector with Pendant Kit

Insets




* Check details of light insets at following pages


MODULINE 26 – 48V Low Voltage Modular Linear System




Slim Track

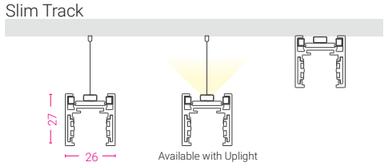


Standard Track

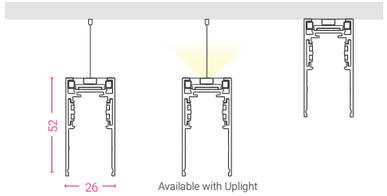


Trim Recessed Track




Trimless Recessed Track-EI




Trimless Recessed Track

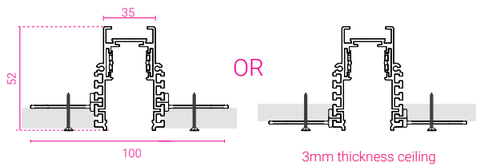


5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings




H Track



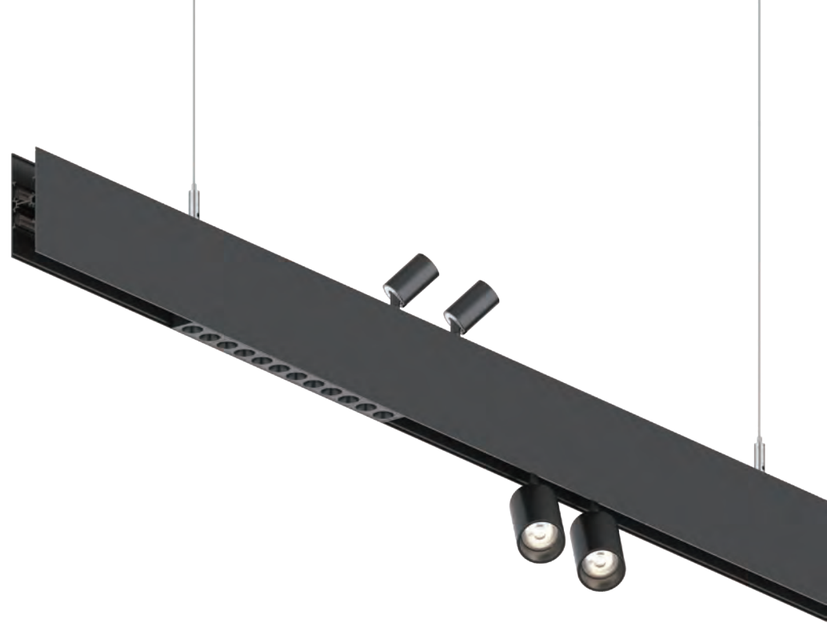

Installations

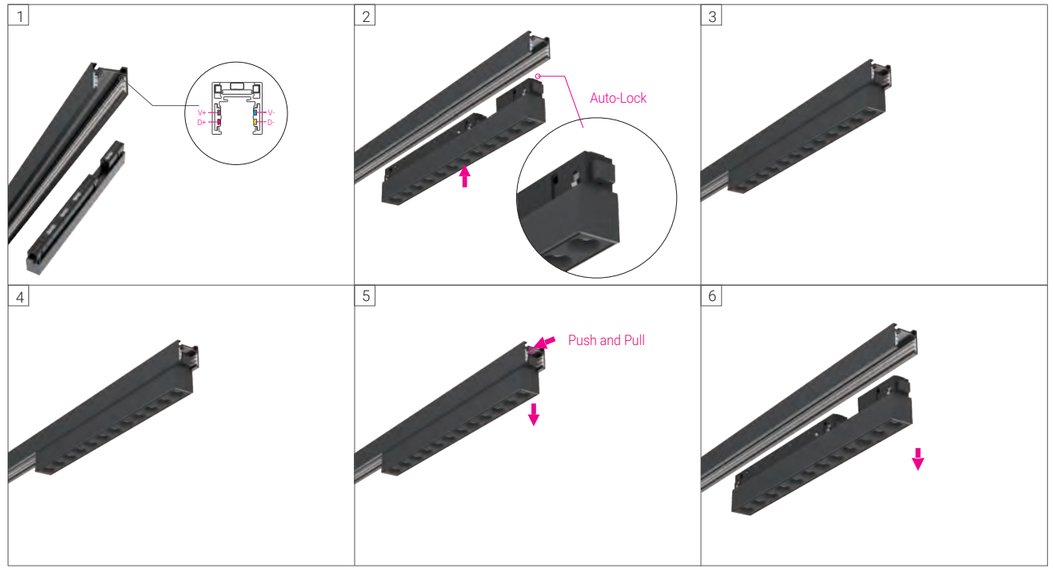


* Tool-free insert mounted by mechanical click-in locking mechanism

MODULINE 26 – 48V Low Voltage Modular Linear System


Recessed Track Configuration

1




ML26-FCM-V (Trim)
ML26-TCM-V (Trimless)
ML26-TCM-EI-V (Trimless-EI)

2




ML26-FTC (Trim)
ML26-TTC (Trimless)
ML26-TTC-EI (Trimless-EI)

3




ML26-FXC (Trim)
ML26-TXC (Trimless)
ML26-TXC-EI (Trimless-EI)

4



ML26-FCM (Trim)
ML26-TCM (Trimless)
ML26-TCM-EI (Trimless-EI)

5



ML26-FCM-O (Trim)
ML26-TCM-O (Trimless)
ML26-TCM-EI-O (Trimless-EI)


6



ML26-CKI + ML26-LC

MODULINE 26 – 48V Low Voltage Modular Linear System

Trim Recessed Track System

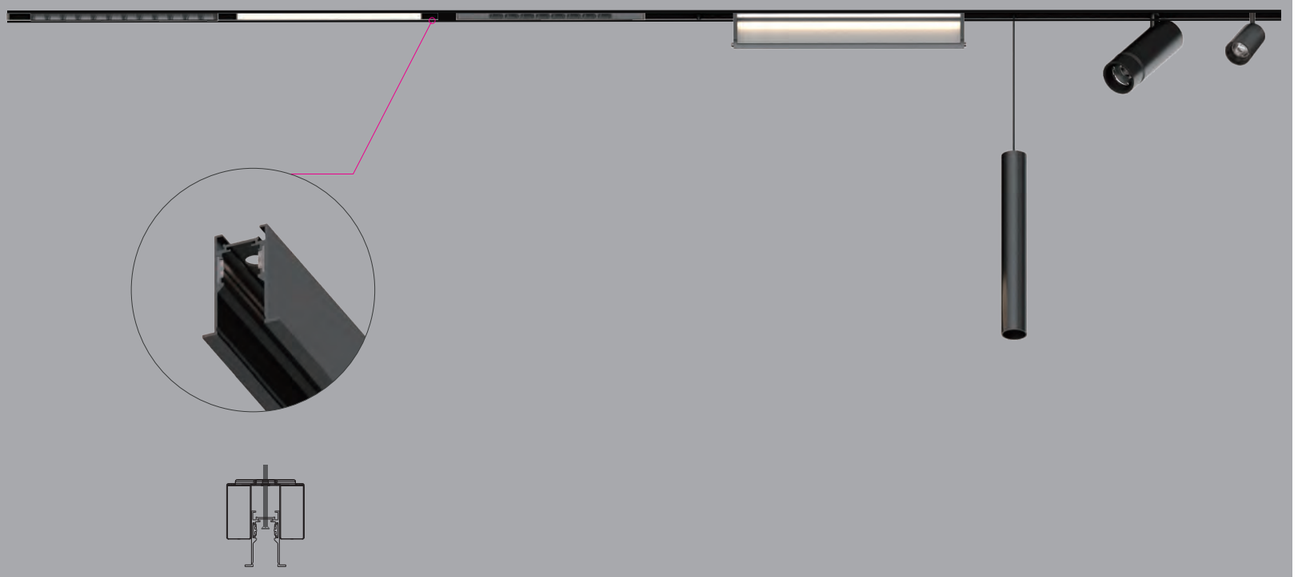

Short Info


·48V low voltage system
·Trim Recessed Track Rail Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from inner track , suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 0-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

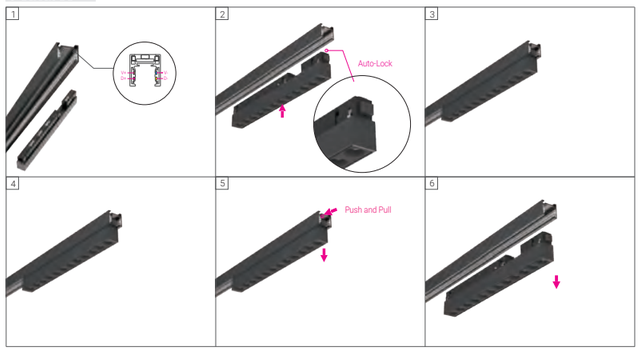

* Tool-free insert mounted by mechanical click-in locking mechanism

Short Info


Moduline 26 Trim Recessed Track System


Electrical


Non Dim
0-10V Dim
DALI Dim

Fixture Colour

Black White(Option)








Moduline 26 Trim Recessed Track System

Trim Recessed Track System Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trim Recessed Track Rail	ML26-FR1000-B	ML26-FR1000-W
2000	Trim Recessed Track Rail	ML26-FR2000-B	ML26-FR2000-W
3000	Trim Recessed Track Rail	ML26-FR3000-B	ML26-FR3000-W


*Track Rail including endcaps.

Accessories of Trim Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	80x80	(32x28)+(32x28)	Vertical 'L' shape corner module-Inner	ML26-FCM-V-B	ML26-FCM-V-W
	80X80	(32x80)+(32x80)	Vertical 'L' shape corner module-Outer	ML26-FCM-O-B	ML26-FCM-O-W
	80x80	(32x77)+(32x45)	Horizontal 'L' shape corner module	ML26-FCM-B	ML26-FCM-W
	120x80	(32x120)+(32x45)	'T' Shape Connector Set	ML26-FTC-B	ML26-FTC-W
	120X120	(32x120)+(32x120)	'X' Shape Connector Set	ML26-FXC-B	ML26-FXC-W
	Flexible Continuous Kit, Electrical			ML26-CKF-C-B	ML26-CKF-C-W
	*For Corner Connection.				
	Trim Recessed Track Rail Mounting Kit, 2pcs/ set			ML26-FIK	ML26-FIK
	Endcap Kit (2pcs/ set) of Trim Recessed Track			ML26-FEK-B	ML26-FEK-W
	Power Feeder Unit with feeder cables 500mm			ML26-PF-B	ML26-PF-W
	Track Rail Cover 1000mm			ML26-RC1000-B	ML26-RC1000-W
	Track Rail Cover 2000mm			ML26-RC2000-B	ML26-RC2000-W
	Track Rail Cover 3000mm			ML26-RC3000-B	ML26-RC3000-W
	*Track Rail Cover can be shortened as desired.				
	Linear Connector with screws			ML26-RLC-B	ML26-RLC-W
	Straight Continuous Kit			ML26-CKI-B	ML26-CKI-W
	*Continuous Kit needs to be used together with Linear Connector as a set.				
	48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black			KGP-100V48N	
	48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black			KGP-150V48N	
	48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black			KGP-250V48N	
	48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver			ELG-100-48-3Y	
	48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver			ELG-150-48-3Y	
	48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver			ELG-240-48-3Y	
	CASAMBI Bluetooth-DALI Converter Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm			ML26-CBDC-B	

MODULINE 26 – 48V Low Voltage Modular Linear System

Trimless Recessed Track System
Ceiling Thickness Adjustable Version

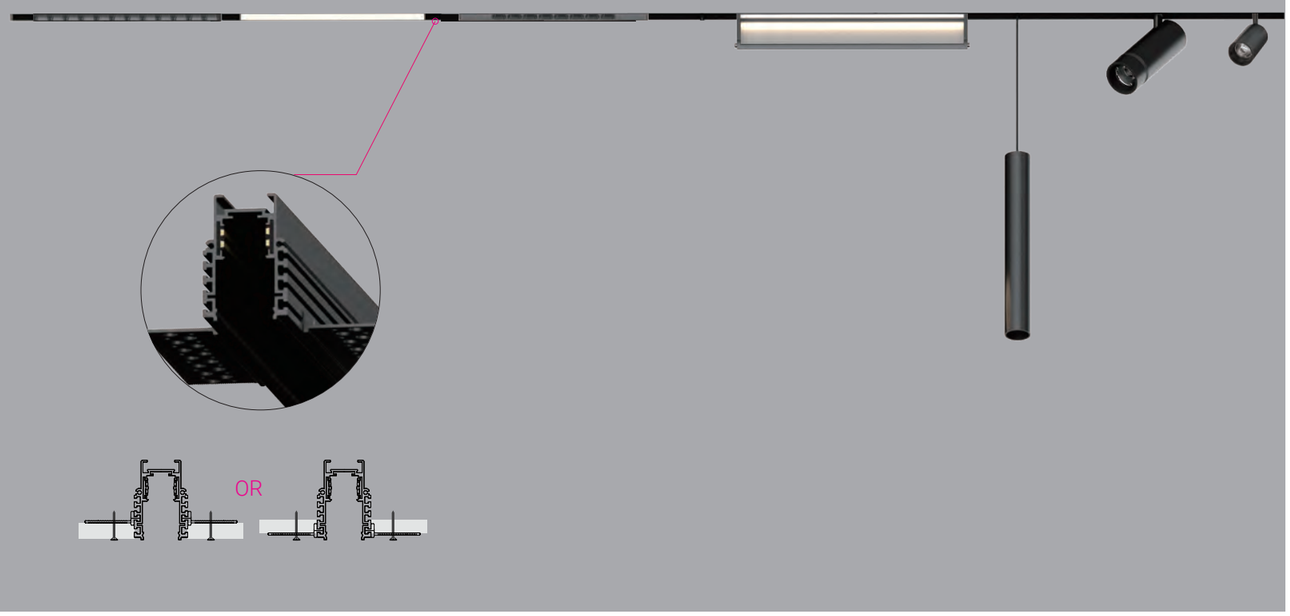

Short Info


·48V low voltage system
·Trimless Recessed Track Rail Version made of extruded aluminium with 35mm width groove and 52mm height
·Suitable for 3mm/5mm/9mm/12.5mm/15mm/18mm/20mm/25mm thickness ceilings heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 0-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

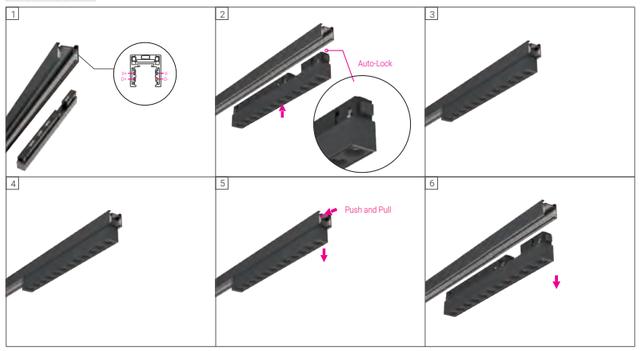


* Tool-free insert mounted by mechanical click-in locking mechanism

Short Info

Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Electrical
Non Dim
0-10V Dim
DALI Dim



Fixture Colour
Black White(Option)






Moduline 26 Trimless Recessed Track System
Ceiling Thickness Adjustable

Trimless Recessed Track System Ceiling Thickness Adjustable Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail	ML26-TAR1000-B	ML26-TAR1000-W
2000	Trimless Recessed Track Rail	ML26-TAR2000-B	ML26-TAR2000-W
3000	Trimless Recessed Track Rail	ML26-TAR3000-B	ML26-TAR3000-W

*Track Rail including endcaps.

Accessories of Ceiling Thickness Adjustable Trimless Recessed Track System



L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
80x80	(40x28)+(40x28)	Vertical 'L' shape corner module-Inner	ML26-TACM-V-B	ML26-TACM-V-W



80x80	(40x80)+(40x80)	Vertical 'L' shape corner module-Outer	ML26-TACM-O-B	ML26-TACM-O-W



80x80	(40x82)+(40x42)	Horizontal 'L' shape corner module	ML26-TACM-B	ML26-TACM-W



80x120	(40x120)+(40x42)	'T' Shape Connector Set	ML26-TATC-B	ML26-TATC-W



120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TAXC-B	ML26-TAXC-W

Flexible Continuous Kit, Electrical	ML26-CKF-C-B	ML26-CKF-C-W

*For Corner Connection.



Endcap Kit (2pcs/ set) of Trimless Recessed Track	ML26-TAEK-B	ML26-TAEK-W
Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W




Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
Track Rail Cover 3000mm	ML26-RC3000-B	ML26-RC3000-W

*Track Rail Cover can be shortened as desired.



Linear Connector with screws	ML26-RLC-B	ML26-RLC-W
Straight Continuous Kit	ML26-CKI-B	ML26-CKI-W

*Continuous Kit needs to be used together with Linear Connector as a set.



Trimless Recessed installation kit 1set for 1000mm track	ML26-TAIK	ML26-TAIK



48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N
48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N
48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N




48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y
48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y
48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y



CASAMBI Bluetooth-DALI Converter Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm	ML26-CBDC-B

MODULINE 26 – 48V Low Voltage Modular Linear System

Trimless Recessed Track System-EI
Easy Installation Version

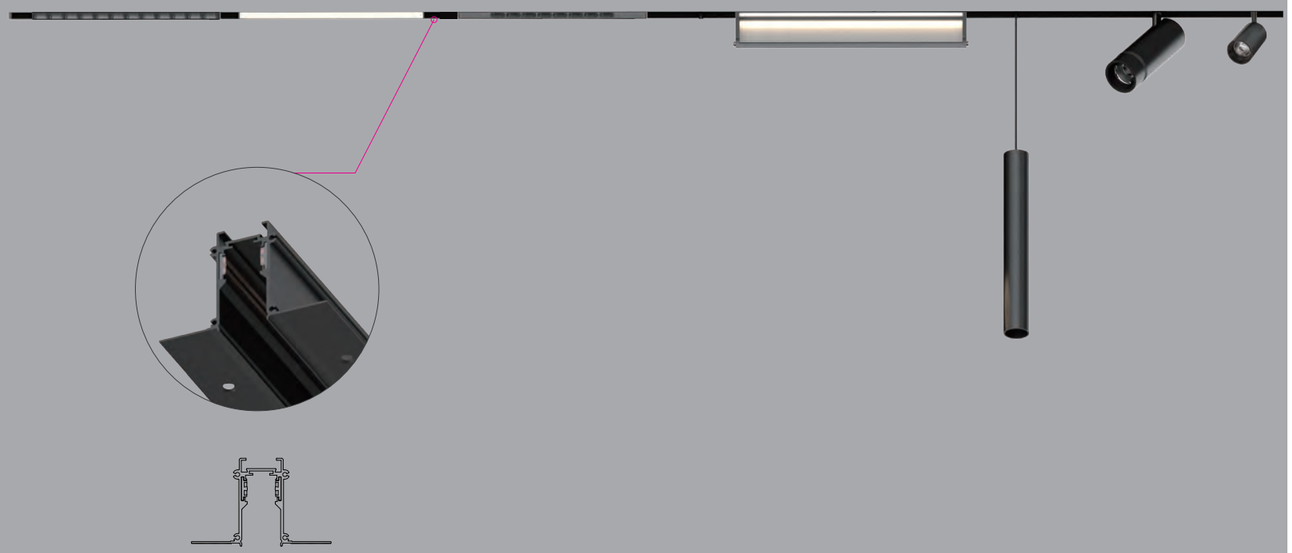

Short Info


·48V low voltage system
·Trimless Recessed Track Rail Easy Installation Version made of extruded aluminium with 26mm width groove and 52mm height
·Mounted from surface, suitable for all thickness ceiling heights
·Track Rail available with standard lengths 1000mm, 2000mm and 3000mm
·'L' shape corner module, 'T' shape connector and 'X' shape connector available for flexible system
·Linear Connector and Continuous Kit provided for continuous Track Rail connection
·Various lighting insets with multiple lighting applications, tool-free insert mounted by mechanical click-in locking mechanism
·Insets available with Non Dim, 0-10V Dim and DALI Dim

Insets



* Check details of light insets at following pages

Features

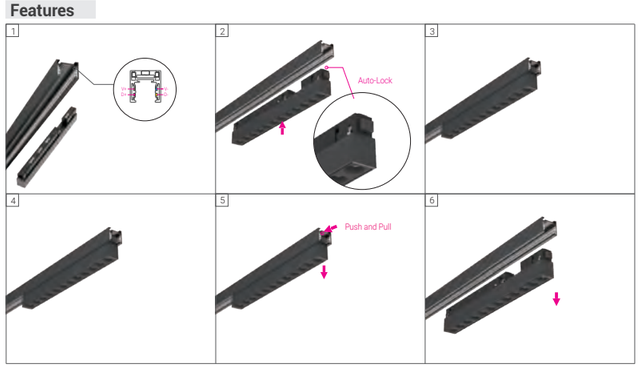

* Tool-free insert mounted by mechanical click-in locking mechanism

Short Info


Moduline 26 Trimless Recessed Track System
Easy Installation Version

Electrical

Non Dim
0-10V Dim
DALI Dim

Fixture Colour

Black White(Option)







Moduline 26 Trimless Recessed Track System
Easy Installation Version

Trimless Recessed Track System Easy Installation Version Installation Track Rail

L (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
1000	Trimless Recessed Track Rail-EI	ML26-TR1000-EI-B	ML26-TR1000-EI-W
2000	Trimless Recessed Track Rail-EI	ML26-TR2000-EI-B	ML26-TR2000-EI-W
3000	Trimless Recessed Track Rail-EI	ML26-TR3000-EI-B	ML26-TR3000-EI-W

•Track Rail including endcaps.

Accessories of Easy Installation Version Trimless Recessed Track System

	L (mm)	Cutout (mm)	Description	Code/ Model (Black-Standard)	Code/ Model (White-Option)
	100x100	(40x48)+(40x48)	Vertical 'L' shape corner module-Inner	ML26-TCM-EI-V-B	ML26-TCM-EI-V-W
	100x100	(40x100)+(40x100)	Vertical 'L' shape corner module-Outer	ML26-TCM-EI-O-B	ML26-TCM-EI-O-W
	100x100	(40x80)+(40x40)	Horizontal 'L' shape corner module	ML26-TCM-EI-B	ML26-TCM-EI-W
	100x120	(40x120)+(40x40)	'T' Shape Connector Set	ML26-TTC-EI-B	ML26-TTC-EI-W
	120X120	(40x120)+(40x120)	'X' Shape Connector Set	ML26-TXC-EI-B	ML26-TXC-EI-W
			Flexible Continuous Kit, Electrical •For Corner Connection.	ML26-CKF-C-B	ML26-CKF-C-W
			Endcap Kit (2pcs/ set) of Trimless Recessed Track	ML26-TEK-EI-B	ML26-TEK-EI-W
			Power Feeder Unit with feeder cables 500mm	ML26-PF-B	ML26-PF-W
			Track Rail Cover 1000mm	ML26-RC1000-B	ML26-RC1000-W
			Track Rail Cover 2000mm	ML26-RC2000-B	ML26-RC2000-W
			Track Rail Cover 3000mm •Track Rail Cover can be shortened as desired.	ML26-RC3000-B	ML26-RC3000-W
			Linear Connector with screws	ML26-RLC-B	ML26-RLC-W
			Straight Continuous Kit •Continuous Kit needs to be used together with Linear Connector as a set.	ML26-CKI-B	ML26-CKI-W
			Trimless Recessed Track mounting kit 1set for 1000mm track	ML26-RMK	ML26-RMK
			48V In-track Driver, KGP48V Constant Voltage 100W LED Driver, Black	KGP-100V48N	
			48V In-track Driver, KGP48V Constant Voltage 150W LED Driver, Black	KGP-150V48N	
			48V In-track Driver, KGP48V Constant Voltage 250W LED Driver, Black	KGP-250V48N	
			48V Remote Driver, Meanwell 48V Constant Voltage 100W LED Driver	ELG-100-48-3Y	
			48V Remote Driver, Meanwell 48V Constant Voltage 150W LED Driver	ELG-150-48-3Y	
			48V Remote Driver, Meanwell 48V Constant Voltage 240W LED Driver	ELG-240-48-3Y	
			CASAMBI Bluetooth-DALI Converter Max. 64 DALI Light Insets Divided into 8 Groups. Each Group Can be Controlled Separately. LxH: 143x58mm	ML26-CBDC-B	

MODULINE 26 – ML26-RS25 Spotlight Inset



ML26-RS25-3W
Single Spot




ML26-RS25-5W
Double Spot


18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info


- System: 3W, 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 380lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim







Light Distribution

3000K







Finish



Black(B)



White(W)



Brushed Bronze(Z)



Brushed Gold(G)

Order Info (ML26-RS25 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	18°	220lm	170lm	MLR0-9271803F-BB
					30°	220lm	170lm	MLR0-9273003F-BB
					45°	220lm	170lm	MLR0-9274503F-BB
				3000K	18°	230lm	180lm	MLR0-9301803F-BB
					30°	230lm	180lm	MLR0-9303003F-BB
					45°	230lm	180lm	MLR0-9304503F-BB
				4000K	18°	250lm	190lm	MLR0-9401803F-BB
					30°	250lm	190lm	MLR0-9403003F-BB
					45°	250lm	190lm	MLR0-9404503F-BB
4W	5W	48V	90	2700K	18°	420lm	330lm	MLR1-9271805F-BB
					30°	420lm	330lm	MLR1-9273005F-BB
					45°	420lm	330lm	MLR1-9274505F-BB
				3000K	18°	450lm	350lm	MLR1-9301805F-BB
					30°	450lm	350lm	MLR1-9303005F-BB
					45°	450lm	350lm	MLR1-9304505F-BB
				4000K	18°	500lm	380lm	MLR1-9401805F-BB
					30°	500lm	380lm	MLR1-9403005F-BB
					45°	500lm	380lm	MLR1-9404505F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MLR1-9403005F-BB with Honeycomb
MLR1-9403005F-BB-**H**

Coding

MLR0 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR0 ML26-RS25-3W Single Spot	**927** CRI>90/ 2700K	**18** 18°	**03** 3W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MLR1 ML26-RS25-5W Double Spot	**930** CRI>90/ 3000K	**30** 30°	**05** 5W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
					G Brushed Gold		

MODULINE 26 – ML26-RS40 Spotlight Inset



ML26-RS40-8W
Single Spot




ML26-RS40-16W
Double Spot


18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info


- System: 8W, 16W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 820lm or 1700lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim







Light Distribution

3000K







Finish



Black(B)



White(W)



Brushed Bronze(Z)



Brushed Gold(G)

Order Info (ML26-RS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7.5W	8W	48V	90	2700K	18°	1000lm	700lm	MLR2-9271808F-BB
					30°	1000lm	750lm	MLR2-9273008F-BB
					45°	1000lm	500lm	MLR2-9274508F-BB
				3000K	18°	1100lm	730lm	MLR2-9301808F-BB
					30°	1100lm	800lm	MLR2-9303008F-BB
					45°	1100lm	530lm	MLR2-9304508F-BB
				4000K	18°	1200lm	760lm	MLR2-9401808F-BB
					30°	1200lm	820lm	MLR2-9403008F-BB
					45°	1200lm	550lm	MLR2-9404508F-BB
15W	16W	48V	90	2700K	18°	2000lm	1450lm	MLR3-9271816F-BB
					30°	2000lm	1550lm	MLR3-9273016F-BB
					45°	2000lm	1050lm	MLR3-9274516F-BB
				3000K	18°	2200lm	1500lm	MLR3-9301816F-BB
					30°	2200lm	1600lm	MLR3-9303016F-BB
					45°	2200lm	1100lm	MLR3-9304516F-BB
				4000K	18°	2400lm	1550lm	MLR3-9401816F-BB
					30°	2400lm	1700lm	MLR3-9403016F-BB
					45°	2400lm	1150lm	MLR3-9404516F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MLR3-9403016F-BB with Honeycomb
MLR3-9403016F-BB-**H**

Coding

MLR2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR2 ML26-RS40-8W Single Spot	**927** CRI>90/ 2700K	**18** 18°	**08** 8W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MLR3 ML26-RS40-16W Double Spot	**930** CRI>90/ 3000K	**30** 30°	**16** 16W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
					G Brushed Gold		

MODULINE 26 – ML26-RS40 Spotlight Inset




ML26-RS40-12W
Single Spot

ML26-RS40-24W
Double Spot

18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 12W, 24W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1050lm or 2300lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim




Light Distribution

3000K

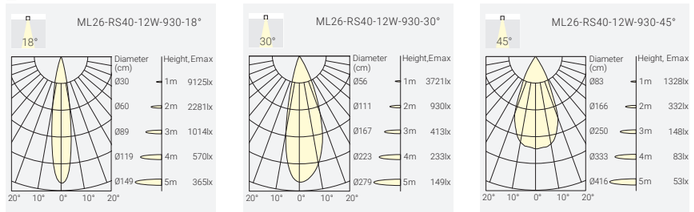

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-RS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48V	90	2700K	18°	1400lm	970lm	MLR4-9271812F-BB
					30°	1400lm	970lm	MLR4-9273012F-BB
					45°	1400lm	700lm	MLR4-9274512F-BB
				3000K	18°	1500lm	1000lm	MLR4-9301812F-BB
					30°	1500lm	1000lm	MLR4-9303012F-BB
					45°	1500lm	730lm	MLR4-9304512F-BB
				4000K	18°	1600lm	1050lm	MLR4-9401812F-BB
					30°	1600lm	1050lm	MLR4-9403012F-BB
					45°	1600lm	760lm	MLR4-9404512F-BB
22W	24W	48V	90	2700K	18°	2800lm	1900lm	MLR5-9271824F-BB
					30°	2800lm	2150lm	MLR5-9273024F-BB
					45°	2800lm	1350lm	MLR5-9274524F-BB
				3000K	18°	3000lm	2000lm	MLR5-9301824F-BB
					30°	3000lm	2250lm	MLR5-9303024F-BB
					45°	3000lm	1400lm	MLR5-9304524F-BB
				4000K	18°	3200lm	2050lm	MLR5-9401824F-BB
					30°	3200lm	2300lm	MLR5-9403024F-BB
					45°	3200lm	1500lm	MLR5-9404524F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MLR5-9401824F-BB with Honeycomb
MLR5-9401824F-BB-H

Coding

MLR4 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR4 ML26-RS40-12W Single Spot	**927** CRI>90/ 2700K	**18** 18°	**12** 12W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MLR5 ML26-RS40-24W Double Spot	**930** CRI>90/ 3000K	**30** 30°	**24** 24W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim	**Z** Brushed Bronze		
					G Brushed Gold		



Project: Crescent Fund Managemen Office, Singapore

MODULINE 26 – ML26-RT55 Spotlight Inset




ML26-RT55-10W
Zooming Spot

20°~40° | 35°~60° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°-40°, 35°-60°, Zooming Spot
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

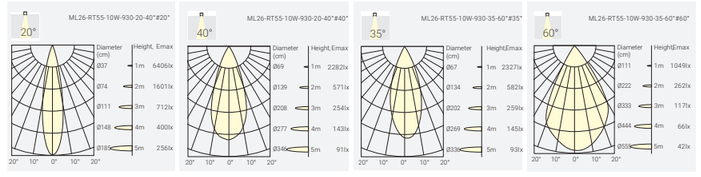

Finish



White | Black

Optional accessary



Honeycomb

Code for MLR6-940Z410F-BB with **H**oneycomb
MLR6-940Z410F-BB-**H**

Order Info (ML26-RT55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	20°-40°	1200lm	950lm	MLR6-927Z410F-BB
					35°-60°	1200lm	850lm	MLR6-927Z610F-BB
				3000K	20°-40°	1300lm	1000lm	MLR6-930Z410F-BB
					35°-60°	1300lm	900lm	MLR6-930Z610F-BB
				4000K	20°-40°	1400lm	1050lm	MLR6-940Z410F-BB
					35°-60°	1400lm	950lm	MLR6-940Z610F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLR6	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MLR6 ML26-RS55-10W		927 CRI>90/ 2700K	Z4 20°~40°	10 10W	F On-Off		W White	B Black		H Honeycomb
		930 CRI>90/ 3000K	Z6 35°~60°		A 0-10V Dim		B Black			
		940 CRI>90/ 4000K			D DALI Dim					

MODULINE 26 – ML26-RS55 Spotlight Inset




ML26-RS55-14W

20° | 30° | 40° | 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 14W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 30°, 40°, 50°
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim




Light Distribution

3000K

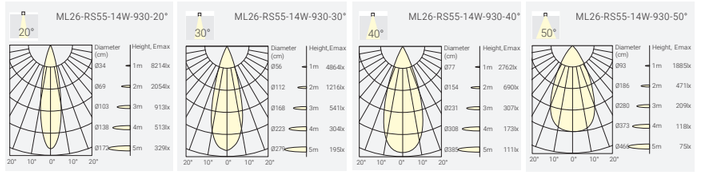

Finish



White | Black

Optional accessary



Honeycomb

Code for MLR8-9403014F-BB with **H**oneycomb
MLR8-9403014F-BB-**H**

Order Info (ML26-RS55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	48V	90	2700K	20°	1700lm	1250lm	MLR8-9272014F-BB
					30°	1700lm	1350lm	MLR8-9273014F-BB
					40°	1700lm	1300lm	MLR8-9274014F-BB
					50°	1700lm	1250lm	MLR8-9275014F-BB
				3000K	20°	1800lm	1300lm	MLR8-9302014F-BB
					30°	1800lm	1400lm	MLR8-9303014F-BB
					40°	1800lm	1350lm	MLR8-9304014F-BB
					50°	1800lm	1300lm	MLR8-9305014F-BB
				4000K	20°	1900lm	1350lm	MLR8-9402014F-BB
					30°	1900lm	1450lm	MLR8-9403014F-BB
					40°	1900lm	1400lm	MLR8-9404014F-BB
					50°	1900lm	1350lm	MLR8-9405014F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLR8	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MLR8 ML26-RS55-14W Single Spot		927 CRI>90/ 2700K	20 20°	14 14W	F On-Off		W White	B Black		H Honeycomb
		930 CRI>90/ 3000K	30 30°		A 0-10V Dim		B Black			
		940 CRI>90/ 4000K	40 40°		D DALI Dim					
			50 50°							

MODULINE 26 – ML26-RS72 Spotlight Inset




ML26-RS72-19W
ML26-RS72-26W

20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2500lm or 3400lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

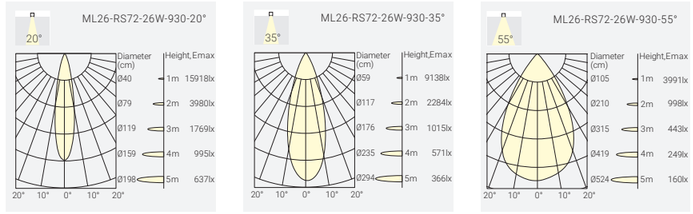

Finish



White Black

Order Info (ML26-RS72 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	20°	2600lm	2300lm	MLR7-9272019F-BB
					35°	2600lm	2300lm	MLR7-9273519F-BB
					55°	2600lm	2300lm	MLR7-9275519F-BB
				3000K	20°	2700lm	2400lm	MLR7-9302019F-BB
					35°	2700lm	2400lm	MLR7-9303519F-BB
					55°	2700lm	2400lm	MLR7-9305519F-BB
				4000K	20°	2800lm	2500lm	MLR7-9402019F-BB
					35°	2800lm	2500lm	MLR7-9403519F-BB
					55°	2800lm	2500lm	MLR7-9405519F-BB
25W	26W	48V	90	2700K	20°	3700lm	3200lm	MLR7-9272026F-BB
					35°	3700lm	3200lm	MLR7-9273526F-BB
					55°	3700lm	3200lm	MLR7-9275526F-BB
				3000K	20°	3800lm	3300lm	MLR7-9302026F-BB
					35°	3800lm	3300lm	MLR7-9303526F-BB
					55°	3800lm	3300lm	MLR7-9305526F-BB
				4000K	20°	3900lm	3400lm	MLR7-9402026F-BB
					35°	3900lm	3400lm	MLR7-9403526F-BB
					55°	3900lm	3400lm	MLR7-9405526F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessary



Honeycomb

Code for MLR7-9402026F-BB with **H**oneycomb
MLR7-9402026F-BB-**H**

Coding

MLR7 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR7 ML26-RS72-19W	**927** CRI>90/ 2700K	**20** 20°	**19** 19W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
MLR7 ML26-RS72-26W	**930** CRI>90/ 3000K	**35** 35°	**26** 26W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**55** 55°		**D** DALI Dim			

MODULINE 26 – ML26-RS96 Spotlight Inset




ML26-RS96-9W

15° 25° 35° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 35°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

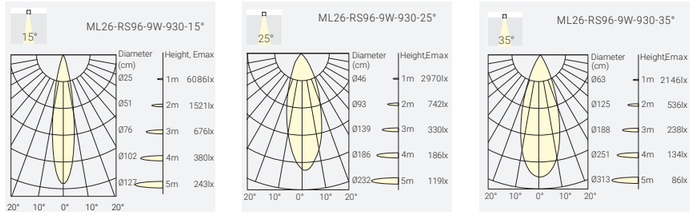

Finish



White Black

Order Info (ML26-RS96 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48V	90	2700K	15°	1300lm	880lm	MLR9-9271509N-BN
					25°	1300lm	900lm	MLR9-9272509N-BN
					35°	1300lm	900lm	MLR9-9273509N-BN
				3000K	15°	1400lm	900lm	MLR9-9301509N-BN
					25°	1400lm	950lm	MLR9-9302509N-BN
					35°	1400lm	950lm	MLR9-9303509N-BN
				4000K	15°	1500lm	950lm	MLR9-9401509N-BN
					25°	1500lm	1000lm	MLR9-9402509N-BN
					35°	1500lm	1000lm	MLR9-9403509N-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLR9 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLR9 ML26-RS96-9W	**927** CRI>90/ 2700K	**15** 15°	**09** 9W	**F** On-Off	**W** White	**N** None	
	930 CRI>90/ 3000K	**25** 25°		**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**35** 35°		**D** DALI Dim			

MODULINE 26 – ML26-FRS72 Spotlight Inset




ML26-FRS72-10W
single spot

25° 36° 50° Cut-off 30° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 36°, 50°
- Lumen Output: Up to 1000lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim




Light Distribution

3000K

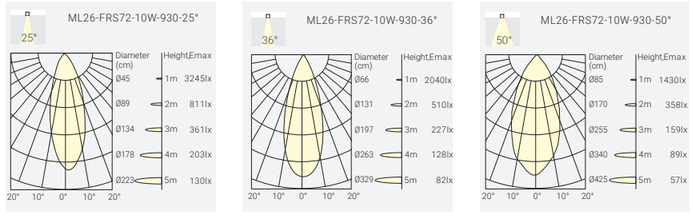

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-FRS72 in Black Housing & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	25°	1200lm	730lm	MLF1-9272510F-BC
					36°	1200lm	900lm	MLF1-9273610F-BC
					50°	1200lm	900lm	MLF1-9275010F-BC
				3000K	25°	1300lm	750lm	MLF1-9302510F-BC
					36°	1300lm	950lm	MLF1-9303610F-BC
					50°	1300lm	950lm	MLF1-9305010F-BC
				4000K	25°	1400lm	800lm	MLF1-9402510F-BC
					36°	1400lm	1000lm	MLF1-9403610F-BC
					50°	1400lm	1000lm	MLF1-9405010F-BC

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



Dark Light Black Specular Matt White

Optional accessary



Honeycomb

Code for MLF1-9302510F-BC with Honeycomb
MLF1-9302510F-BC-**H**

Coding

MLF1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLF1 ML26-FRS72-10W Single Spot	**927** CRI>90/ 2700K	**25** 25°	**10** 10W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
	930 CRI>90/ 3000K	**36** 36°		**A** 0-10V Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**50** 50°		**D** DALI Dim	**Z** Brushed Bronze	**S** Specular	
					G Brushed Gold	**C** Dark Light	
						M Matt	

MODULINE 26 – ML26-FRS72 Double Spotlight Inset




ML26-FRS72-20W
Double Inset

25° 36° 50° Cut-off 30° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- System: 20W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 25°, 36°, 50°
- Lumen Output: Up to 1950lm System Luminous Flux
- IP Class: IP20
- Versions: On-Off, 0-10V Dim, DALI Dim




Light Distribution

3000K

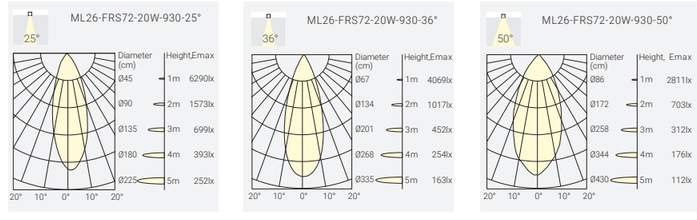

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-FRS72 in Black Housing & Dark Light Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	48V	90	2700K	25°	2400lm	1700lm	MLF2-9272520F-BC
					36°	2400lm	1850lm	MLF2-9273620F-BC
					50°	2400lm	1850lm	MLF2-9275020F-BC
				3000K	25°	2600lm	1800lm	MLF2-9302520F-BC
					36°	2600lm	1900lm	MLF2-9303620F-BC
					50°	2600lm	1900lm	MLF2-9305020F-BC
				4000K	25°	2800lm	1850lm	MLF2-9402520F-BC
					36°	2800lm	1950lm	MLF2-9403620F-BC
					50°	2800lm	1950lm	MLF2-9405020F-BC

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Reflector Options



Dark Light Black Specular Matt White

Optional accessary



Honeycomb

Code for MLF2-9302520F-BC with Honeycomb
MLF2-9302520F-BC-**H**

Coding

MLF2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLF2 ML26-FRS72-20W Double Spot	**927** CRI>90/ 2700K	**25** 25°	**20** 20W	**F** On-Off	**W** White	**W** White	**H** Honeycomb
	930 CRI>90/ 3000K	**36** 36°		**A** 0-10V Dim	**B** Black	**B** Black	
	940 CRI>90/ 4000K	**50** 50°		**D** DALI Dim	**Z** Brushed Bronze	**S** Specular	
					G Brushed Gold	**C** Dark Light	
						M Matt	

MODULINE 26 – ML26-FRD80 Round Downlight Inset




ML26-FRD80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Slim Track



Light Distribution

3000K



Finish



White Black

Order Info (ML26-FRD80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1200lm	1100lm	MLRD-9273010F-BB
				3000K	30°	1300lm	1150lm	MLRD-9303010F-BB
				4000K	30°	1400lm	1200lm	MLRD-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLRD – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRD ML26-FRD80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 0-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

Optional accessory



Honeycomb

Code for MLRD-9303010F-BB with Honeycomb
MLRD-9303010F-BB-H

MODULINE 26 – ML26-FRDH80 Round Downlight Inset




ML26-FRDH80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Standard Track



Light Distribution

3000K



Finish



White Black

Order Info (ML26-FRDH80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1200lm	1100lm	MLRH-9273010F-BB
				3000K	30°	1300lm	1150lm	MLRH-9303010F-BB
				4000K	30°	1400lm	1200lm	MLRH-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLRH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLRH ML26-FRDH80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 0-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

Optional accessory



Honeycomb

Code for MLRH-9303010F-BB with Honeycomb
MLRH-9303010F-BB-H

MODULINE 26 – ML26-FSD80 Square Downlight Inset




ML26-FSD80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Slim Track



Light Distribution

3000K



Finish



White Black

Order Info (ML26-FSD80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1200lm	1150lm	MLSD-9273010F-BB
				3000K	30°	1300lm	1200lm	MLSD-9303010F-BB
				4000K	30°	1400lm	1250lm	MLSD-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLSD – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLSD ML26-FSD80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 0-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

Optional accessory



Honeycomb

Code for MLSD-9303010F-BB with Honeycomb
MLSD-9303010F-BB-H

MODULINE 26 – ML26-FSDH80 Square Downlight Inset




ML26-FSDH80-10W

30° | Cut-off 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 1250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim
- Can only fit with MODULINE 26 Standard Track



Light Distribution

3000K



Finish



White Black

Order Info (ML26-FSDH80 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	30°	1200lm	1150lm	MLSH-9273010F-BB
				3000K	30°	1300lm	1200lm	MLSH-9303010F-BB
				4000K	30°	1400lm	1250lm	MLSH-9403010F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLSH – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLSH ML26-FSDH80-10W	927 CRI>90/ 2700K	30 30°	10 10W	F On-Off	W White	W White	H Honeycomb
	930 CRI>90/ 3000K			A 0-10V Dim	B Black	B Black	
	940 CRI>90/ 4000K			D DALI Dim			

Optional accessory



Honeycomb

Code for MLSH-9303010F-BB with Honeycomb
MLSH-9303010F-BB-H

MODULINE 26 – ML26-LA240 Slim Accent Light Inset

New



ML26-LA240-13W

35° 50° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA Intertek OSRAM 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 50°
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim

ON-OFF




0-10V Dim, DALI Dim



Light Distribution

3000K

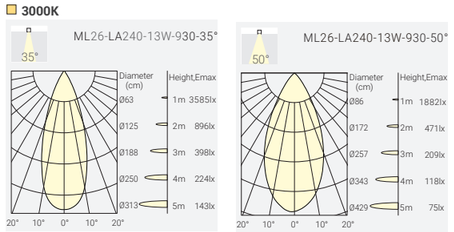

Finish



White-Black



Black-Black

Order Info (ML26-LA240 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48V	90	2700K	35°	1400lm	1300lm	MLLA-9273513F-BB
					50°	1400lm	1150lm	MLLA-9275013F-BB
				3000K	35°	1500lm	1350lm	MLLA-9303513F-BB
					50°	1500lm	1200lm	MLLA-9305013F-BB
				4000K	35°	1600lm	1450lm	MLLA-9403513F-BB
					50°	1600lm	1300lm	MLLA-9405013F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLLA – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLA ML26-LA240-13W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	35 35° 50 50°	13 13W	F On-Off A 0-10V Dim D DALI Dim	W White B Black	B Black	

MODULINE 26 – ML26-LA470 Slim Accent Light Inset

New



ML26-LA470-26W

35° 50° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA Intertek OSRAM 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 35°, 50°
- Lumen Output: Up to 2800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim

ON-OFF




0-10V Dim, DALI Dim



Light Distribution

3000K

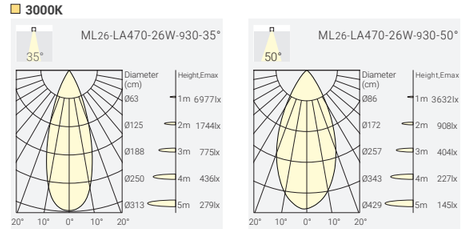

Finish



White-Black



Black-Black

Order Info (ML26-LA470 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48V	90	2700K	35°	2800lm	2500lm	MLLA-9273526F-BB
					50°	2800lm	2250lm	MLLA-9275026F-BB
				3000K	35°	3000lm	2650lm	MLLA-9303526F-BB
					50°	3000lm	2350lm	MLLA-9305026F-BB
				4000K	35°	3200lm	2800lm	MLLA-9403526F-BB
					50°	3200lm	2500lm	MLLA-9405026F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLLA – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLA ML26-LA470-26W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	35 35° 50 50°	26 26W	F On-Off A 0-10V Dim D DALI Dim	W White B Black	B Black	

MODULINE 26 – ML26-AL190 Accent Light Inset




ML26-AL190-3W ML26-AL190-7W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- System: 3W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

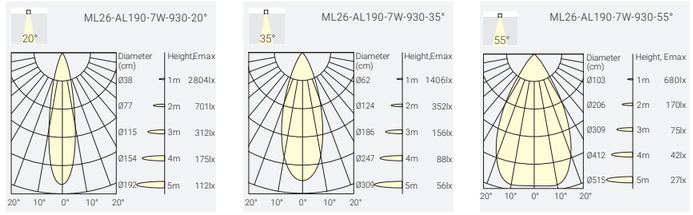

Finish



White Black

Order Info (ML26-AL190 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
2W	3W	48V	90	2700K	20°	230lm	170lm	MLA3-9272003F-BB
					35°	230lm	170lm	MLA3-9273503F-BB
					55°	230lm	160lm	MLA3-9275503F-BB
				3000K	20°	250lm	180lm	MLA3-9302003F-BB
					35°	250lm	180lm	MLA3-9303503F-BB
					55°	250lm	170lm	MLA3-9305503F-BB
				4000K	20°	270lm	200lm	MLA3-9402003F-BB
					35°	270lm	200lm	MLA3-9403503F-BB
					55°	270lm	190lm	MLA3-9405503F-BB
6W	7W	48V	90	2700K	20°	700lm	500lm	MLA4-9272007F-BB
					35°	700lm	500lm	MLA4-9273507F-BB
					55°	700lm	470lm	MLA4-9275507F-BB
				3000K	20°	750lm	550lm	MLA4-9302007F-BB
					35°	750lm	550lm	MLA4-9303507F-BB
					55°	750lm	500lm	MLA4-9305507F-BB
				4000K	20°	820lm	600lm	MLA4-9402007F-BB
					35°	820lm	600lm	MLA4-9403507F-BB
					55°	820lm	550lm	MLA4-9405507F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLA3 ____ ____ ____ ____ ____ ____ ____

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA3 ML26-AL190-3W	927 CRI>90/ 2700K	20 20°	03 3W	F On-Off	W White	B Black	
MLA4 ML26-AL190-7W	930 CRI>90/ 3000K	35 35°	07 7W	A 0-10V Dim	B Black		
	940 CRI>90/ 4000K	55 55°		D DALI Dim			

MODULINE 26 – ML26-AL280 Accent Light Inset




ML26-AL280-9W ML26-AL280-13W

20° 35° 55° 2700K 3000K 4000K CRI >90 UGR<19 48V DC

IP20 CE CB UKCA ETL Intertek OSRAM 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- System: 9W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

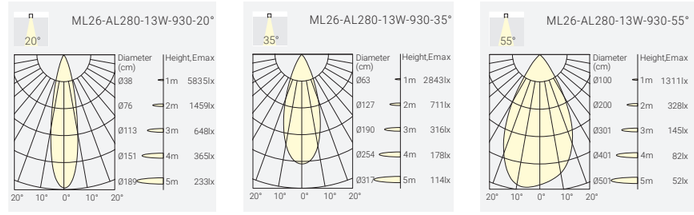

Finish



White Black

Order Info (ML26-AL280 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
8W	9W	48V	90	2700K	20°	950lm	700lm	MLA1-9272009F-BB
					35°	950lm	700lm	MLA1-9273509F-BB
					55°	950lm	650lm	MLA1-9275509F-BB
				3000K	20°	1000lm	750lm	MLA1-9302009F-BB
					35°	1000lm	750lm	MLA1-9303509F-BB
					55°	1000lm	680lm	MLA1-9305509F-BB
				4000K	20°	1100lm	800lm	MLA1-9402009F-BB
					35°	1100lm	800lm	MLA1-9403509F-BB
					55°	1100lm	750lm	MLA1-9405509F-BB
12W	13W	48V	90	2700K	20°	1400lm	1000lm	MLA2-9272013F-BB
					35°	1400lm	1000lm	MLA2-9273513F-BB
					55°	1400lm	950lm	MLA2-9275513F-BB
				3000K	20°	1500lm	1100lm	MLA2-9302013F-BB
					35°	1500lm	1100lm	MLA2-9303513F-BB
					55°	1500lm	1000lm	MLA2-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA2-9402013F-BB
					35°	1600lm	1200lm	MLA2-9403513F-BB
					55°	1600lm	1100lm	MLA2-9405513F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA1 ML26-AL280-9W	927 CRI>90/ 2700K	20 20°	09 9W	F On-Off	W White	B Black	
MLA2 ML26-AL280-13W	930 CRI>90/ 3000K	35 35°	13 13W	A 0-10V Dim	B Black		
	940 CRI>90/ 4000K	55 55°		D DALI Dim			

MODULINE 26 – ML26-AL560 Accent Light Inset




ML26-AL560-26W

20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

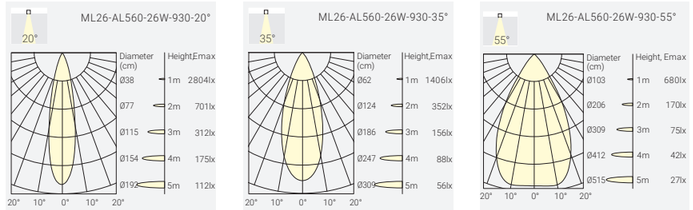

Finish



White Black

Order Info (ML26-AL560 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48V	90	2700K	20°	2800lm	2200lm	MLA6-9272026F-BB
					35°	2800lm	2350lm	MLA6-9273526F-BB
					55°	2800lm	1900lm	MLA6-9275526F-BB
				3000K	20°	3000lm	2300lm	MLA6-9302026F-BB
					35°	3000lm	2450lm	MLA6-9303526F-BB
					55°	3000lm	2000lm	MLA6-9305526F-BB
				4000K	20°	3200lm	2400lm	MLA6-9402026F-BB
					35°	3200lm	2550lm	MLA6-9403526F-BB
					55°	3200lm	2100lm	MLA6-9405526F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLA6 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA6 ML26-AL560-26W	927 CRI>90/ 2700K	20 20°	26 26W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°		A 0-10V Dim	B Black		
	940 CRI>90/ 4000K	55 55°		D DALI Dim			

MODULINE 26 – ML26-SA280 Adjustable Accent Light Inset




ML26-SA280-13W

20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim




Light Distribution

3000K

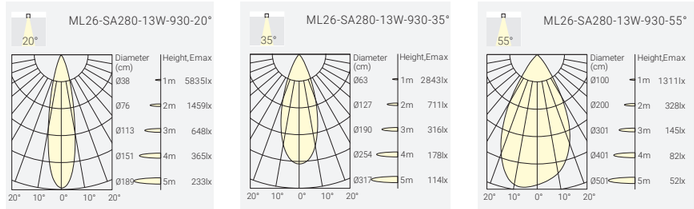

Finish



White Black

Order Info (ML26-SA280 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48V	90	2700K	20°	1400lm	1000lm	MLA5-9272013F-BB
					35°	1400lm	1000lm	MLA5-9273513F-BB
					55°	1400lm	950lm	MLA5-9275513F-BB
				3000K	20°	1500lm	1000lm	MLA5-9302013F-BB
					35°	1500lm	1000lm	MLA5-9303513F-BB
					55°	1500lm	1100lm	MLA5-9305513F-BB
				4000K	20°	1600lm	1200lm	MLA5-9402013F-BB
					35°	1600lm	1200lm	MLA5-9403513F-BB
					55°	1600lm	1100lm	MLA5-9405513F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLA5 – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLA5 ML26-SA280-13W Adjustable Accent	927 CRI>90/ 2700K	20 20°	13 13W	F On-Off	W White	B Black	
	930 CRI>90/ 3000K	35 35°		A 0-10V Dim	B Black		
	940 CRI>90/ 4000K	55 55°		D DALI Dim			

MODULINE 26 – ML26-SG280 Adjustable General Light Inset




ML26-SG280-7W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-SG280 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	110°	550lm	430lm	MLG5-927A107F-BN
				3000K	110°	600lm	400lm	MLG5-930A107F-BN
				4000K	110°	650lm	450lm	MLG5-940A107F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLG5	–	***	**	**	*	–	*	*	–	*

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG5 ML26-SG280-7W General Light	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**A1** 110°	**07** 7W	**F** On-Off **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**N** None	

MODULINE 26 – ML26-LG470 Slim General Light Inset

New




ML26-LG470-13W

110° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-LG470 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	48V	90	2700K	110°	1100lm	800lm	MLLG-927A113F-BN
				3000K	110°	1200lm	850lm	MLLG-930A113F-BN
				4000K	110°	1300lm	900lm	MLLG-940A113F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLLG	–	***	**	**	*	–	*	*	–	*

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLG ML26-LG470-13W	**927** CRI>90/ 2700K **930** CRI>90/ 3000K **940** CRI>90/ 4000K	**A1** 110°	**13** 13W	**F** On-Off **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**N** None	

MODULINE 26 – ML26-LG700 Slim General Light Inset

New




ML26-LG700-19W

110° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1350lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim

ON-OFF




0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-LG700 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	110°	1700lm	1200lm	MLLG-927A119F-BN
				3000K	110°	1800lm	1300lm	MLLG-930A119F-BN
				4000K	110°	1900lm	1350lm	MLLG-940A119F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLLG – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLG ML26-LG700-19W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A1 110°	19 19W	F On-Off A 0-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-LG925 Slim General Light Inset

New



ML26-LG925-26W

110° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- System: 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim

ON-OFF




0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-LG925 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	48V	90	2700K	110°	2200lm	1550lm	MLLG-927A126F-BN
				3000K	110°	2400lm	1600lm	MLLG-930A126F-BN
				4000K	110°	2600lm	1700lm	MLLG-940A126F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLLG – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLLG ML26-LG925-26W	927 CRI>90/ 2700K 930 CRI>90/ 3000K 940 CRI>90/ 4000K	A1 110°	26 26W	F On-Off A 0-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-GL280 & ML26-GL560 General Light Inset




ML26-GL280-7W ML26-GL560-13W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 450lm or 900lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-GL280 & ML26-GL560 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	110°	550lm	430lm	MLG1-927A107F-BN
				3000K	110°	600lm	400lm	MLG1-930A107F-BN
				4000K	110°	650lm	450lm	MLG1-940A107F-BN
12W	13W	48V	90	2700K	110°	1100lm	750lm	MLG2-927A113F-BN
				3000K	110°	1200lm	800lm	MLG2-930A113F-BN
				4000K	110°	1300lm	900lm	MLG2-940A113F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLG1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG1 ML26-GL280-7W General Light	**927** CRI>90/ 2700K	**A1** 110°	**07** 7W	**F** On-Off	**W** White	**N** None	
MLG2 ML26-GL560-13W General Light	**930** CRI>90/ 3000K		**13** 13W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-GL840 & ML26-GL1120 General Light Inset




ML26-GL840-19W ML26-GL1120-26W

110° | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info


- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 110°
- Lumen Output: Up to 1300lm or 1700lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-GL840 & ML26-GL1120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	110°	1700lm	1100lm	MLG3-927A119F-BN
				3000K	110°	1800lm	1200lm	MLG3-930A119F-BN
				4000K	110°	1900lm	1300lm	MLG3-940A119F-BN
24W	26W	48V	90	2700K	110°	2200lm	1500lm	MLG4-927A126F-BN
				3000K	110°	2400lm	1600lm	MLG4-930A126F-BN
				4000K	110°	2600lm	1700lm	MLG4-940A126F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLG3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLG3 ML26-GL840-19W General Light	**927** CRI>90/ 2700K	**A1** 110°	**19** 19W	**F** On-Off	**W** White	**N** None	
MLG4 ML26-GL1120-26W General Light	**930** CRI>90/ 3000K		**26** 26W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-CL280 & ML26-CL560 General Light Inset




ML26-CL280-7W ML26-CL560-13W

65° 2700K 3000K 4000K CRI >90 48V DC

IP20 CE CB UKCA Intertek SAMSUNG 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 65° (Microprismatic Cover Version)
- Lumen Output: Up to 420lm or 800lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-CL280 & ML26-CL560 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	65°	550lm	360lm	MLC1-9276507F-BN
				3000K	65°	600lm	380lm	MLC1-9306507F-BN
				4000K	65°	650lm	420lm	MLC1-9406507F-BN
12W	13W	48V	90	2700K	65°	1100lm	720lm	MLC2-9276513F-BN
				3000K	65°	1200lm	750lm	MLC2-9306513F-BN
				4000K	65°	1300lm	800lm	MLC2-9406513F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLC1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLC1 ML26-CL280-7W General Light	**927** CRI>90/ 2700K	**65** 65° Microprismatic Cover Version	**07** 7W	**F** On-Off	**W** White	**N** None	
MLC2 ML26-CL560-13W General Light	**930** CRI>90/ 3000K		**13** 13W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-CL840 & ML26-CL1120 General Light Inset




ML26-CL840-19W ML26-CL1120-26W

65° 2700K 3000K 4000K CRI >90 48V DC

IP20 CE CB UKCA Intertek SAMSUNG 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- System: 19W, 26W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 65° (Microprismatic Cover Version)
- Lumen Output: Up to 1200lm or 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish



White Black

Order Info (ML26-CL840 & ML26-CL1120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
18W	19W	48V	90	2700K	65°	1700lm	1000lm	MLC3-9276519F-BN
				3000K	65°	1800lm	1100lm	MLC3-9306519F-BN
				4000K	65°	1900lm	1200lm	MLC3-9406519F-BN
24W	26W	48V	90	2700K	65°	2200lm	1400lm	MLC4-9276526F-BN
				3000K	65°	2400lm	1500lm	MLC4-9306526F-BN
				4000K	65°	2600lm	1600lm	MLC4-9406526F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLC3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLC3 ML26-CL840-19W General Light	**927** CRI>90/ 2700K	**65** 65° Microprismatic Cover Version	**19** 19W	**F** On-Off	**W** White	**N** None	
MLC4 ML26-CL1120-26W General Light	**930** CRI>90/ 3000K		**26** 26W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-RB120 & ML26-RB150 Pendant Light Inset




ML26-RB120-5W
ML26-RB150-7W
(Frosted Glass)

300° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 300°
- Lumen Output: Up to 470lm or 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-PB120 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48V	90	2700K	300°	500lm	300lm	MLRB-927C005F-BN
				3000K	300°	550lm	350lm	MLRB-930C005F-BN
				4000K	300°	600lm	400lm	MLRB-940C005F-BN
6W	7W	48V	90	2700K	300°	600lm	500lm	MLRB-927C007F-BN
				3000K	300°	650lm	550lm	MLRB-930C007F-BN
				4000K	300°	700lm	600lm	MLRB-940C007F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLRB	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MLRB ML26-RB120-5W Pendant Spot		927 CRI>90/ 2700K	C0 300°	05 5W	F On-Off		W White	N None		
MLRB ML26-RB150-7W Pendant Spot		930 CRI>90/ 3000K		07 7W	A 0-10V Dim		B Black			
		940 CRI>90/ 4000K			D DALI Dim					

MODULINE 26 – ML26-PB120 & ML26-PB150 Decorative Ball Inset




ML26-PB120-5W
ML26-PB150-7W
(Frosted Glass)

300° | 2700K 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 80,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 300°
- Lumen Output: Up to 470lm or 550lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-PB120 & ML26-PB150 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4W	5W	48V	90	2700K	300°	500lm	300lm	MLPB-927C005F-BN
				3000K	300°	550lm	350lm	MLPB-930C005F-BN
				4000K	300°	600lm	400lm	MLPB-940C005F-BN
6W	7W	48V	90	2700K	300°	600lm	500lm	MLPB-927C007F-BN
				3000K	300°	650lm	550lm	MLPB-930C007F-BN
				4000K	300°	700lm	600lm	MLPB-940C007F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLPB	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MLPB ML26-PB120-5W		927 CRI>90/ 2700K	C0 300°	05 5W	F On-Off		W White	N None		
MLPB ML26-PB150-7W		930 CRI>90/ 3000K		07 7W	A 0-10V Dim		B Black			
		940 CRI>90/ 4000K			D DALI Dim					

MODULINE 26 – ML26-PS40 Pendant Spot Inset




ML26-PS40-12W

18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

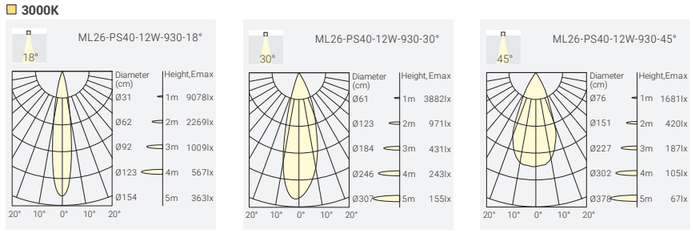

Finish



Black(B) White(W)

Order Info (ML26-PS40 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
11W	12W	48V	90	2700K	18°	1400lm	1000lm	MLP1-9271812F-BB
					30°	1400lm	1200lm	MLP1-9273012F-BB
					45°	1400lm	750lm	MLP1-9274512F-BB
				3000K	18°	1500lm	1050lm	MLP1-9301812F-BB
					30°	1500lm	1250lm	MLP1-9303012F-BB
					45°	1500lm	770lm	MLP1-9304512F-BB
				4000K	18°	1600lm	1100lm	MLP1-9401812F-BB
					30°	1600lm	1300lm	MLP1-9403012F-BB
					45°	1600lm	800lm	MLP1-9404512F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLP1	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MLP1 ML26-PS40-12W Pendant Spot		**927** CRI>90/ 2700K	**18** 18°	**12** 12W	**F** On-Off		**W** White	**B** Black		**H** Honeycomb
		930 CRI>90/ 3000K	**30** 30°		**A** 0-10V Dim		**B** Black			
		940 CRI>90/ 4000K	**45** 45°		**D** DALI Dim					

Optional accessary



Honeycomb

Code for MLP1-9301812F-BB with Honeycomb
MLP1-9301812F-BB-**H**

MODULINE 26 – ML26-PS55 Pendant Spot Inset




ML26-PS55-10W

18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

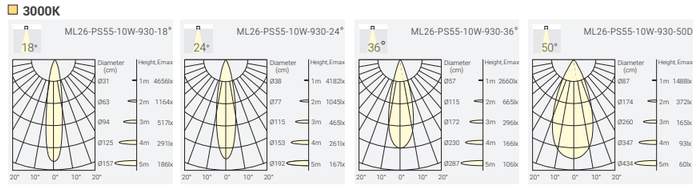

Finish



Black(B) White(W) Brushed Bronze(Z) Brushed Gold(G)

Order Info (ML26-PS55 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
9W	10W	48V	90	2700K	18°	1200lm	700lm	MLP4-9271810F-BB
					24°	1200lm	800lm	MLP4-9272410F-BB
					36°	1200lm	800lm	MLP4-9273610F-BB
					50°	1200lm	850lm	MLP4-9275010F-BB
				3000K	18°	1300lm	750lm	MLP4-9301810F-BB
					24°	1300lm	830lm	MLP4-9302410F-BB
					36°	1300lm	830lm	MLP4-9303610F-BB
					50°	1300lm	900lm	MLP4-9305010F-BB
				4000K	18°	1400lm	780lm	MLP4-9401810F-BB
					24°	1400lm	850lm	MLP4-9402410F-BB
					36°	1400lm	850lm	MLP4-9403610F-BB
					50°	1400lm	950lm	MLP4-9405010F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLP4	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MLP4 ML26-PS55-10W Pendant Spot		**927** CRI>90/ 2700K	**18** 18°	**10** 10W	**F** On-Off		**W** White	**B** Black		**H** Honeycomb
		930 CRI>90/ 3000K	**30** 30°		**A** 0-10V Dim		**B** Black			
		940 CRI>90/ 4000K	**36** 36°		**D** DALI Dim		**Z** Brushed Bronze			
			50 50°				**G** Brushed Gold			

Optional accessary



Honeycomb

Code for MLP4-9301810F-BB with Honeycomb
MLP4-9301810F-BB-**H**

MODULINE 26 – ML26-PS60 Pendant Light Inset




ML26-PS60-5W

18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 610lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K

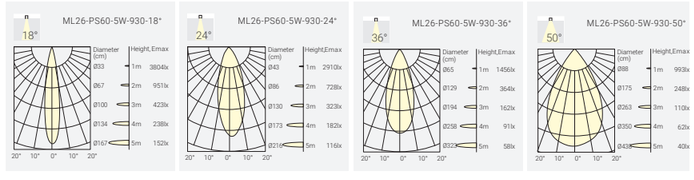

Finish



White Black

Order Info (ML26-PS60 in Black Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
4.5W	5W	48V	90	2700K	18°	700lm	530lm	MLP3-9271805F-BB
					24°	700lm	550lm	MLP3-9272405F-BB
					36°	700lm	550lm	MLP3-9273605F-BB
					50°	700lm	570lm	MLP3-9275005F-BB
				3000K	18°	750lm	550lm	MLP3-9301805F-BB
					24°	750lm	580lm	MLP3-9302405F-BB
					36°	750lm	580lm	MLP3-9303605F-BB
					50°	750lm	600lm	MLP3-9305005F-BB
				4000K	18°	800lm	570lm	MLP3-9401805F-BB
					24°	800lm	600lm	MLP3-9402405F-BB
					36°	800lm	600lm	MLP3-9403605F-BB
					50°	800lm	610lm	MLP3-9405005F-BB

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding


MLP3 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLP3 ML26-PS60-5W Pendant Spot	**927** CRI>90/ 2700K	**18** 18°	**05** 5W	**F** On-Off	**W** White	**B** Black	
	930 CRI>90/ 3000K	**24** 24°		**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K	**36** 36°		**D** DALI Dim			
		50 50°					

MODULINE 26 – ML26-WW280 & ML26-WW560 Wall Washer Inset



ML26-WW280-7W




ML26-WW560-13W

Wall Washer | 2700K 3000K 4000K | CRI >90 | 48V DC

IP20 | CE | CB | UKCA | ETL Intertek | SAMSUNG 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- System: 7W, 13W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: Wall Washer
- Lumen Output: Up to 450lm or 750lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim




Light Distribution


3000K

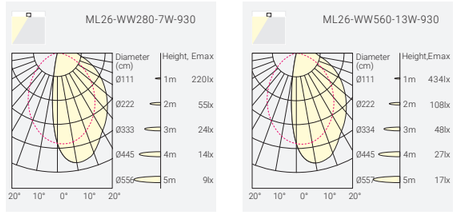

Finish



White Black

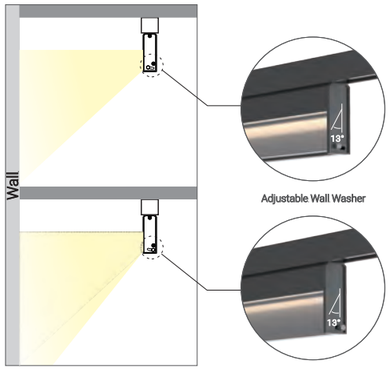

Order Info (ML26-WW280 & WW560 in Black Housing & Matt Reflector as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
6W	7W	48V	90	2700K	WW	550lm	330lm	MLW1-927WW07F-BM
				3000K	WW	600lm	350lm	MLW1-930WW07F-BM
				4000K	WW	650lm	450lm	MLW1-940WW07F-BM
12W	13W	48V	90	2700K	WW	1100lm	670lm	MLW2-927WW13F-BM
				3000K	WW	1200lm	700lm	MLW2-930WW13F-BM
				4000K	WW	1300lm	750lm	MLW2-940WW13F-BM

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MLW1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MLW1 ML26-WW280-7W	**927** CRI>90/ 2700K	**WW** Wall Washer	**07** 7W	**F** On-Off	**W** White	**M** Matt	
MLW2 ML26-WW560-13W	**930** CRI>90/ 3000K		**13** 13W	**A** 0-10V Dim	**B** Black		
	940 CRI>90/ 4000K			**D** DALI Dim			

MODULINE 26 – ML26-NHU12 Neon Strip Inset




ML26-NHU12-19W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NHU12 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	48V	90	3000K	360°	2200lm	1300lm	MNHU-930C619F-BN
				4000K	360°	2400lm	1400lm	MNHU-940C619F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)


Coding

MNHU	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
MNHU ML26-NHU12-19W Neon Strip		930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	19 19W	F On-Off A 0-10V Dim D DALI Dim		W White B Black	N None		



Project: Application reference

MODULINE 26 – ML26-NHP10 Neon Strip Inset




ML26-NHP10-14W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 14W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White



Black

Order Info (ML26-NHP10 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
13W	14W	48V	90	3000K	360°	1600lm	1000lm	MNHP-930C614F-BN
				4000K	360°	1700lm	1050lm	MNHP-940C614F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MNHP – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNHP ML26-NHP10-19W Neon Strip	930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	14 14W	F On-Off A 0-10V Dim D DALI Dim	W White B Black	N None	

MODULINE 26 – ML26-NVP12 Neon Strip Inset




ML26-NVP12-19W

360° | 3000K 4000K | CRI >90 | 48V DC | IP20 | CE | CB | UKCA | ETL Intertek | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- System: 19W, CRI>90
- CCT: 3000K, 4000K Available as Standard
- Beam Angle: 360°
- Lumen Output: Up to 1100lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish



White Black

Order Info (ML26-NVP12 in Black Housing as an Example)

LED Power	System Power	LED Voltage	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	48V	90	3000K	360°	2200lm	1050lm	MNVP-930C619F-BN
				4000K	360°	2400lm	1100lm	MNVP-940C619F-BN

Code Remark: F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

MNVP – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MNVP ML26-NVP12-19W Neon Strip	930 CRI>90/ 3000K 940 CRI>90/ 4000K	C6 360°	19 19W	F On-Off A 0-10V Dim D DALI Dim	W White B Black	N None	

DASH Smart

Up to 140 lm/W luminous efficacy
Designed for flexible accent lighting
Modular 3-phase linear tracklight system
Adjustable lumen packages via DIP switch
Chrome-black or specular reflector options
Uniform illumination with UGR<19 visual comfort



Project: Office Hünxe, Germany

DASH SMART – The Modular Design 3-phase Linear Tracklight







3-phase Track System

Global
Stucchi
Powergear

Linear Accent Light

80° beam angle, UGR<19
Uniform illumination and visual comfort
Reflector in Chrome Black or Specular
Housing color in Black or White
Lumen efficiency up to 140lm/W

Linear General Light

Within microprismatic cover,
to ensure homogeneous lighting
Housing color in Black or White
Lumen efficiency up to 120lm/W



In-Track LED Driver and Lamp Holder

DASH Smart 50W in-Track LED Driver (ON-OFF or DALI Dim)

·Dimension: 672mm x 13.8mm (31mm) x 31.5mm
·Maximum Secondary Power: 50.4W
·Output Voltage Range: 24-48V; Maximum Output Voltage: 60V
·Input Voltage: 220-240V~50/60Hz; Overvoltage Resistance: 320V, 1h
·Inrush current: 20A, 280μs
·Automatic Circuit Breaker: 22pcs on B16A, 37pcs on C16A

① Adjustable Output Current between 350-1050mA via DIP Switch
② L1, L2 and L3 phase switchable
③ Lamp Holder within GR6d Retaining Element for 3-phase Power Rails with Locking Mechanism


DASH SMART – The Modular Design 3-phase Linear Tracklight



80° | 3000K 4000K | CRI >80 | UGR<19 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- The Modular Design 3-phase Linear Tracklight
- Housing color in White or Black
- Reflector color in Chrome-black or Specular
- 80° beam angle and UGR<19
- Uniform illumination and visual comfort
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 140lm/W
- LED Driver: ON-OFF or DALI Dim



Light Distribution

3000K



Color Options



Black-Chrome Black Black-Specular White-Specular

Order Info (DSD26 in black housing & chrome-black reflector as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
864mm	DSD26-L090-83080N-BC	@350 mA	17W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24W	80	3000K	80°	3300lm
					4000K	80°	3600lm
1164mm	DSD26-L120-83080N-BC	@350 mA	17W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24W	80	3000K	80°	3300lm
					4000K	80°	3600lm
		@700 mA	34W	80	3000K	80°	4500lm
					4000K	80°	4900lm
1464mm	DSD26-L150-83080N-BC	@350 mA	17W	80	3000K	80°	2350lm
					4000K	80°	2500lm
		@500 mA	24W	80	3000K	80°	3300lm
					4000K	80°	3600lm
		@700 mA	34W	80	3000K	80°	4500lm
					4000K	80°	4900lm
		@1050 mA	50W	80	3000K	80°	7250lm
					4000K	80°	7500lm

Code Remark: N=N(No Driver) F=F(ON-OFF) D=D(DALI Dim)

Coding

DSD26-L*** — *** ** * – * *

Model	CRI/ CCT	Beam Angle	Control	Housing Finish	Reflector Color
DSD26-L090 DSD26 864mm	**830** CRI80/ 3000K	**80** 80°	**N** No Driver	**W** White	**C** Chrome Black
DSD26-L120 DSD26 1164mm	**840** CRI80/ 4000K		**F** On-Off	**B** Black	**S** Specular
DSD26-L150 DSD26 1464mm			**D** DALI Dim		


DASH SMART – The Modular Design 3-phase Linear Tracklight



90° | 3000K 4000K | CRI >80 | IP20 | CE | 5 YEARS GUARANTEE


Quick Info

- The Modular Design 3-phase Linear Tracklight
- Housing color in White or Black
- General Light in Microprismatic Cover
- 90° beam angle, homogeneous lighting
- CCT: 3000K, 4000K Available as Standard
- Lumen output adjustable via dip switch on LED driver
- Lumen efficiency up to 120lm/W
- LED Driver: ON-OFF or DALI Dim




Light Distribution

3000K



Color Options



Black White

Order Info (DSO26 in black housing as an example)

Length	Code	LED Current	System Power	CRI	CCT	Beam	System Output
864mm	DSO26-L090-83090N-BN	@350 mA	17W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24W	80	3000K	90°	2750lm
					4000K	90°	3000lm
1164mm	DSO26-L120-83090N-BN	@350 mA	17W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24W	80	3000K	90°	2750lm
					4000K	90°	3000lm
		@700 mA	34W	80	3000K	90°	3600lm
					4000K	90°	3900lm
1464mm	DSO26-L150-83090N-BN	@350 mA	17W	80	3000K	90°	2000lm
					4000K	90°	2200lm
		@500 mA	24W	80	3000K	90°	2750lm
					4000K	90°	3000lm
		@700 mA	34W	80	3000K	90°	3600lm
					4000K	90°	3900lm
		@1050 mA	50W	80	3000K	90°	5000lm
					4000K	90°	5500lm

Code Remark: N=N(No Driver) F=F(ON-OFF) D=D(DALI Dim)

Coding

DSO26-L*** — *** ** * – * *

Model	CRI/ CCT	Beam Angle	Control	Trim Finish	Reflector Color
DSO26-L090 DSO26 864mm	**830** CRI80/ 3000K	**90** 90°	**N** No Driver	**W** White	**N** None
DSO26-L120 DSO26 1164mm	**840** CRI80/ 4000K		**F** On-Off	**B** Black	
DSO26-L150 DSO26 1464mm			**D** DALI Dim		

PURE

LED Tracklight
Integrated LED Driver



Project: VALO Hotel, Helsinki, Finland

Project: Sara Kulturhus, Skellefteå, Sweden





Project: Maserati Showroom, Sofia, Bulgaria



PURE Art – LED Tracklight




18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 11W, 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim



Light Distribution

3000K

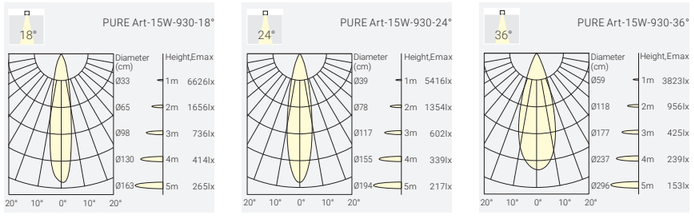

Finish



White

Black

Order Info (PURE Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	18°	1200lm	800lm	PUA2-9271811F-WB
						24°	1200lm	850lm	PUA2-9272411F-WB
						36°	1200lm	900lm	PUA2-9273611F-WB
						50°	1200lm	950lm	PUA2-9275011F-WB
					3000K	18°	1300lm	850lm	PUA2-9301811F-WB
						24°	1300lm	900lm	PUA2-9302411F-WB
						36°	1300lm	950lm	PUA2-9303611F-WB
						50°	1300lm	1000lm	PUA2-9305011F-WB
					4000K	18°	1400lm	900lm	PUA2-9401811F-WB
						30°	1400lm	950lm	PUA2-9402411F-WB
						36°	1400lm	1000lm	PUA2-9403611F-WB
						50°	1400lm	1050lm	PUA2-9405011F-WB
13W	15W	34V	350mA	90	2700K	18°	1700lm	1100lm	PUA2-9271815F-WB
						24°	1700lm	1150lm	PUA2-9272415F-WB
						36°	1700lm	1200lm	PUA2-9273615F-WB
						50°	1700lm	1250lm	PUA2-9275015F-WB
					3000K	18°	1800lm	1150lm	PUA2-9301815F-WB
						24°	1800lm	1200lm	PUA2-9302415F-WB
						36°	1800lm	1300lm	PUA2-9303615F-WB
						50°	1800lm	1350lm	PUA2-9305015F-WB
					4000K	18°	1900lm	1200lm	PUA2-9401815F-WB
						24°	1900lm	1250lm	PUA2-9402415F-WB
						36°	1900lm	1350lm	PUA2-9403615F-WB
						50°	1900lm	1400lm	PUA2-9405015F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Optional accessory



Code for PUA2-9302511F-WB with Honeycomb
PUA2-9302511F-WB-H

Honeycomb

Coding

PUA2 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUA2 PURE Art	927 CRI90/ 2700K	18 18°	11 11W	F On-Off	W White	B Black	H Honeycomb
	930 CRI90/3000K	24 24°	15 15W	P Phase Dim	B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

Project: Outsite Porto Mouco, Portugal

PURE S – LED Tracklight




15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 2300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim



Light Distribution

3000K

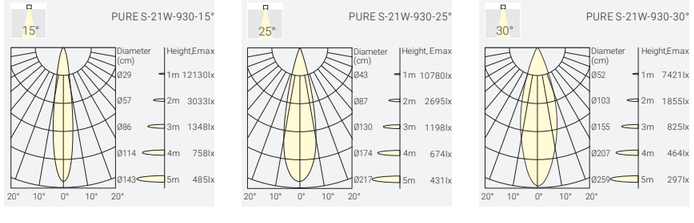

Finish



White Black

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	15°	1700lm	1300lm	PUS1-9271515F-WB
						25°	1700lm	1350lm	PUS1-9272515F-WB
						30°	1700lm	1450lm	PUS1-9273015F-WB
						50°	1700lm	1100lm	PUS1-9275015F-WB
					3000K	15°	1800lm	1350lm	PUS1-9301515F-WB
						25°	1800lm	1400lm	PUS1-9302515F-WB
						30°	1800lm	1450lm	PUS1-9303015F-WB
						50°	1800lm	1150lm	PUS1-9305015F-WB
					4000K	15°	1900lm	1400lm	PUS1-9401515F-WB
						25°	1900lm	1450lm	PUS1-9402515F-WB
						30°	1900lm	1500lm	PUS1-9403015F-WB
						50°	1900lm	1200lm	PUS1-9405015F-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1750lm	PUS2-9271521F-WB
						25°	2400lm	1950lm	PUS2-9272521F-WB
						30°	2400lm	2150lm	PUS2-9273021F-WB
						50°	4200lm	1450lm	PUS2-9275021F-WB
					3000K	15°	2500lm	1800lm	PUS2-9301521F-WB
						25°	2500lm	2100lm	PUS2-9302521F-WB
						30°	2500lm	2200lm	PUS2-9303021F-WB
						50°	2500lm	1500lm	PUS2-9305021F-WB
					4000K	15°	2600lm	1900lm	PUS2-9401521F-WB
						25°	2600lm	2200lm	PUS2-9402521F-WB
						30°	2600lm	2300lm	PUS2-9403021F-WB
						50°	2600lm	1600lm	PUS2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Optional accessory



Honeycomb

Code for PUS1-9301515F-WB with Honeycomb
PUS1-9301515F-WB-H

Coding

PUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUS1 PURE S-15W	927 CRI90/ 2700K	15 15°	15 15W	F On-Off	W White	B Black	H Honeycomb
PUS2 PURE S-21W	930 CRI90/3000K	24 24°	21 21W	P Phase Dim	B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

PURE S – LED Tracklight




15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | GLOBAL Inc | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 2300lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

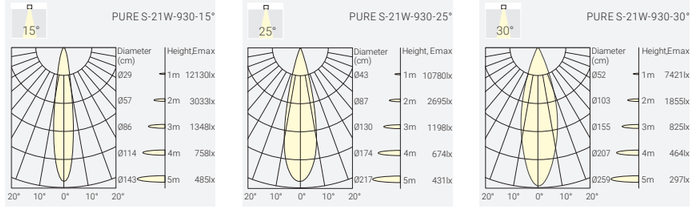

Finish



White Black

Order Info (PURE S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	250mA	90	2700K	15°	1700lm	1300lm	PUS1-9271515D-WB
						25°	1700lm	1350lm	PUS1-9272515D-WB
						30°	1700lm	1450lm	PUS1-9273015D-WB
						50°	1700lm	1100lm	PUS1-9275015D-WB
					3000K	15°	1800lm	1350lm	PUS1-9301515D-WB
						25°	1800lm	1400lm	PUS1-9302515D-WB
						30°	1800lm	1450lm	PUS1-9303015D-WB
						50°	1800lm	1150lm	PUS1-9305015D-WB
					4000K	15°	1900lm	1400lm	PUS1-9401515D-WB
						25°	1900lm	1450lm	PUS1-9402515D-WB
						30°	1900lm	1500lm	PUS1-9403015D-WB
						50°	1900lm	1200lm	PUS1-9405015D-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1750lm	PUS2-9271521D-WB
						25°	2400lm	1950lm	PUS2-9272521D-WB
						30°	2400lm	2150lm	PUS2-9273021D-WB
						50°	2400lm	1450lm	PUS2-9275021D-WB
					3000K	15°	2500lm	1800lm	PUS2-9301521D-WB
						25°	2500lm	2100lm	PUS2-9302521D-WB
						30°	2500lm	2200lm	PUS2-9303021D-WB
						50°	2500lm	1500lm	PUS2-9305021D-WB
					4000K	15°	2600lm	1900lm	PUS2-9401521D-WB
						25°	2600lm	2200lm	PUS2-9402521D-WB
						30°	2600lm	2300lm	PUS2-9403021D-WB
						50°	2600lm	1600lm	PUS2-9405021D-WB

Code Remark: D=D(DALI Dim)

Optional accessory



Honeycomb

Code for PUS1--9301515D-WB with Honeycomb
PUS1--9301515D-WB-H

Coding

PUS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUS1 PURE S-15W	927 CRI90/ 2700K	15 15°	15 15W	D DALI DIM	W White	B Black	H Honeycomb
PUS2 PURE S-21W	930 CRI90/3000K	24 24°	21 21W		B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

PURE M – LED Tracklight




18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



Light Distribution

3000K

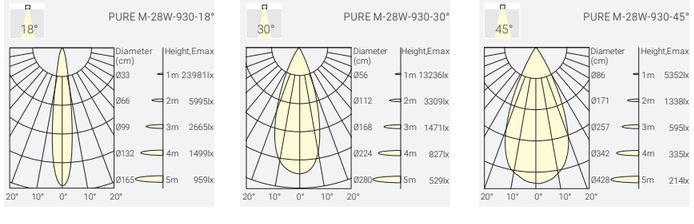

Finish



White Black

Order Info (PURE M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	18°	3700lm	3200lm	PUM1-9271828F-WB
						30°	3700lm	3300lm	PUM1-9273028F-WB
						45°	3700lm	3250lm	PUM1-9274528F-WB
					3000K	18°	3800lm	3300lm	PUM1-9301828F-WB
						30°	3800lm	3450lm	PUM1-9303028F-WB
						45°	3800lm	3350lm	PUM1-9304528F-WB
					4000K	18°	3900lm	3400lm	PUM1-9401828F-WB
						30°	3900lm	3550lm	PUM1-9403028F-WB
						45°	3900lm	3450lm	PUM1-9404528F-WB

Code Remark: F=F(ON-OFF)

Optional accessory



Honeycomb

Code for PUM1-9301828F-WB with Honeycomb
PUM1-9301828F-WB-H

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

PUM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUM1	927	18	28	F	W	B	H
PURE M	CRI90/ 2700K	18°	28W	On-Off	White	Black	Honeycomb
	930	30			B		
	CRI90/3000K	30°			Black		
	940	45					
	CRI90/ 4000K	45°					

PURE M – LED Tracklight




18° 30° 45° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | GLOBAL Inc | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 30°, 45°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

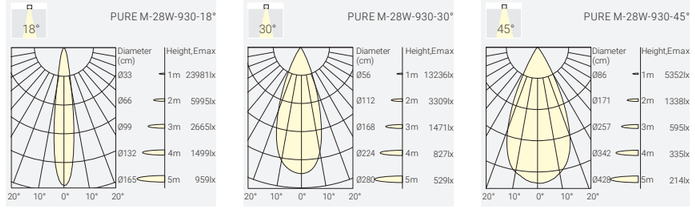

Finish



White Black

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	18°	3700lm	3200lm	PUM1-9271828D-WB
						30°	3700lm	3300lm	PUM1-9273028D-WB
						45°	3700lm	3250lm	PUM1-9274528D-WB
					3000K	18°	3800lm	3300lm	PUM1-9301828D-WB
						30°	3800lm	3450lm	PUM1-9303028D-WB
						45°	3800lm	3350lm	PUM1-9304528D-WB
					4000K	18°	3900lm	3400lm	PUM1-9401828D-WB
						30°	3900lm	3550lm	PUM1-9403028D-WB
						45°	3900lm	3450lm	PUM1-9404528D-WB

Code Remark: D=D(DALI Dim)

Optional accessory



Honeycomb

Code for PUM1--9301828D-WB with Honeycomb
PUM1--9301828D-WB-H

Track System



Compatible with GLOBAL 3-Circuit Track System

Coding

PUM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUM1	927	18	28	D	W	B	H
PURE M	CRI90/ 2700K	18°	28W	DALI DIM	White	Black	Honeycomb
	930	30			B		
	CRI90/3000K	30°			Black		
	940	45					
	CRI90/ 4000K	45°					

ROXY

In-track Driver LED Tracklight



Project: Kv Poolen, Sweden

Project: Tiffany & Co, Paris, France




ROXY Art – In-track Driver LED Tracklight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



Light Distribution

3000K

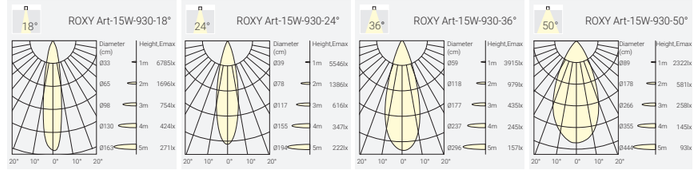

Finish



White Black

Order Info (ROXY Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1100lm	ROA1-9271815F-WB
						24°	1700lm	1150lm	ROA1-9272415F-WB
						36°	1700lm	1250lm	ROA1-9273615F-WB
						50°	1700lm	1350lm	ROA1-9275015F-WB
					3000K	18°	1800lm	1150lm	ROA1-9301815F-WB
						24°	1800lm	1200lm	ROA1-9302415F-WB
						36°	1800lm	1300lm	ROA1-9303615F-WB
						50°	1800lm	1400lm	ROA1-9305015F-WB
					4000K	18°	1900lm	1200lm	ROA1-9401815F-WB
						24°	1900lm	1250lm	ROA1-9402415F-WB
						36°	1900lm	1350lm	ROA1-9403615F-WB
						50°	1900lm	1450lm	ROA1-9405015F-WB

Code Remark: F=F(ON-OFF)

Optional accessory



Code for ROA1-9301815F-WB with Honeycomb
ROA1-9301815F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art	927 CRI90/ 2700K	18 18°	15 15W	F On-Off	W White	B Black	H Honeycomb
	930 CRI90/3000K	24 24°			B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					


ROXY Art – In-track Driver LED Tracklight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to 1450lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

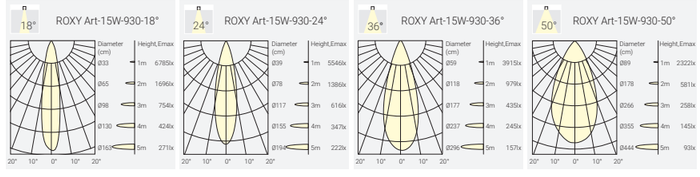

Finish



White Black

Order Info (ROXY Art in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1100lm	ROA1-9271815D-WB
						24°	1700lm	1150lm	ROA1-9272415D-WB
						36°	1700lm	1250lm	ROA1-9273615D-WB
						50°	1700lm	1350lm	ROA1-9275015D-WB
					3000K	18°	1800lm	1150lm	ROA1-9301815D-WB
						24°	1800lm	1200lm	ROA1-9302415D-WB
						36°	1800lm	1300lm	ROA1-9303615D-WB
						50°	1800lm	1400lm	ROA1-9305015D-WB
					4000K	18°	1900lm	1200lm	ROA1-9401815D-WB
						24°	1900lm	1250lm	ROA1-9402415D-WB
						36°	1900lm	1350lm	ROA1-9403615D-WB
						50°	1900lm	1450lm	ROA1-9405015D-WB

Code Remark: D=D(DALI Dim)

Optional accessory



Code for ROA1-9301815D-WB with Honeycomb
ROA1-9301815D-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROA1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROA1 ROXY Art	927 CRI90/ 2700K	18 18°	15 15W	D DALI Dim	W White	B Black	H Honeycomb
	930 CRI90/3000K	24 24°			B Black		
	940 CRI90/ 4000K	36 36°					
		50 50°					

ROXY S – In-track Driver LED Tracklight




15° 30° 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



Light Distribution

3000K

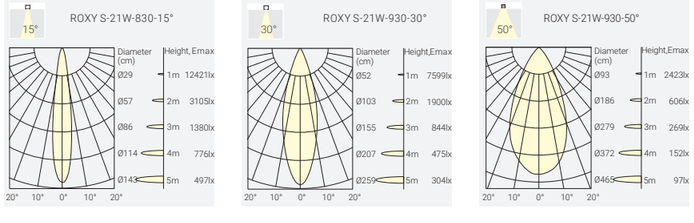

Finish



White Black

Order Info (ROXY S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	15°	1700lm	1350lm	ROS1-9271515F-WB
						30°	1700lm	1650lm	ROS1-9273015F-WB
						50°	1700lm	1100lm	ROS1-9275015F-WB
					3000K	15°	1800lm	1400lm	ROS1-9301515F-WB
						30°	1800lm	1700lm	ROS1-9303015F-WB
						50°	1800lm	1150lm	ROS1-9305015F-WB
					4000K	15°	1900lm	1450lm	ROS1-9401515F-WB
						30°	1900lm	1800lm	ROS1-9403015F-WB
						50°	1900lm	1200lm	ROS1-9405015F-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1800lm	ROS2-9271521F-WB
						30°	2400lm	2200lm	ROS2-9273021F-WB
						50°	2400lm	1600lm	ROS2-9275021F-WB
					3000K	15°	2500lm	1850lm	ROS2-9301521F-WB
						30°	2500lm	2300lm	ROS2-9303021F-WB
						50°	2500lm	1650lm	ROS2-9305021F-WB
					4000K	15°	2600lm	1900lm	ROS2-9401521F-WB
						30°	2600lm	2400lm	ROS2-9403021F-WB
						50°	2600lm	1700lm	ROS2-9405021F-WB

Code Remark: F=F(ON-OFF)

Optional accessory



Code for ROS1-9302515F-WB with Honeycomb
ROS1-9302515F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1 ROXY S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**F** On-Off	**W** White	**B** Black	**H** Honeycomb
ROS2 ROXY S-21W	**930** CRI90/3000K	**30** 30°	**21** 21W		**B** Black		
	940 CRI90/ 4000K	**50** 50°					

ROXY S – In-track Driver LED Tracklight




15° 30° 50° 2700K 3000K 4000K CRI >90 UGR<19

IP20 CE CB UKCA bridgelux 50,000h@L90B10 DALI 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

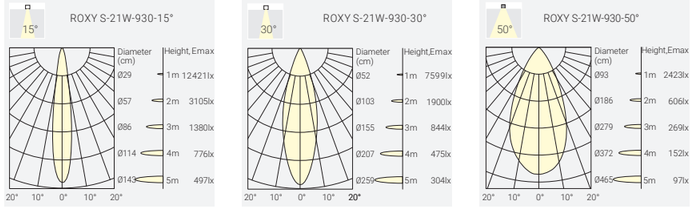

Finish



White Black

Order Info (ROXY S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	15°	1700lm	1350lm	ROS1-9271515D-WB
						30°	1700lm	1650lm	ROS1-9273015D-WB
						50°	1700lm	1100lm	ROS1-9275015D-WB
					3000K	15°	1800lm	1400lm	ROS1-9301515D-WB
						30°	1800lm	1700lm	ROS1-9303015D-WB
						50°	1800lm	1150lm	ROS1-9305015D-WB
					4000K	15°	1900lm	1450lm	ROS1-9401515D-WB
						30°	1900lm	1800lm	ROS1-9403015D-WB
						50°	1900lm	1200lm	ROS1-9405015D-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1800lm	ROS2-9271521D-WB
						30°	2400lm	2200lm	ROS2-9273021D-WB
						50°	2400lm	1600lm	ROS2-9275021D-WB
					3000K	15°	2500lm	1850lm	ROS2-9301521D-WB
						30°	2500lm	2300lm	ROS2-9303021D-WB
						50°	2500lm	1650lm	ROS2-9305021D-WB
					4000K	15°	2600lm	1900lm	ROS2-9401521D-WB
						30°	2600lm	2400lm	ROS2-9403021D-WB
						50°	2600lm	1700lm	ROS2-9405021D-WB

Code Remark: D=D(DALI Dim)

Optional accessory



Code for ROS1-9301515D-WB with Honeycomb
ROS1-9301515D-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
ROS1 ROXY S-15W	**927** CRI90/ 2700K	**15** 15°	**15** 15W	**D** DALI Dim	**W** White	**B** Black	**H** Honeycomb
ROS2 ROXY S-21W	**930** CRI90/3000K	**30** 30°	**21** 21W		**B** Black		
	940 CRI90/ 4000K	**50** 50°					

ROXY K – In-track Driver LED Tracklight




20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off



Light Distribution

3000K

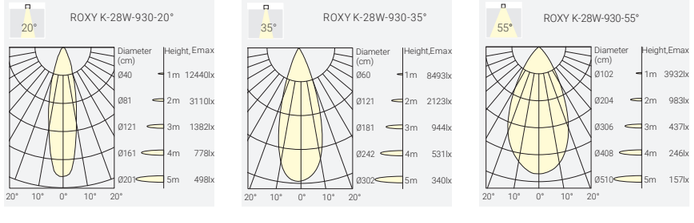

Finish



White Black

Order Info (ROXY K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	20°	3650lm	3000lm	ROK1-9272028F-WB
						35°	3650lm	3200lm	ROK1-9273528F-WB
						55°	3650lm	3050lm	ROK1-9275528F-WB
					3000K	20°	3800lm	3100lm	ROK1-9302028F-WB
						35°	3800lm	3300lm	ROK1-9303528F-WB
						55°	3800lm	3150lm	ROK1-9305528F-WB
					4000K	20°	3950lm	3200lm	ROK1-9402028F-WB
						35°	3950lm	3400lm	ROK1-9403528F-WB
						55°	3950lm	3250lm	ROK1-9405528F-WB

Code Remark: F=F(ON-OFF)

Optional accessory



Code for ROK1-9303528F-WB with Honeycomb
ROK1-9303528F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

ROK1	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
ROK1 ROXY K		927 CRI90/ 2700K 930 CRI90/3000K 940 CRI90/ 4000K	20 20° 35 35° 55 55°	28 28W	F On-Off		W White B Black	B Black		H Honeycomb

ROXY K – In-track Driver LED Tracklight




20° 35° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | DALI 2 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 28W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 35°, 55°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP20
- LED Driver: DALI Dim



Light Distribution

3000K

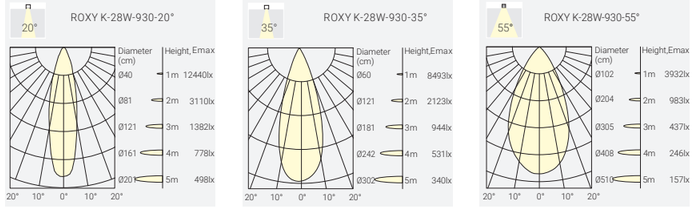

Finish



White Black

Order Info (ROXY K in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	35V	700mA	90	2700K	20°	3650lm	3000lm	ROK1-9272028D-WB
						35°	3650lm	3200lm	ROK1-9273528D-WB
						55°	3650lm	3050lm	ROK1-9275528D-WB
					3000K	20°	3800lm	3100lm	ROK1-9302028D-WB
						35°	3800lm	3300lm	ROK1-9303528D-WB
						55°	3800lm	3150lm	ROK1-9305528D-WB
					4000K	20°	3950lm	3200lm	ROK1-9402028D-WB
						35°	3950lm	3400lm	ROK1-9403528D-WB
						55°	3950lm	3250lm	ROK1-9405528D-WB

Code Remark: D=D(DALI Dim)

Optional accessory



Code for ROK1-9303528D-WB with Honeycomb
ROK1-9303528D-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding


ROK1	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
ROK1 ROXY K		927 CRI90/ 2700K 930 CRI90/3000K 940 CRI90/ 4000K	20 20° 35 35° 55 55°	28 28W	D DALI Dim		W White B Black	B Black		H Honeycomb

ROXY – In-track Driver LED Tracklight

Beam Angle Zooming Version





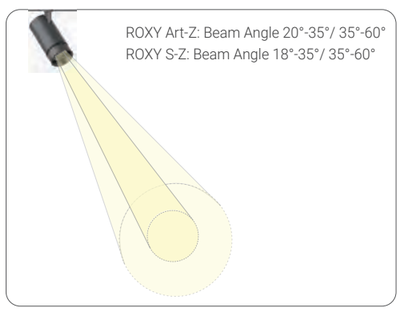



18°-60° Zooming

ROXY Art-Z

15W 1500lm-1600lm
20°-35° Zooming
35°-60° Zooming



ROXY S-Z

15W 1600lm-1700lm
21W 1200lm-2400lm
18°-35° Zooming
35°-60° Zooming


ROXY Art-Z – In-track Driver LED Tracklight




20°-35° | 35°-60° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°-35°, 35°-60°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off , DALI Dim






20°-60° Zooming

Light Distribution

3000K

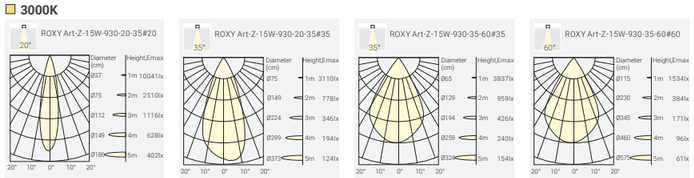

Order Info (ROXY Art-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°-35°	1700lm	1500lm	ROA1-927Z315F-WB
					3000K	20°-35°	1800lm	1550lm	ROA1-930Z315F-WB
					4000K	20°-35°	1900lm	1600lm	ROA1-940Z315F-WB
					2700K	35°-60°	1700lm	1350lm	ROA1-927Z615F-WB
					3000K	35°-60°	1800lm	1400lm	ROA1-930Z615F-WB
					4000K	35°-60°	1900lm	1450lm	ROA1-940Z615F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Finish



White

Black

Coding

ROA1	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
ROA1		**927**		**Z3**		**15**		**F**		**W**		**B**		**H**
ROXY Art-Z		CRI90/ 2700K		20°-35°		15W		On-Off		White		Black		Honeycomb
		930		**Z6**				**D**		**B**				
		CRI90/3000K		35°-60°				DALI Dim		Black				
		940												
		CRI90/ 4000K												

Optional accessory



Code for ROA1-930Z315F-WB with Honeycomb
ROA1-930Z315F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System


ROXY S-Z – In-track Driver LED Tracklight




18°-35° | 35°-60° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE

Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°-35°, 35°-60°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off , DALI Dim






20°-60° Zooming

Light Distribution

3000K

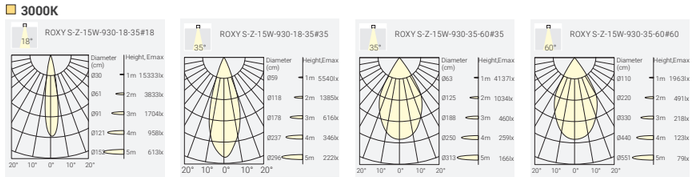

Order Info (ROXY S-Z in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°-35°	1700lm	1600lm	ROS1-927Z315F-WB
					3000K	18°-35°	1800lm	1650lm	ROS1-930Z315F-WB
					4000K	18°-35°	1900lm	1700lm	ROS1-940Z315F-WB
					2700K	35°-60°	1700lm	1450lm	ROS1-927Z615F-WB
					3000K	35°-60°	1800lm	1500lm	ROS1-930Z615F-WB
					4000K	35°-60°	1900lm	1550lm	ROS1-940Z615F-WB
18W	21W	35V	500mA	90	2700K	18°-35°	2400lm	2200lm	ROS1-927Z321F-WB
					3000K	18°-35°	2500lm	2300lm	ROS1-930Z321F-WB
					4000K	18°-35°	2600lm	2400lm	ROS1-940Z321F-WB
					2700K	35°-60°	2400lm	1950lm	ROS1-927Z621F-WB
					3000K	35°-60°	2500lm	2000lm	ROS1-930Z621F-WB
					4000K	35°-60°	2600lm	2050lm	ROS1-940Z621F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Finish



White



Black

Coding

ROS1	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
ROS1		**927**		**Z3**		**15**		**F**		**W**		**B**		**H**
ROXY S-Z		CRI90/ 2700K		18°-35°		15W		On-Off		White		Black		Honeycomb
		930		**Z6**		**21**		**D**		**B**				
		CRI90/3000K		35°-60°		21W		DALI Dim		Black				
		940												
		CRI90/ 4000K												

Optional accessory



Code for ROS1-930Z315F-WB with Honeycomb
ROS1-930Z315F-WB-H

Honeycomb

Track System



Compatible with GLOBAL / POWERGEAR
3-Circuit Track System

MISSION

For Energy and Cost Savings
Up to 130lm/W Luminous Efficiency
High-Efficiency In-Track Driver LED Tracklight



MISSION – In-track Driver LED Tracklight


Project: Application reference



MISSION S – In-track Driver LED Tracklight

New






20° 40° 60° 2700K 3000K 4000K CRI >90 IP20 CE bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- In-Track LED driver for simplified design
- High efficiency lighting solution
- Bridgelux LED: 17W, 28W; CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 40°, 60°
- Lumen Output: Up to 4100lm System Luminous Flux
- LED Driver: ON-OFF, DALI Dim

Light Distribution

3000K







Finish



White



Black

Order Info (MISSION S in Black Housing & Black Ring as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
17W	19W	34V	500mA	90	2700K	20°	2800lm	2400lm	MIS1-9272019F-BB
						40°	2800lm	2400lm	MIS1-9274019F-BB
						60°	2800lm	2400lm	MIS1-9276019F-BB
					3000K	20°	2900lm	2500lm	MIS1-9302019F-BB
						40°	2900lm	2500lm	MIS1-9304019F-BB
						60°	2900lm	2500lm	MIS1-9306019F-BB
					4000K	20°	3000lm	2600lm	MIS1-9402019F-BB
						40°	3000lm	2600lm	MIS1-9404019F-BB
						60°	3000lm	2600lm	MIS1-9406019F-BB
28W	31W	35V	800mA	90	2700K	20°	4400lm	3800lm	MIS2-9272031F-BB
						40°	4400lm	3800lm	MIS2-9274031F-BB
						60°	4400lm	3800lm	MIS2-9276031F-BB
					3000K	20°	4500lm	4000lm	MIS2-9302031F-BB
						40°	4500lm	4000lm	MIS2-9304031F-BB
						60°	4500lm	4000lm	MIS2-9306031F-BB
					4000K	20°	4600lm	4100lm	MIS2-9402031F-BB
						40°	4600lm	4100lm	MIS2-9404031F-BB
						60°	4600lm	4100lm	MIS2-9406031F-BB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Track System



3-Circuits

Compatible with GLOBAL / POWERGEAR 3-Circuit Track System

Coding

MIS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Ring Color	Accessory
MIS1 MISSION S-19W	**927** CRI90/ 2700K	**20** 20°	**19** 19W	**F** On-Off	**W** White	**W** White	
MIS2 MISSION S-31W	**930** CRI90/ 3000K	**40** 40°	**31** 31W	**D** DALI Dim	**B** Black	**B** Black	
	940 CRI90/ 4000K	**60** 60°					



KENZO

Recessed Adjustable Spotlight
Powerful Light & Energy Efficient
Suitable for Any Architectural Ambience



Project: Neto Finance, Bnei Brak, Israel

KENZO – Recessed Adjustable Spotlight

Project: Pinto Architectural and Design Agency, Paris, France



KENZO K1X30 – Recessed Adjustable Spotlight





15° 30° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | CREE 50,000h@L90B10 | 0-90° 350° | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø46mm for Trim Version
- CREE LED: 4W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 30°, 50°
- Lumen Output: Up to 350lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim







Light Distribution

2700K








Housing Finish



White Black

Reflector Options



Black Gold White

Optional accessory



Code for K1S-9405504N-WG with Honeycomb
K1S-9405504N-WG-H

Honeycomb

Order Info (KENZO K1X30 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
4W	6W	12V	350mA	90	2700K	15°	350lm	300lm	K1S-9271504N-WB
						30°	350lm	300lm	K1S-9273004N-WB
						55°	350lm	300lm	K1S-9275504N-WB
					3000K	15°	400lm	320lm	K1S-9301504N-WB
						30°	400lm	320lm	K1S-9303004N-WB
						55°	400lm	320lm	K1S-9305504N-WB
					4000K	15°	450lm	350lm	K1S-9401504N-WB
						30°	450lm	350lm	K1S-9403004N-WB
						55°	450lm	350lm	K1S-9405504N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

K1S – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1S KENZO K1X30	**927** CRI>90/ 2700K	**15** 15°	**04** 4W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**30** 30°		**F** On-Off	**B** Black	**W** White	
	940 CRI>90/ 4000K	**55** 55°		**P** Phase Dim		**G** Gold	
				A 0-10V Dim			
				D DALI Dim			

KENZO K1X55 – Recessed Adjustable Spotlight





18° 24° 36° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 0-90° 350° | 5 YEARS GUARANTEE

Quick Info


- Ceiling Cut-out: Ø80mm for Trim Version
- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 24°, 36°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim







Light Distribution

3000K







Housing Finish



White Black

Reflector Options



Black Gold White

Optional accessory



Code for K1M-9402409N-WG with Honeycomb
K1M-9402409-WG-H

Honeycomb

Order Info (KENZO K1X55 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	34V	250mA	90	2700K	18°	1200lm	760lm	K1M-9271809N-WB
						24°	1200lm	800lm	K1M-9272409N-WB
						36°	1200lm	880lm	K1M-9273609N-WB
					3000K	18°	1300lm	800lm	K1M-9301809N-WB
						24°	1300lm	850lm	K1M-9302409N-WB
						36°	1300lm	920lm	K1M-9303609N-WB
					4000K	18°	1400lm	820lm	K1M-9401809N-WB
						24°	1400lm	870lm	K1M-9402409N-WB
						36°	1400lm	950lm	K1M-9403609N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

K1M – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1M KENZO K1X55	**927** CRI>90/ 2700K	**18** 18°	**09** 9W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
	930 CRI>90/ 3000K	**24** 24°		**F** On-Off	**B** Black	**W** White	
	940 CRI>90/ 4000K	**36** 36°		**P** Phase Dim		**G** Gold	
				A 0-10V Dim			
				D DALI Dim			


KENZO K1X70 – Recessed Adjustable Spotlight



15° 25° 30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 0-90° 350° | 5 YEARS GUARANTEE


Quick Info

- Ceiling Cut-out: Ø100mm for Trim Version
- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 25°, 30°
- Lumen Output: Up to 2200lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim, Casambi Wireless Dim



Light Distribution

2700K

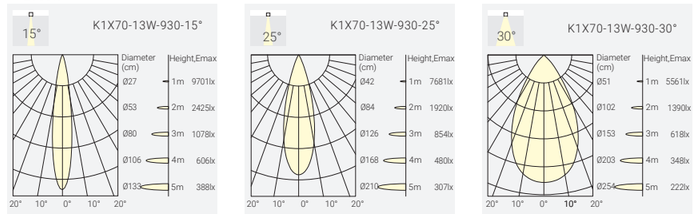

Housing Finish



White Black

Reflector Options



Black Gold White

Optional accessory



Code for K1L2-9403018N-WG with Honeycomb
K1L2-9403018N-WG-H

Honeycomb

Order Info (KENZO K1X70 in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	15°	1700lm	1200lm	K1L1-9271513N-WB
						25°	1700lm	1350lm	K1L1-9272513N-WB
						30°	1700lm	1550lm	K1L1-9273013N-WB
					3000K	15°	1800lm	1300lm	K1L1-9301513N-WB
						25°	1800lm	1450lm	K1L1-9302513N-WB
						30°	1800lm	1600lm	K1L1-9303013N-WB
					4000K	15°	1900lm	1350lm	K1L1-9401513N-WB
						25°	1900lm	1500lm	K1L1-9402513N-WB
						30°	1900lm	1650lm	K1L1-9403013N-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1650lm	K1L2-9271518N-WB
						25°	2400lm	1850lm	K1L2-9272518N-WB
						30°	2400lm	2000lm	K1L2-9273018N-WB
					3000K	15°	2500lm	1700lm	K1L2-9301518N-WB
						25°	2500lm	1900lm	K1L2-9302518N-WB
						30°	2500lm	2100lm	K1L2-9303018N-WB
					4000K	15°	2600lm	1750lm	K1L2-9401518N-WB
						25°	2600lm	2000lm	K1L2-9402518N-WB
						30°	2600lm	2200lm	K1L2-9403018N-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

K1L1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Trim Finish	Reflector Color	Accessory
K1L1 K1X70-13W	**927** CRI>90/ 2700K	**15** 15°	**13** 13W	**N** No Driver	**W** White	**B** Black	**H** Honeycomb
K1L2 K1X70-18W	**930** CRI>90/ 3000K	**25** 25°	**18** 18W	**F** On-Off	**B** Black	**W** White	
	940 CRI>90/ 4000K	**30** 30°		**P** Phase Dim		**G** Gold	
				A 0-10V Dim			
				D DALI Dim			







PURE-25 40 55

Three sizes in Ø25 / Ø40 / Ø55 mm
Directional spotlight with compact form
Semi-recessed & ceiling-mounted versions
High visual comfort with focused light output



PURE 25-R – Semi-Recessed Spotlight




24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 36°, 50°
- Lumen Output: Up to 400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

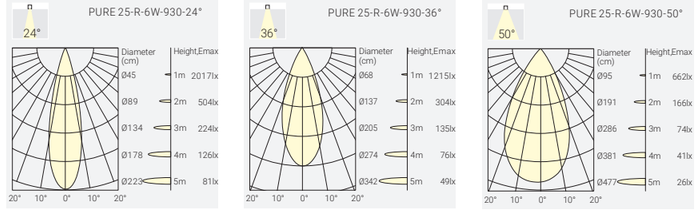

Finish



White Black

Order Info (PURE 25-R in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5W	6W	34V	150mA	90	2700K	24°	550lm	400lm	PU2R-9272406F-WB
						36°	550lm	490lm	PU2R-9273606F-WB
						50°	550lm	440lm	PU2R-9275006F-WB
					3000K	24°	600lm	420lm	PU2R-9302406F-WB
						36°	600lm	510lm	PU2R-9303606F-WB
						50°	600lm	460lm	PU2R-9305006F-WB
					4000K	24°	650lm	430lm	PU2R-9402406F-WB
						36°	650lm	540lm	PU2R-9403606F-WB
						50°	650lm	480lm	PU2R-9405006F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessory



Code for PUAC-9302406F-WB with Honeycomb
PUAC-9302406F-WB-H


Honeycomb

Coding

PU2R – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU2R PURE 25-R	927 CRI90/ 2700K 930 CRI90/3000K 940 CRI90/ 4000K	24 24° 36 36° 50 50°	06 6W	F On-Off P Phase Dim A 0-10V Dim D DALI Dim	W White B Black	B Black	H Honeycomb

PURE 40-R – Semi-Recessed Spotlight




24° 40° 60° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 10W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°, 60°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

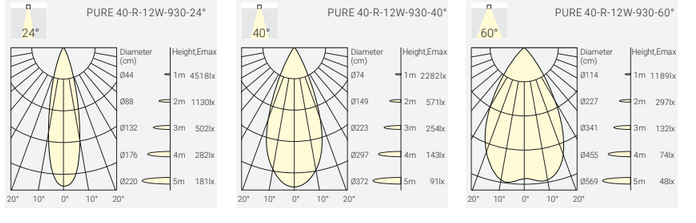

Finish



White Black

Order Info (PURE 40-R in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10W	12W	34V	300mA	90	2700K	24°	1400lm	1050lm	PU4R-9272412F-WB
						40°	1400lm	1050lm	PU4R-9274012F-WB
						60°	1400lm	1050lm	PU4R-9276012F-WB
					3000K	24°	1500lm	1100lm	PU4R-9302412F-WB
						40°	1500lm	1100lm	PU4R-9304012F-WB
						60°	1500lm	1100lm	PU4R-9306012F-WB
					4000K	24°	1600lm	1150lm	PU4R-9402412F-WB
						40°	1600lm	1150lm	PU4R-9404012F-WB
						60°	1600lm	1150lm	PU4R-9406312F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessory



Code for PU4R-9302412F-WB with Honeycomb
PU4R-9302412F-WB-H

Honeycomb

Coding

PU4R – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU4R PURE 40-R	927 CRI90/ 2700K 930 CRI90/3000K 940 CRI90/ 4000K	24 24° 40 40° 60 60°	12 12W	F On-Off P Phase Dim A 0-10V Dim D DALI Dim	W White B Black	B Black	H Honeycomb


PURE 55-R – Semi-Recessed Spotlight



20° 32° 55° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 32°, 55°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim




Light Distribution

3000K







Finish



White Black

Order Info (PURE 55-R in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°	1700lm	1500lm	PU5R-9272015F-WB
						32°	1700lm	1500lm	PU5R-9273215F-WB
						55°	1700lm	1500lm	PU5R-9275515F-WB
					3000K	20°	1800lm	1550lm	PU5R-9302015F-WB
						32°	1800lm	1550lm	PU5R-9303215F-WB
						55°	1800lm	1550lm	PU5R-9305515F-WB
					4000K	20°	1900lm	1600lm	PU5R-9402015F-WB
						32°	1900lm	1600lm	PU5R-9403215F-WB
						55°	1900lm	1600lm	PU5R-9405515F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessory



Code for PU5R-9302015F-WB with Honeycomb
PU5R-9302015F-WB-H

Honeycomb

Coding

PU5R – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU5R PURE 55-R	927 CRI90/ 2700K	20 20°	15 15W	F On-Off	W White	B Black	H Honeycomb
	930 CRI90/3000K	32 32°		P Phase Dim	B Black		
	940 CRI90/ 4000K	55 55°		A 0-10V Dim			
				D DALI Dim			

PURE 25-R



PURE 40-R



PURE 55-R




PURE 40-C – Ceiling Mounted Spotlight



24° 40° 60° 2700K 3000K 4000K CRI >90 UGR<19 IP20 CE CB UKCA bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 12W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 24°, 40°, 60°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

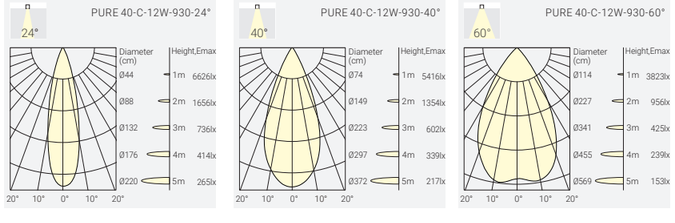

Finish



White Black

Order Info (PURE 40-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
10W	12W	34V	300mA	90	2700K	24°	1400lm	1050lm	PU4C-9272412F-WB
						40°	1400lm	1050lm	PU4C-9274012F-WB
						60°	1400lm	1050lm	PU4C-9276012F-WB
					3000K	24°	1500lm	1100lm	PU4C-9302412F-WB
						40°	1500lm	1100lm	PU4C-9304012F-WB
						60°	1500lm	1100lm	PU4C-9306012F-WB
					4000K	24°	1600lm	1150lm	PU4C-9402412F-WB
						40°	1600lm	1150lm	PU4C-9404012F-WB
						60°	1600lm	1150lm	PU4C-9406312F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for PU4C-9302412F-WB with Honeycomb
PU4C-9302412F-WB-H

Coding

PU4C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU4C PURE 40-C	927 CRI90/ 2700K	24 24°	12 12W	F On-Off	W White	B Black	H Honeycomb
	930 CRI90/3000K	40 40°		P Phase Dim	B Black		
	940 CRI90/ 4000K	60 60°		A 0-10V Dim			
				D DALI Dim			


PURE 55-C – Ceiling Mounted Spotlight



20° 32° 55° 2700K 3000K 4000K CRI >90 UGR<19 IP20 CE CB UKCA bridgelux 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 20°, 32°, 55°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K

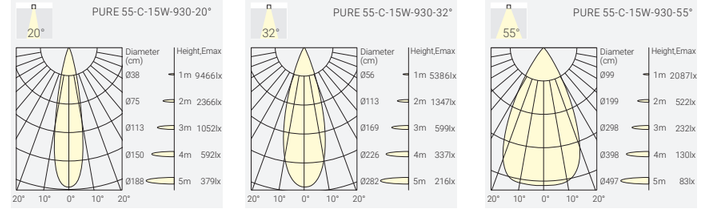

Finish



White Black

Order Info (PURE 55-R in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	20°	1700lm	1500lm	PU5C-9272015F-WB
						32°	1700lm	1500lm	PU5C-9273215F-WB
						55°	1700lm	1500lm	PU5C-9275515F-WB
					3000K	20°	1800lm	1550lm	PU5C-9302015F-WB
						32°	1800lm	1550lm	PU5C-9303215F-WB
						55°	1800lm	1550lm	PU5C-9305515F-WB
					4000K	20°	1900lm	1600lm	PU5C-9402015F-WB
						32°	1900lm	1600lm	PU5C-9403215F-WB
						55°	1900lm	1600lm	PU5C-9405515F-WB

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Optional accessory



Honeycomb

Code for PU5C-9302015F-WB with Honeycomb
PU5C-9302015F-WB-H

Coding

PU5C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PU5C PURE 55-C	927 CRI90/ 2700K	20 20°	15 15W	F On-Off	W White	B Black	H Honeycomb
	930 CRI90/3000K	32 32°		P Phase Dim	B Black		
	940 CRI90/ 4000K	55 55°		A 0-10V Dim			
				D DALI Dim			

PURE-C

No Visible Screw
Integrated LED Driver
Ceiling Mounted Spotlight



Project: Clarence House, Manchester, UK


PURE Art-C – Ceiling Mounted Spotlight



18° 24° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 18°, 24°, 36°, 50°
- Lumen Output: Up to1400lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim



Light Distribution

3000K

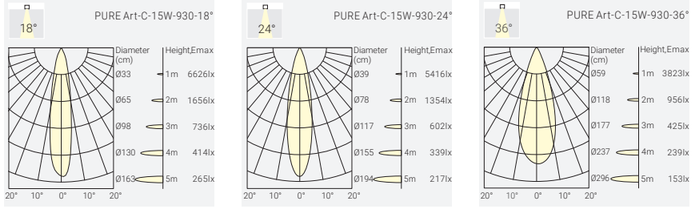

Finish



White Black

Optional accessory



Code for PUAC-9302511F-WB with Honeycomb
PUAC-9302511F-WB-H

Honeycomb

Order Info (PURE Art-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	350mA	90	2700K	18°	1700lm	1100lm	PUAC-9271815F-WB
						24°	1700lm	1150lm	PUAC-9272415F-WB
						36°	1700lm	1200lm	PUAC-9273615F-WB
						50°	1700lm	1250lm	PUAC-9275015F-WB
					3000K	18°	1800lm	1150lm	PUAC-9301815F-WB
						24°	1800lm	1200lm	PUAC-9302415F-WB
						36°	1800lm	1300lm	PUAC-9303615F-WB
						50°	1800lm	1350lm	PUAC-9305015F-WB
					4000K	18°	1900lm	1200lm	PUAC-9401815F-WB
						24°	1900lm	1250lm	PUAC-9402415F-WB
						36°	1900lm	1350lm	PUAC-9403615F-WB
						50°	1900lm	1400lm	PUAC-9405015F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim)

Coding

PUAC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUAC PURE Art-C	927 CRI90/ 2700K 930 CRI90/3000K 940 CRI90/ 4000K	18 18° 24 24° 36 36° 50 50°	15 15W	F On-Off P Phase Dim	W White B Black	B Black	H Honeycomb


PURE S-C – Ceiling Mounted Spotlight



15° 25° 30° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | CB | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 15W, 21W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 15°, 25°, 30°, 50°
- Lumen Output: Up to 2300lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

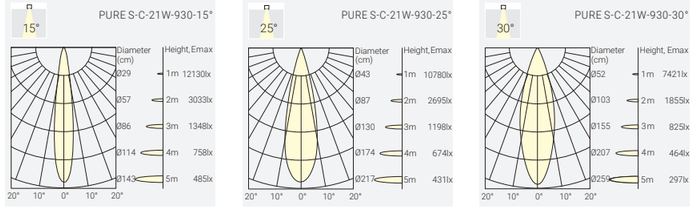

Finish



White Black

Optional accessory



Code for PUAC-9302515F-WB with Honeycomb
PUAC-9302515F-WB-H

Honeycomb

Order Info (PURE S-C in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	34V	250mA	90	2700K	15°	1700lm	1300lm	PUSC-9271515F-WB
						25°	1700lm	1350lm	PUSC-9272515F-WB
						30°	1700lm	1450lm	PUSC-9273015F-WB
						50°	1700lm	1100lm	PUSC-9275015F-WB
					3000K	15°	1800lm	1350lm	PUSC-9301515F-WB
						25°	1800lm	1400lm	PUSC-9302515F-WB
						30°	1800lm	1450lm	PUSC-9303015F-WB
						50°	1800lm	1150lm	PUSC-9305015F-WB
					4000K	15°	1900lm	1400lm	PUSC-9401515F-WB
						25°	1900lm	1450lm	PUSC-9402515F-WB
						30°	1900lm	1500lm	PUSC-9403015F-WB
						50°	1900lm	1200lm	PUSC-9405015F-WB
18W	21W	35V	500mA	90	2700K	15°	2400lm	1750lm	PUSC-9271521F-WB
						25°	2400lm	1950lm	PUSC-9272521F-WB
						30°	2400lm	2150lm	PUSC-9273021F-WB
						50°	2400lm	1450lm	PUSC-9275021F-WB
					3000K	15°	2500lm	1800lm	PUSC-9301521F-WB
						25°	2500lm	2100lm	PUSC-9302521F-WB
						30°	2500lm	2200lm	PUSC-9303021F-WB
						50°	2500lm	1500lm	PUSC-9305021F-WB
					4000K	15°	2600lm	1900lm	PUSC-9401521F-WB
						25°	2600lm	2200lm	PUSC-9402521F-WB
						30°	2600lm	2300lm	PUSC-9403021F-WB
						50°	2600lm	1600lm	PUSC-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

PUSC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
PUSC PURE-S-C	927 CRI90/ 2700K 930 CRI90/3000K 940 CRI90/ 4000K	15 15° 25 25° 30 30° 50 50°	15 15W 21 21W	F On-Off P Phase Dim D DALI Dim	W White B Black	B Black	H Honeycomb

MIU

Screw-Free Design
Ceiling & Pendant Versions
Elegant Minimalist Aesthetic



Project: Borg Forvaltning Office, Trondheim, Norway

MIU-C M – Ceiling Mounted Light




15° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 2050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

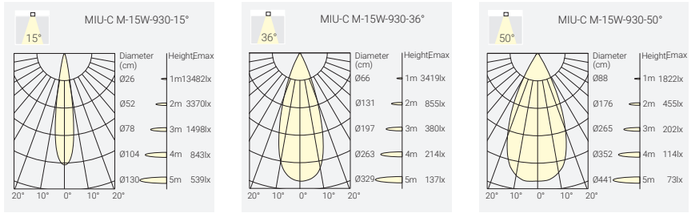

Finish



White Black

Order Info (MIU-C M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1500lm	1250lm	MCM1-9271515F-WB
						36°	1500lm	1300lm	MCM1-9273615F-WB
						50°	1500lm	1250lm	MCM1-9275015F-WB
					3000K	15°	1600lm	1350lm	MCM1-9301515F-WB
						36°	1600lm	1400lm	MCM1-9303615F-WB
						50°	1600lm	1350lm	MCM1-9305015F-WB
					4000K	15°	1700lm	1450lm	MCM1-9401515F-WB
						36°	1700lm	1500lm	MCM1-9403615F-WB
						50°	1700lm	1450lm	MCM1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	2100lm	1850lm	MCM2-9271521F-WB
						36°	2100lm	1950lm	MCM2-9273621F-WB
						50°	2100lm	1850lm	MCM2-9275021F-WB
					3000K	15°	2200lm	1950lm	MCM2-9301521F-WB
						36°	2200lm	2050lm	MCM2-9303621F-WB
						50°	2200lm	1950lm	MCM2-9305021F-WB
					4000K	15°	2300lm	2050lm	MCM2-9401521F-WB
						36°	2300lm	2150lm	MCM2-9403621F-WB
						50°	2300lm	2050lm	MCM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MCM1	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MCM1 MIU-C M-15W		927 CRI90/ 2700K	15 15°	15 15W	F On-Off		W White	W White		H Honeycomb
MCM2 MIU-C M-21W		930 CRI90/ 3000K	36 36°	21 21W	P* Phase Dim		B Black	B Black		
		940 CRI90/ 4000K	50 50°		D* DALI Dim			G Gold		

* 21W is not available with Phase Dim, DALI Dim

Optional accessory



Honeycomb

Code for MCM1-9301515F-WB with Honeycomb
MCM1-9301515F-WB-H

MIU-C L – Ceiling Mounted Light




18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 3250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim



Light Distribution

3000K

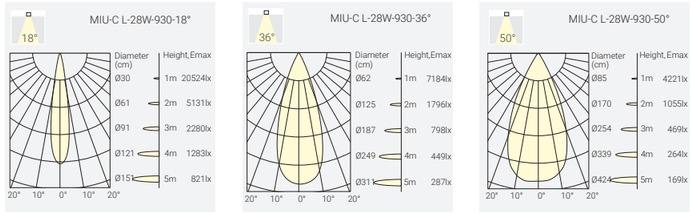

Finish



White Black

Reflector Options



Black White Gold

Optional accessory



Honeycomb

Code for MCL1-9301828F-WB with Honeycomb
MCL1-9301828F-WB-H

Order Info (MIU-C L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3000lm	2850lm	MCL1-9271828F-WB
						36°	3000lm	2850lm	MCL1-9273628F-WB
						50°	3000lm	2850lm	MCL1-9275028F-WB
					3000K	18°	3250lm	3050lm	MCL1-9301828F-WB
						36°	3250lm	3050lm	MCL1-9303628F-WB
						50°	3250lm	3050lm	MCL1-9305028F-WB
					4000K	18°	3450lm	3250lm	MCL1-9401828F-WB
						36°	3450lm	3250lm	MCL1-9403628F-WB
						50°	3450lm	3250lm	MCL1-9405028F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Coding

MCL1	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
MCL1 MIU-C L		927 CRI90/ 2700K	18 18°	28 28W	F On-Off		W White	W White		H Honeycomb
		930 CRI90/ 3000K	36 36°		D DALI Dim		B Black	B Black		
		940 CRI90/ 4000K	50 50°					G Gold		

MIU-P S – Pendant Light




18° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 9W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

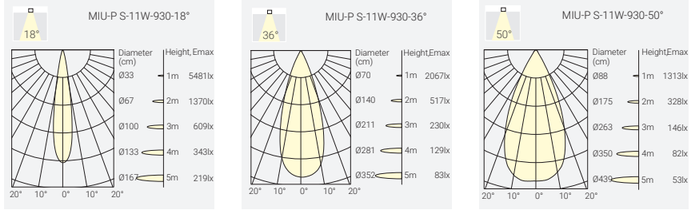

Finish



White Black

Order Info (MIU-P S in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
9W	11W	36V	250mA	90	2700K	18°	1200lm	800lm	MPS1-9271811F-WB
						36°	1200lm	800lm	MPS1-9273611F-WB
						50°	1200lm	800lm	MPS1-9275011F-WB
					3000K	18°	1300lm	850lm	MPS1-9301811F-WB
						36°	1300lm	850lm	MPS1-9303611F-WB
						50°	1300lm	850lm	MPS1-9305011F-WB
					4000K	18°	1400lm	950lm	MPS1-9401811F-WB
						36°	1400lm	950lm	MPS1-9403611F-WB
						50°	1400lm	950lm	MPS1-9405011F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPS1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPS1	927	18	11	F	W	W	H
MIU-P S-11W	CRI90/ 2700K	18°	11W	On-Off	White	White	Honeycomb
	930	36		P	B	B	
	CRI90/ 3000K	36°		Phase Dim	Black	Black	
	940	50		D	G	G	
	CRI90/ 4000K	50°		DALI Dim	Gold	Gold	

Optional accessory



Honeycomb

Code for MPS1-9301811F-WB with Honeycomb
MPS1-9301811F-WB-H

MIU-P M – Pendant Light




15° 36° 50° | 2700K 3000K 4000K | CRI >90 | UGR<19

IP20 | CE | CB | UKCA | bridgelux 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 13W, 18W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 15°, 36°, 50°
- Lumen Output: Up to 2050lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

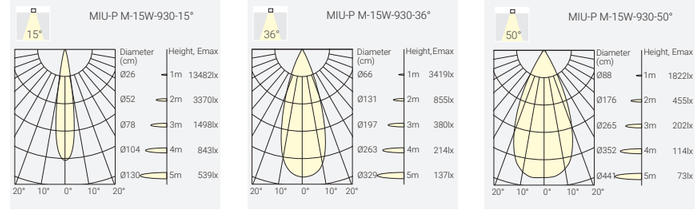

Finish



White Black

Order Info (MIU-P M in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
13W	15W	36V	350mA	90	2700K	15°	1500lm	1250lm	MPM1-9271515F-WB
						36°	1500lm	1300lm	MPM1-9273615F-WB
						50°	1500lm	1250lm	MPM1-9275015F-WB
					3000K	15°	1600lm	1350lm	MPM1-9301515F-WB
						36°	1600lm	1400lm	MPM1-9303615F-WB
						50°	1600lm	1350lm	MPM1-9305015F-WB
					4000K	15°	1700lm	1450lm	MPM1-9401515F-WB
						36°	1700lm	1500lm	MPM1-9403615F-WB
						50°	1700lm	1450lm	MPM1-9405015F-WB
18W	21W	36V	500mA	90	2700K	15°	2100lm	1850lm	MPM2-9271521F-WB
						36°	2100lm	1950lm	MPM2-9273621F-WB
						50°	2100lm	1850lm	MPM2-9275021F-WB
					3000K	15°	2200lm	1950lm	MPM2-9301521F-WB
						36°	2200lm	2050lm	MPM2-9303621F-WB
						50°	2200lm	1950lm	MPM2-9305021F-WB
					4000K	15°	2300lm	2050lm	MPM2-9401521F-WB
						36°	2300lm	2150lm	MPM2-9403621F-WB
						50°	2300lm	2050lm	MPM2-9405021F-WB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Reflector Options



Black White Gold

Optional accessory



Honeycomb

Code for MPM1-9301515F-WB with Honeycomb
MPM1-9301515F-WB-H

Coding


MPM1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPM1	927	15	15	F	W	W	H
MIU-P M-15W	CRI90/ 2700K	15°	15W	On-Off	White	White	Honeycomb
MPM2	930	36	21	P*	B	B	
MIU-P M-21W	CRI90/ 3000K	36°	21W	Phase Dim	Black	Black	
	940	50		D*	G	G	
	CRI90/ 4000K	50°		DALI Dim	Gold	Gold	

* 21W is not available with Phase Dim, DALI Dim

MIU-P L – Pendant Light






Quick Info

- Bridgelux LED: 25W, CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 18°, 36°, 50°
- Lumen Output: Up to 3250lm System Luminous Flux
- IP Class: IP20
- LED Driver: On-Off, DALI Dim

Light Distribution

3000K

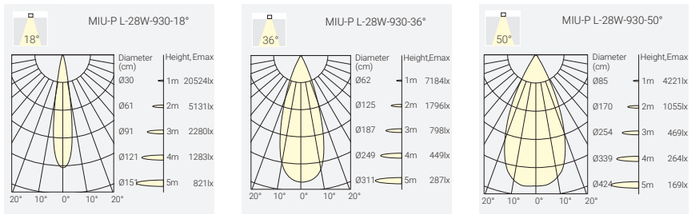

Finish



White Black

Order Info (MIU-P L in White Housing & Black Reflector as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25W	28W	36V	700mA	90	2700K	18°	3000lm	2850lm	MPL1-9271828F-WB
						36°	3000lm	2850lm	MPL1-9273628F-WB
						50°	3000lm	2850lm	MPL1-9275028F-WB
					3000K	18°	3250lm	3050lm	MPL1-9301828F-WB
						36°	3250lm	3050lm	MPL1-9303628F-WB
						50°	3250lm	3050lm	MPL1-9305028F-WB
					4000K	18°	3450lm	3250lm	MPL1-9401828F-WB
						36°	3450lm	3250lm	MPL1-9403628F-WB
						50°	3450lm	3250lm	MPL1-9405028F-WB

Code Remark: F=F(ON-OFF) D=D(DALI Dim)

Reflector Options



Black White Gold

Coding

MPL1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
MPL1 MIU-P L-28W	927 CRI90/ 2700K	18 18°	28 28W	F On-Off	W White	W White	H Honeycomb
	930 CRI90/ 3000K	36 36°		D DALI Dim	B Black	B Black	
	940 CRI90/ 4000K	50 50°				G Gold	

Optional accessory



Code for MPL1-9301828F-WB with Honeycomb MPL1-9301828F-WB-H

Honeycomb

Project: Hotel Agua Del Desierto, Calama, Chile

MIU ART

Convex lens optics, UGR<19
Compact & minimalist design
Ceiling light in four compact sizes
Phase Dim & DALI versions available
Premium finishes for refined interiors



MIU ART-S – Ceiling Mounted Light



36° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | LUMENS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMENS LED: AC COB, 3W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 240lm System Luminous Flux
- IP Class: IP20
- Dimming: 220-240VAC Direct Input, Phase Dim



Light Distribution

3000K



Standard Finish



White Black

Order Info (MIU ART-S in Black Housing as an Example)

LED Power	System Power	Input Voltage	CRI	CCT	Beam	LED Output	System Output	Code
3W	4W	220-240VAC	90	2700K	36°	300lm	210lm	MIAS-9273604P-BB
				3000K	36°	320lm	220lm	MIAS-9303604P-BB
				4000K	36°	350lm	240lm	MIAS-9403604P-BB

Code Remark: P=P(Phase Dim)

Optional Finish



Gold Chrome

*Customized Colors Optional

Coding

MIAS – *** ** ** * – ** –

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAS MIU ART-S-4W	927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	36 36°	04 4W	P Phase Dim	WW White BB Black GG Gold CR Chrome	

MIU ART-M – Ceiling Mounted Light



48° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | LUMENS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMENS LED: AC COB, 7W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 48°
- Lumen Output: Up to 600lm System Luminous Flux
- IP Class: IP20
- Dimming: 220-240VAC Direct Input, Phase Dim



Light Distribution

3000K



Standard Finish



White Black

Order Info (MIU ART-M in Black Housing as an Example)

LED Power	System Power	Input Voltage	CRI	CCT	Beam	LED Output	System Output	Code
7W	8W	220-240VAC	90	2700K	48°	670lm	520lm	MIAM-9274808P-BB
				3000K	48°	700lm	550lm	MIAM-9304808P-BB
				4000K	48°	750lm	600lm	MIAM-9404808P-BB

Code Remark: P=P(Phase Dim)

Optional Finish



Gold Chrome

*Customized Colors Optional

Coding

MIAM – *** ** ** * – ** –

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
MIAM MIU ART-M-8W	927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	48 48°	08 8W	P Phase Dim	WW White BB Black GG Gold CR Chrome	

MIU ART-S DALI – Ceiling Mounted Light

New



30° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 30°
- Lumen Output: Up to 470lm System Luminous Flux
- IP Class: IP20
- Dimming: DALI Dim



Light Distribution

3000K



Standard Finish



White Black

Order Info (MIU ART-S DALI in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
5W	6W	34V	150mA	90	2700K	30°	780lm	430lm	MIAS-9273006D-BB
					3000K	30°	810lm	450lm	MIAS-9303006D-BB
					4000K	30°	850lm	470lm	MIAS-9403006D-BB

Code Remark: D=D(DALI Dim)

Optional Finish



Gold Chrome

*Customized Colors Optional

Coding

MIAS	–	***	**	**	*	–	**	–	
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
MIAS MIU ART-S DALI		927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	30 30°	06 6W	D DALI Dim		WW White BB Black GG Gold CR Chrome		

MIU ART-M DALI – Ceiling Mounted Light


New



50° | 2700K 3000K 4000K | CRI >90 | UGR<19 | IP20 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 8.5W, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 50°
- Lumen Output: Up to 840lm System Luminous Flux
- IP Class: IP20
- Dimming: DALI Dim



Light Distribution

3000K



Standard Finish



White Black

Order Info (MIU ART-M DALI in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8.5W	10W	34V	250mA	90	2700K	50°	1400lm	770lm	MIAM-9275010D-BB
					3000K	50°	1440lm	800lm	MIAM-9305010D-BB
					4000K	50°	1500lm	840lm	MIAM-9405010D-BB

Code Remark: D=D(DALI Dim)

Optional Finish



Gold Chrome

*Customized Colors Optional

Coding

MIAM	–	***	**	**	*	–	**	–	
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
MIAM MIU ART-M DALI		927 CRI90/ 2700K 930 CRI90/ 3000K 940 CRI90/ 4000K	50 50°	10 10W	D DALI Dim		WW White BB Black GG Gold CR Chrome		

VIBES

360° rotation and 90° tilt for flexible aiming
Single or double spot, round or square base
Phase Dim driver integrated in mounting base
Recessed or surface-mounted spotlight system









Different Mounting Bases (White/ Black)

Surface Mounted


1RC Base


1SC Base


2RC Base


2SC Base

Recessed Mounted


1RR Base


1SR Base


2RR Base


2SR Base

Accessory


Honeycomb

Module Color


Black


Brushed Gold


Chrome


White


VIBES V1RC – Single-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V1RC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1RC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RC-9303614P-WW

Code Remark: P=P(Phase Dim)

Coding

V1RC	–	***	**	**	*	–	**	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish		Accessory
V1RC		927 CRI90/ 2700K 930 CRI90/ 3000K	36 36°	14 14W	P Phase Dim		WW White-White (WW) BB Black-Black (BB) BC Black-Chrome (BC) BG Black-Gold (BG)		H Honeycomb

Optional accessory



Code for V1RC-9273614P-WW with Honeycomb
V1RC-9273614P-WW-H

Honeycomb


VIBES V2RC – Double-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V2RC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2RC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RC-9303628P-WW

Code Remark: P=P(Phase Dim)

Coding

V2RC	–	***	**	**	*	–	**	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish		Accessory
V2RC		927 CRI90/ 2700K 930 CRI90/ 3000K	36 36°	28 28W	P Phase Dim		WW White-White (WW) BB Black-Black (BB) BC Black-Chrome (BC) BG Black-Gold (BG)		H Honeycomb

Optional accessory



Code for V2RC-9273628P-WW with Honeycomb
V2RC-9273628P-WW-H

Honeycomb


VIBES V1SC – Single-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Base Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V1SC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1SC-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SC-9303614P-WW

Code Remark: P=P(Phase Dim)

Coding

V1SC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1SC	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW White-White (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessory



Code for V1SC-9273614P-WW with Honeycomb
V1SC-9273614P-WW-H

Honeycomb


VIBES V2SC – Double-Head Ceiling Mounted Spotlight



36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim




Light Distribution

2700K



3000K



Base Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V2SC in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2SC-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SC-9303628P-WW

Code Remark: P=P(Phase Dim)

Coding

V2SC – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2SC	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW White-White (WW)	H Honeycomb
	930 CRI90/ 3000K				BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessory



Code for V2SC-9273628P-WW with Honeycomb
V2SC-9273628P-WW-H

Honeycomb


VIBES V1RR – Single-Head Ceiling Mounted Spotlight




36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V1RR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1RR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1RR-9303614P-WW

Code Remark: P=P(Phase Dim)

Coding

V1RR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V1RR	927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim	WW White-White (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessory



Code for V1RR-9273614P-WW with Honeycomb
V1RR-9273614P-WW-H

Honeycomb


VIBES V2RR – Double-Head Ceiling Mounted Spotlight




36° | 2700K 3000K | CRI >90 | IP20 | CE | CITIZEN 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V2RR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2RR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2RR-9303628P-WW

Code Remark: P=P(Phase Dim)

Coding

V2RR – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
V2RR	927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim	WW White-White (WW)	H Honeycomb
	930 CRI90/ 3000K			D DALI Dim	BB Black-Black (BB)	
					BC Black-Chrome (BC)	
					BG Black-Gold (BG)	

Optional accessory



Code for V2RR-9273628P-WW with Honeycomb
V2RR-9273628P-WW-H

Honeycomb


VIBES V1SR – Single-Head Recessed Spotlight






Quick Info


- CITIZEN LED: 14W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 1200lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V1SR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12.5W	14W	36V	350mA	90	2700K	36°	1400lm	1100lm	V1SR-9273614P-WW
					3000K	36°	1500lm	1200lm	V1SR-9303614P-WW

Code Remark: P=P(Phase Dim)

Coding

V1SR	–	***	**	**	*	–	**	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
V1SR		927 CRI90/ 2700K	36 36°	14 14W	P Phase Dim		WW White-White (WW)		H Honeycomb
		930 CRI90/ 3000K			D DALI Dim		BB Black-Black (BB)		
							BC Black-Chrome (BC)		
							BG Black-Gold (BG)		

Optional accessory



Code for V1SR-9273614P-WW with Honeycomb
V1SR-9273614P-WW-H

Honeycomb


VIBES V2SR – Double-Head Recessed Spotlight






Quick Info


- CITIZEN LED: 28W, CRI>90
- CCT: 2700K, 3000K Available as Standard
- Beam Angle: 36°
- Lumen Output: Up to 2400lm System Luminous Flux
- IP Class: IP20
- LED Driver: Phase Dim, DALI Dim, Casambi Wireless Dim






Light Distribution

2700K



3000K



Finish



White-White (WW)



Black-Black (BB)



Black-Chrome (BC)



Black-Gold (BG)

Order Info (VIBES V2SR in White-White Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
2x12.5W	2x14W	36V	2x350mA	90	2700K	36°	2900lm	2300lm	V2SR-9273628P-WW
					3000K	36°	3000lm	2400lm	V2SR-9303628P-WW

Code Remark: P=P(Phase Dim)

Coding

V2SR	–	***	**	**	*	–	**	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
V2SR		927 CRI90/ 2700K	36 36°	28 28W	P Phase Dim		WW White-White (WW)		H Honeycomb
		930 CRI90/ 3000K			D DALI Dim		BB Black-Black (BB)		
							BC Black-Chrome (BC)		
							BG Black-Gold (BG)		

Optional accessory



Code for V2SR-9273628P-WW with Honeycomb
V2SR-9273628P-WW-H

Honeycomb

PEARL

Accent and ambient lighting in one
CCT options: 2700K, 3000K, 4000K
36° beam angle available for focused lighting
Multiple installation options for design flexibility
IP54 rated – best for semi-outdoor or damp spaces
Choice of reflector colors for enhanced visual comfort



PEARL – Product Overview

New




Ambient light

Circular ambient light surface


Dual Lighting

Accent light

2700K / 3000K / 4000K
36°

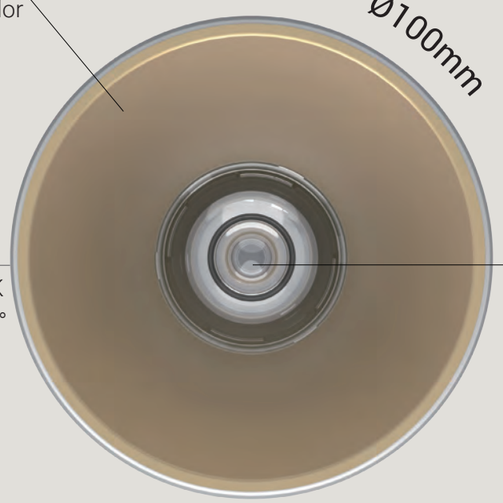

Reflector color

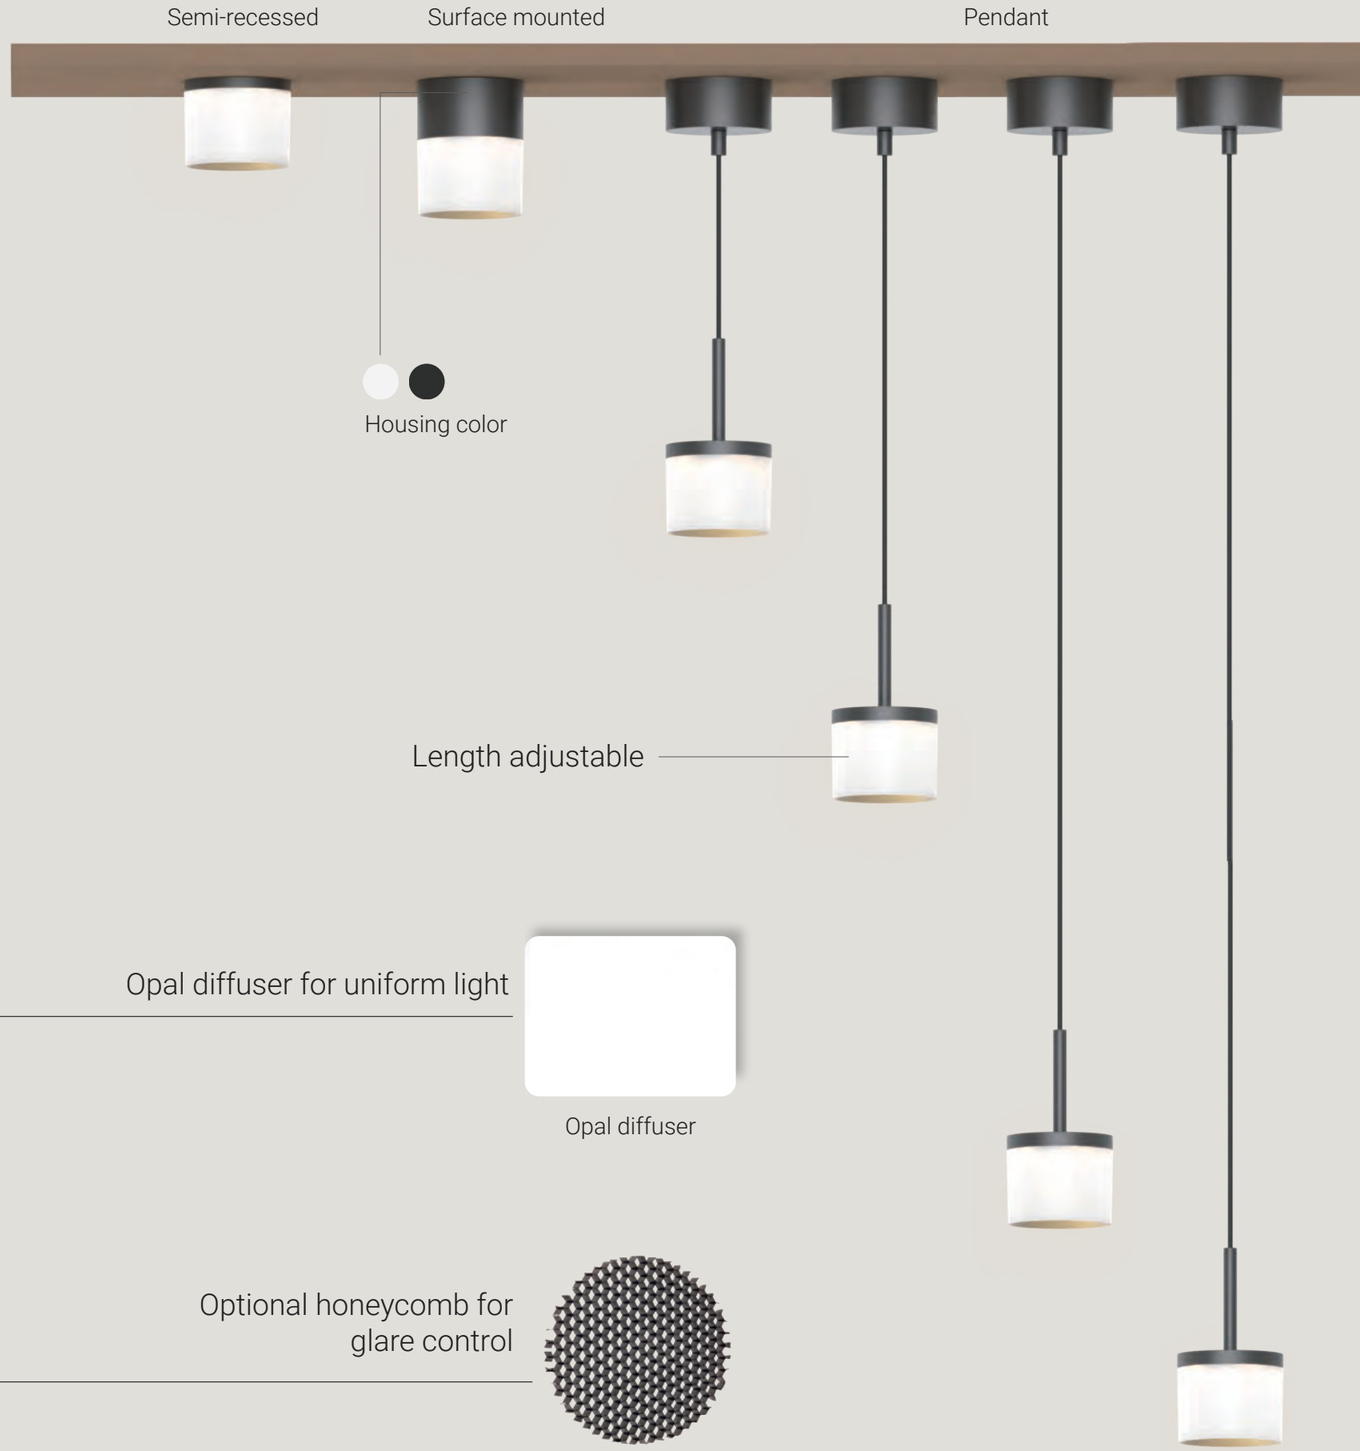

Opal diffuser for uniform light

Opal diffuser


Optional honeycomb for glare control

Honeycomb

PEARL – Decorative Semi-recessed Downlight

New






36°
2700K
3000K
4000K
CRI >90
CE
UK CA
bridgelux
50,000h@L90B10
5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø75mm for semi-recessed version
- Bridgelux: 8W,CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 36°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off, Phase Dim, DALI Dim

Light Distribution

3000K

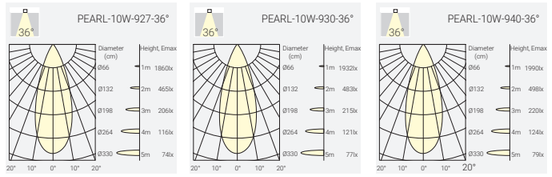

Base Finish



White Black

Order Info (PEARL Semi-recessed Downlight)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	90	2700K	36°	1130lm	850lm	PAR1-9273610F-WW
					3000K	36°	1160lm	870lm	PAR1-9303610F-WW
					4000K	36°	1200lm	900lm	PAR1-9403610F-WW
				90	2700K	36°	1130lm	850lm	PAR1-9273610F-WG
					3000K	36°	1160lm	870lm	PAR1-9303610F-WG
					4000K	36°	1200lm	900lm	PAR1-9403610F-WG
				90	2700K	36°	1130lm	850lm	PAR1-9273610F-BB
					3000K	36°	1160lm	870lm	PAR1-9303610F-BB
					4000K	36°	1200lm	900lm	PAR1-9403610F-BB
				90	2700K	36°	1130lm	850lm	PAR1-9273610F-BG
					3000K	36°	1160lm	870lm	PAR1-9303610F-BG
					4000K	36°	1200lm	900lm	PAR1-9403610F-BG

Code Remark: F= F(ON-OFF) P= P(Phase Dim) D= D(DALI Dim)

Reflector Options



White Black Gold

Coding

PAR1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	System	Control	Finish	Reflector Color	Accessory
PAR1	927	36°	10W	F	W	W	
PEARL Semi-recessed-10W	CRI90/ 2700K	36°	10W	On-Off	White	White	
	930			P	B	B	
	CRI90/ 3000K			Phase Dim	Black	Black	
	940			D		G	
	CRI90/ 4000K			DALI Dim		Gold	



PEARL – Decorative Ceiling Light


New



36° | 2700K 3000K 4000K | CRI >90 | CE | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Ceiling Light
- Bridgelux: 8W,CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 36°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

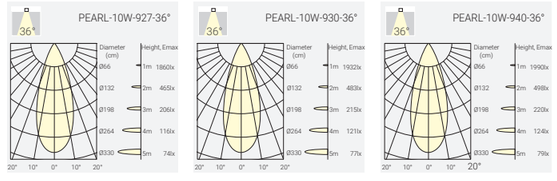

Base Finish



White Black

Order Info (PEARL Ceiling Light)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	90	2700K	36°	1130lm	850lm	PAC1-9273610F-WW
					3000K	36°	1160lm	870lm	PAC1-9303610F-WW
					4000K	36°	1200lm	900lm	PAC1-9403610F-WW
				90	2700K	36°	1130lm	850lm	PAC1-9273610F-WG
					3000K	36°	1160lm	870lm	PAC1-9303610F-WG
					4000K	36°	1200lm	900lm	PAC1-9403610F-WG
				90	2700K	36°	1130lm	850lm	PAC1-9273610F-BB
					3000K	36°	1160lm	870lm	PAC1-9303610F-BB
					4000K	36°	1200lm	900lm	PAC1-9403610F-BB
				90	2700K	36°	1130lm	850lm	PAC1-9273610F-BG
					3000K	36°	1160lm	870lm	PAC1-9303610F-BG
					4000K	36°	1200lm	900lm	PAC1-9403610F-BG

Code Remark: F= F(ON-OFF) P= P(Phase Dim) D= D(DALI Dim)

Reflector Options



White Black Gold

Coding

PAC1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	System	Control	Finish	Reflector Color	Accessory
PAC1 PEARL Ceiling-10W	927 CRI90/ 2700K	36° 36°	10W 10W	F On-Off	W White	W White	
	930 CRI90/ 3000K			P Phase Dim	B Black	B Black	
	940 CRI90/ 4000K			D DALI Dim		G Gold	

PEARL – Decorative Pendant Light


New



36° | 2700K 3000K 4000K | CRI >90 | CE | UKCA | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Pendant Wire Light
- Bridgelux: 8W,CRI>90
- CCT: 2700K, 3000K, 4000K
- Beam Angle: 36°
- Lumen Output: Up to 900lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K

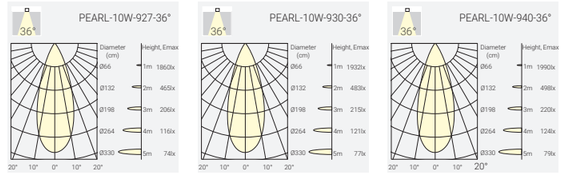

Base Finish



White Black

Order Info (PEARL Pendant Light)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	90	2700K	36°	1130lm	850lm	PAW1-9273610F-WW
					3000K	36°	1160lm	870lm	PAW1-9303610F-WW
					4000K	36°	1200lm	900lm	PAW1-9403610F-WW
				90	2700K	36°	1130lm	850lm	PAW1-9273610F-WG
					3000K	36°	1160lm	870lm	PAW1-9303610F-WG
					4000K	36°	1200lm	900lm	PAW1-9403610F-WG
				90	2700K	36°	1130lm	850lm	PAW1-9273610F-BB
					3000K	36°	1160lm	870lm	PAW1-9303610F-BB
					4000K	36°	1200lm	900lm	PAW1-9403610F-BB
				90	2700K	36°	1130lm	850lm	PAW1-9273610F-BG
					3000K	36°	1160lm	870lm	PAW1-9303610F-BG
					4000K	36°	1200lm	900lm	PAW1-9403610F-BG

Code Remark: F= F(ON-OFF) P= P(Phase Dim) D= D(DALI Dim)

Reflector Options



White Black Gold

Coding

PAW1 – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	System	Control	Finish	Reflector Color	Accessory
PAW1 PEARL Pendant -10W	927 CRI90/ 2700K	36° 36°	10W 10W	F On-Off	W White	W White	
	930 CRI90/ 3000K			P Phase Dim	B Black	B Black	
	940 CRI90/ 4000K			D DALI Dim		G Gold	


MOVE

Chrome Black with Champagne Gold Accents
Stepless Pendant Height Adjustment from 0-1700mm



MOVE – Pendant Light

New

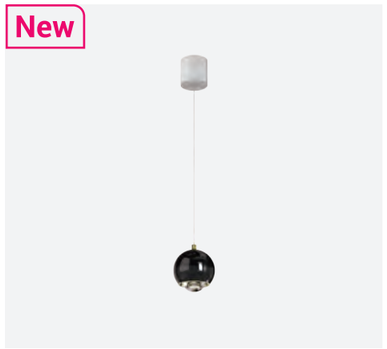




90° | 3000K | CRI >90 | IP20 | CE | LUMINUS 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- General Lighting, Pendant Direct
- LUMINUS LED: 5W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 480lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim

Light Distribution

3000K



Finish



Chrome
Black(CB)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
5W	6W	36V	150mA	90	3000K	90°	480lm	MOVE-9309006F-CB MOVE-9309006P-CB MOVE-9309006D-CB

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

MOVE	–	***	**	**	*	–	**	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish		Accessory
MOVE MOVE		930 CRI90/ 3000K	90 90°	06 6W	F On-Off P Phase Dim D DALI Dim		CB Chrome Black		



Project: Application reference

SPACE 07

Upward and Downward Illumination
80° Diffused Beam for Direct Lighting
7mm Ultra-Slim Light-Emitting Surface
Electroplated Finish in Sleek Metal Tones
Decorative Design Meets Functional Efficiency
Stepless Pendant Height Adjustment from 0-1700mm



SPACE 07 – Decorative Pendant Linear Light


New



110° / 80° | 3000K | CRI >90 | IP20 | CE | SMD 2835 | E27 Bright 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- SMD 2835 LED: 38W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 80° ↓ , 110° ↑
- Lumen Output: Up to 2450lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K



Finish



Brushed Bronze(BR)



Brushed Nickel(BN)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
38W	40W	36V	1050mA	90	3000K	80° ↓ 110° ↑	2450lm	S07A-9308040F-BR-U S07A-9308040F-BN-U S07A-9308040P-BR-U S07A-9308040P-BN-U S07A-9308040D-BR-U S07A-9308040D-BN-U

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

S07A	–	***	**	**	*	–	**	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish		Accessory
S07A SPACE 07		930 CRI90/ 3000K	80 80° ↓ 80 80° ↓ 110° ↑	40 40W	F On-Off P Phase Dim D DALI Dim		BR Brushed Bronze BN Brushed Nickel		U Uplight



Project: Application reference

SPACE 16 RING

Refined electroplated metallic finish options
Elegant ring luminaire for architectural spaces
Stepless suspension adjustment up to 1700 mm
Direct and indirect lighting in one seamless design
Glare-free illumination with UGR<19 visual comfort



SPACE 16 RING – Upward and Downward in One Elegant Form

New

Stepless Pendant Height Adjustment
from 0-1700mm




Uplight - Soft Ambient Glow
Beam Angle: 110°






Downlight - Precision Accent Lighting
Beam Angle: 36°

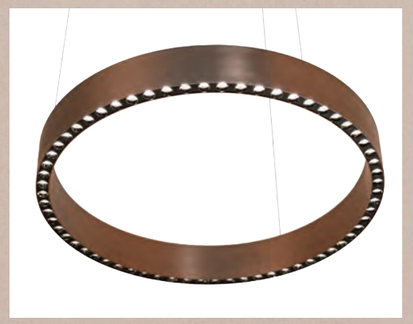



SPACE 16 RING – Decorative Pendant Light


New



110° □ 36° | 3000K | CRI >90 | IP20 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 28W, 43W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 36° ↓, 110° ↑
- Lumen Output: Up to 2700lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K



Finish



Brushed Bronze(BR) | Brushed Nickel(BN) | Chrome Black(CB)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
28W	30W	36V	800mA	90	3000K	36°↓110°↑	1900lm	S16A-9303630F-BR-U S16A-9303630F-BN-U S16A-9303630F-CB-U S16A-9303630P-BR-U S16A-9303630P-BN-U S16A-9303630P-CB-U S16A-9303630D-BR-U S16A-9303630D-BN-U S16A-9303630D-CB-U
43W	46W	36V	1200mA	90	3000K	36°↓110°↑	2700lm	S16C-9303646F-BR-U S16C-9303646F-BN-U S16C-9303646F-CB-U S16C-9303646P-BR-U S16C-9303646P-BN-U S16C-9303646P-CB-U S16C-9303646D-BR-U S16C-9303646D-BN-U S16C-9303646D-CB-U

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)


Coding


S16A – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
S16A SPACE 16 RING-400-30W	**930** CRI90/ 3000K	**36** 36° ↓	**30** 30W	**F** On-Off	**BR** Brushed Bronze	**U** Uplight
S16C SPACE 16 RING-600-46W		**36** 36° ↓ 110° ↑	**46** 46W	**P** Phase Dim	**BN** Brushed Nickel	
				D DALI Dim	**CB** Chrome Black	



Simply Lift or Pull Down the Luminaire to Achieve Your Desired Height

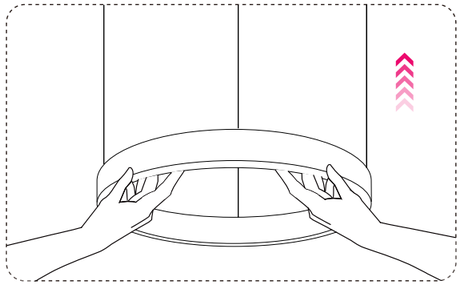

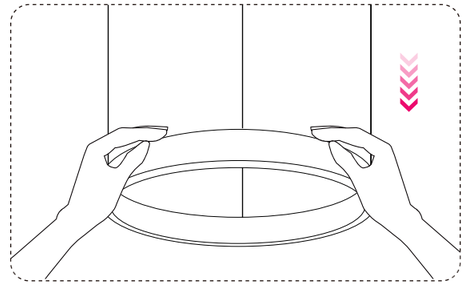

SPACE 16 RING Semi-recessed – Decorative Pendant Light


New



110° □ 36° | 3000K | CRI >90 | IP20 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting, Pendant Direct & Indirect
- Lumileds LED: 28W, 43W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 36° ↓, 110° ↑
- Lumen Output: Up to 2700lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K



Finish



Brushed Bronze(BR) | Brushed Nickel(BN) | Chrome Black(CB)

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
28W	30W	36V	800mA	90	3000K	36° ↓ 110° ↑	1900lm	S16E-9303630F-BR-U S16E-9303630F-BN-U S16E-9303630F-CB-U S16E-9303630P-BR-U S16E-9303630P-BN-U S16E-9303630P-CB-U S16E-9303630D-BR-U S16E-9303630D-BN-U S16E-9303630D-CB-U
43W	46W	36V	1200mA	90	3000K	36° ↓ 110° ↑	2700lm	S16G-9303646F-BR-U S16G-9303646F-BN-U S16G-9303646F-CB-U S16G-9303646P-BR-U S16G-9303646P-BN-U S16G-9303646P-CB-U S16G-9303646D-BR-U S16G-9303646D-BN-U S16G-9303646D-CB-U

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

S16E – *** ** ** * – ** – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Accessory
S16E SPACE 16 RING-400-Semi-recessed-30W	**930** CRI90/ 3000K	**36** 36° ↓	**30** 30W	**F** On-Off	**BR** Brushed Bronze	**U** Uplight
S16G SPACE 16 RING-600-Semi-recessed-46W		**36** 36° ↓ 110° ↑	**46** 46W	**P** Phase Dim	**BN** Brushed Nickel	
				D DALI Dim	**CB** Chrome Black	



GAME & SUGAR

Microprismatic optics with UGR<19
Single CCT or Tunable White options
Four diameters from Ø350 to Ø900 mm
Surface-mounted or suspended versions
Optional indirect magnetic lighting module
High-efficiency ceiling light family, up to 140 lm/W



Project: Aurum University, Turku, Finland

GAME


SUGAR

Microprismatic Cover
UGR<19
Up to 140lm/W




GAME & SUGAR – Ceiling Light



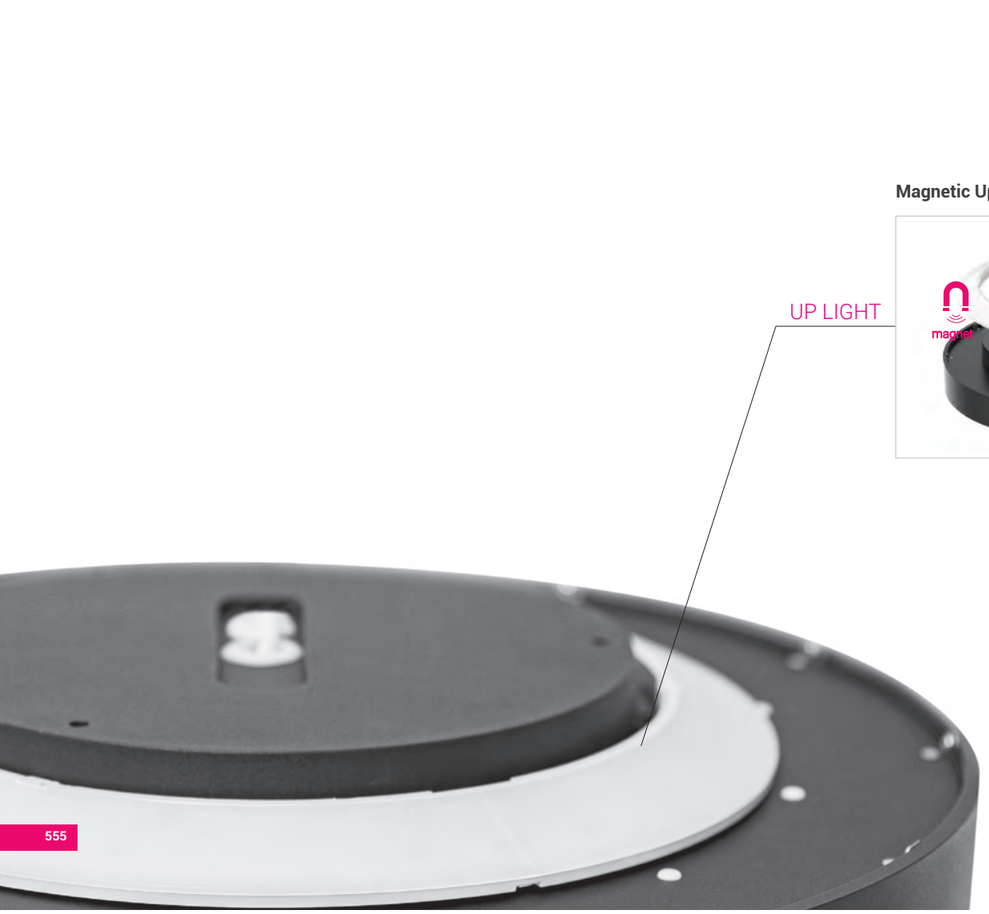



8W Up Light(250mA) 950lm
12W Down Light(350mA) 1800lm
16W Down Light(500mA) 2350lm
ON-OFF/Phase Dim/0-10V/DALI Dim







11W Up Light(350mA) 1200lm
16W Down Light(500mA) 2500lm
24W Down Light(700mA) 3400lm
ON-OFF/Phase Dim/0-10V/DALI Dim







18W Up Light(500mA) 1800lm
24W Down Light(700mA) 3300lm
36W Down Light(1050mA) 5300lm
46W Down Light(1400mA) 6700lm
ON-OFF/Phase Dim/0-10V/DALI Dim





25W Up Light(700mA) 2700lm
65W Down Light(1400mA) 8700lm
ON-OFF/0-10V/DALI Dim






GAME

D1: GAME 350: D1=Ø350mm
GAME 450: D1=Ø450mm
GAME 600: D1=Ø600mm
GAME 900: D1=Ø900mm

D2: GAME 350/ 450: D2=Ø235mm
GAME 600/ 900: D2=Ø350mm

D3: Ø136mm

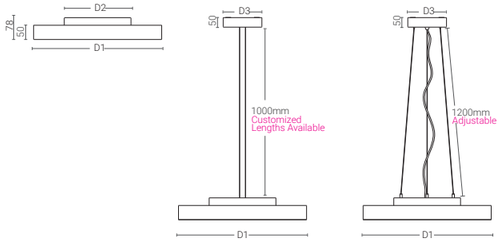


SUGAR

D1: SUGAR 350: D1=Ø350mm
SUGAR 450: D1=Ø450mm
SUGAR 600: D1=Ø600mm
SUGAR 900: D1=Ø900mm

D2: SUGAR 350/ 450: D2=Ø235mm
SUGAR 600/ 900: D2=Ø350mm

D3: Ø136mm

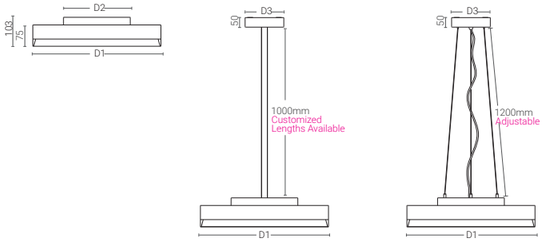

Project: Deribit Corporate Office, Panama City, Panama






GAME 350 – Ceiling Light






Quick Info


- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Standard pendant rod length: 1000mm
* Field cuttable pendant rod solution optional



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Order Info (Surface/ Wall Mounted GAME 350 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	G3SM-8279012N-BN
					3000K	90°	2100lm	1700lm	G3SM-8309012N-BN
					4000K	90°	2300lm	1800lm	G3SM-8409012N-BN
					2700K-6500K	90°	Max.2100lm	Max.1750lm	G3SM-8T29012N-BN
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	G3SM-8279016N-BN
					3000K	90°	2700lm	2150lm	G3SM-8309016N-BN
					4000K	90°	2900lm	2350lm	G3SM-8409016N-BN
Uplight Module					2700K-6500K	90°	Max.2900lm	Max.2500lm	G3SM-8T29012N-BN
8W	10W	33V	250mA	80	2700K	110°	1300lm	1150lm	UM35-827A108N-NN
					3000K	110°	1400lm	1200lm	UM35-830A108N-NN
					4000K	110°	1500lm	1250lm	UM35-840A108N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

G3SM – * ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G3SM GAME 350 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**12** 12W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G3PW GAME 350 Pendant Wires	**830** CRI80/ 3000K		**16** 16W	**F** On-Off	**B** Black		
G3PR GAME 350 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim			
	8T2 CRI80 2700K-6500K Tunable White			**A** 0-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K-6500K Tunable White						

Optional Uplight Module



Code for G3SM-8309012N-WN with Uplight Module
G3SM-8309012N-WN-U

Magnetic Uplight Module 350


GAME 450 – Ceiling Light






Quick Info


- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Order Info (Surface/ Wall Mounted GAME 450 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2400lm	2150lm	G4SM-8279016N-BN
					3000K	90°	2600lm	2300lm	G4SM-8309016N-BN
					4000K	90°	2800lm	2500lm	G4SM-8409016N-BN
					2700K-6500K	90°	Max.2900lm	Max.2300lm	G4SM-8T09016N-BN
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	G4SM-8279024N-BN
					3000K	90°	3700lm	3150lm	G4SM-8309024N-BN
					4000K	90°	4000lm	3400lm	G4SM-8409024N-BN
Uplight Module					2700K-6500K	90°	Max.4100lm	Max.3200lm	G4SM-8T29024N-BN
11W	13W	33V	350mA	80	2700K	110°	1700lm	1500lm	UM45-827A111N-NN
					3000K	110°	1850lm	1600lm	UM45-830A111N-NN
					4000K	110°	2000lm	1800lm	UM45-840A111N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

G4SM – * ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Reflector Color	Accessory
G4SM GAME 450 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**16** 16W	**N** No Driver	**W** White	**N** None	**U** Uplight Module
G4PW GAME 450 Pendant Wires	**830** CRI80/ 3000K		**24** 24W	**F** On-Off	**B** Black		
G4PR GAME 450 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim			
	8T2 CRI80 2700K-6500K Tunable White			**A** 0-10V Dim			
	927 CRI90/ 2700K			**D** DALI Dim			
	930 CRI90/ 3000K						
	940 CRI90/ 4000K						
	9T2 CRI90 2700K-6500K Tunable White						

Optional Uplight Module



Code for G4SM-8309016N-WN with Uplight Module
G4SM-8309016N-WN-U

Magnetic Uplight Module 450


GAME 600 – Ceiling Light






Quick Info


- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Optional Uplight Module



Code for G6SM-8309036N-WN with Uplight Module
G6SM-8309036N-WN-U

Magnetic Uplight Module 600

Order Info (Surface/ Wall Mounted GAME 600 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	G6SM-8279024N-BN
					3000K	90°	3700lm	3000lm	G6SM-8309024N-BN
					4000K	90°	4000lm	3300lm	G6SM-8409024N-BN
					2700K-6500K	90°	Max.4100lm	Max.3400lm	G6SM-8T29024N-BN
36W	38W	34V	1050mA	80	2700K	90°	5800lm	4750lm	G6SM-8279036N-BN
					3000K	90°	6200lm	5000lm	G6SM-8309036N-BN
					4000K	90°	6600lm	5300lm	G6SM-8409036N-BN
					2700K-6500K	90°	Max.6600lm	Max.5700lm	G6SM-8T29036N-BN
46W	48W	34V	1400mA	80	2700K	90°	7200lm	5850lm	G6SM-8279046N-NN
					3000K	90°	8100lm	6150lm	G6SM-8309046N-NN
					4000K	90°	8600lm	6700lm	G6SM-8409046N-NN
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	2700lm	2200lm	UM60-827A118N-NN
					3000K	110°	2850lm	2400lm	UM60-830A118N-NN
					4000K	110°	3000lm	2600lm	UM60-840A118N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

G6SM	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
G6SM GAME 600 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**24** 24W		**N** No Driver		**W** White		**N** None		**U** Uplight Module
G6PW GAME 600 Pendant Wires		**830** CRI80/ 3000K				**36** 36W		**F** On-Off		**B** Black				
G6PR GAME 600 Pendant Rod		**840** CRI80/ 4000K				**46** 46W *		**P** Phase Dim						
		8T2 CRI80 2700K-6500K Tunable White						**A** 0-10V Dim						
		927 CRI90/ 2700K						**D** DALI Dim						
		930 CRI90/ 3000K												
		940 CRI90/ 4000K												
		9T2 CRI90 2700K-6500K Tunable White												

* LED 46W is not available with Tunable White


GAME 900 – Ceiling Light






Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish

Surface/ Wall Mounted



White Black

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



White Black

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



White Black

Optional Uplight Module



Code for G9SM-8309060N-WN with Uplight Module
G9SM-8309060N-WN-U

Magnetic Uplight Module 900

Order Info (Surface/ Wall Mounted GAME 900 in Black Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	90°	9900lm	7500lm	G9SM-8279060N-BN
					3000K	90°	10500lm	7900lm	G9SM-8309060N-BN
					4000K	90°	11000lm	8700lm	G9SM-8409060N-BN
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	4200lm	3200lm	UM90-827A128N-NN
					3000K	110°	4500lm	3400lm	UM90-830A128N-NN
					4000K	110°	4800lm	3600lm	UM90-840A128N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

G9SM	–	***		**		**		*	–	*		*	–	*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Reflector Color**		**Accessory**
G9SM GAME 900 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**60** 60W		**N** No Driver		**W** White		**N** None		**U** Uplight Module
G9PW GAME 900 Pendant Wires		**830** CRI80/ 3000K						**F** On-Off		**B** Black				
G9PR GAME 900 Pendant Rod		**840** CRI80/ 4000K						**A** 0-10V Dim						
		927 CRI90/ 2700K						**D** DALI Dim						
		930 CRI90/ 3000K												
		940 CRI90/ 4000K												

Project: Aurum University, Turku, Finland




SUGAR 350 – Ceiling Light






Quick Info


- LED: 12W, 16W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 350 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	14W	34V	350mA	80	2700K	90°	2000lm	1600lm	S3SM-8279012N-BG
					3000K	90°	2100lm	1700lm	S3SM-8309012N-BG
					4000K	90°	2300lm	1800lm	S3SM-8409012N-BG
					2700K-6500K	90°	Max.2100lm	Max.1750lm	S3SM-8T29012N-BG
16W	18W	34V	500mA	80	2700K	90°	2500lm	2000lm	S3SM-8279016N-BG
					3000K	90°	2700lm	2150lm	S3SM-8309016N-BG
					4000K	90°	2900lm	2350lm	S3SM-8409016N-BG
Uplight Module					2700K-6500K	90°	Max.2900lm	Max.2500lm	S3SM-8T29016N-BG
8W	10W	33V	250mA	80	2700K	110°	1300lm	1150lm	UM35-827A108N-NN
					3000K	110°	1400lm	1200lm	UM35-830A108N-NN
					4000K	110°	1500lm	1250lm	UM35-840A108N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

S3SM – * ** ** * – ** ***

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S3SM SUGAR 350 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**12** 12W	**N** No Driver	**WW** White-White	**U** Uplight Module
S3PW SUGAR 350 Pendant Wires	**830** CRI80/ 3000K		**16** 16W	**F** On-Off	**BB** Black-Black	
S3PR SUGAR 350 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim	**BG** Black-Gold	
	8T2 CRI80 2700K-6500K Tunable White			**A** 0-10V Dim	**WG** White-Gold (Optional)	
	927 CRI90/ 2700K			**D** DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K-6500K Tunable White					

Optional Uplight Module



Code for S3SM-8309012N-BG with Uplight Module S3SM-8309012N-BG-U

Magnetic Uplight Module 350


SUGAR 450 – Ceiling Light






Quick Info


- LED: 16W, 24W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 3400lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 450 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	34V	500mA	80	2700K	90°	2400lm	2150lm	S4SM-8279016N-BG
					3000K	90°	2600lm	2300lm	S4SM-8309016N-BG
					4000K	90°	2800lm	2500lm	S4SM-8409016N-BG
					2700K-6500K	90°	Max.2900lm	Max.2300lm	S4SM-8T29016N-BG
24W	26W	34V	700mA	80	2700K	90°	3500lm	3000lm	S4SM-8279024N-BG
					3000K	90°	3700lm	3150lm	S4SM-8309024N-BG
					4000K	90°	4000lm	3400lm	S4SM-8409024N-BG
Uplight Module					2700K-6500K	90°	Max.4100lm	Max.3200lm	S4SM-8T29024N-BG
11W	13W	33V	350mA	80	2700K	110°	1700lm	1500lm	UM45-827A111N-NN
					3000K	110°	1850lm	1600lm	UM45-830A111N-NN
					4000K	110°	2000lm	1800lm	UM45-840A111N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

S4SM – * ** ** * – ** ***

Model	CRI/ CCT	Beam Angle	LED Power	Control	Finish	Accessory
S4SM SUGAR 450 Surface/ Wall Mounted	**827** CRI80/ 2700K	**90** 90°	**16** 16W	**N** No Driver	**WW** White-White	**U** Uplight Module
S4PW SUGAR 450 Pendant Wires	**830** CRI80/ 3000K		**24** 24W	**F** On-Off	**BB** Black-Black	
S4PR SUGAR 450 Pendant Rod	**840** CRI80/ 4000K			**P** Phase Dim	**BG** Black-Gold	
	8T2 CRI80 2700K-6500K Tunable White			**A** 0-10V Dim	**WG** White-Gold (Optional)	
	927 CRI90/ 2700K			**D** DALI Dim		
	930 CRI90/ 3000K					
	940 CRI90/ 4000K					
	9T2 CRI90 2700K-6500K Tunable White					

Optional Uplight Module



Code for S4SM-8309016N-WN with Uplight Module S4SM-8309016N-WN-U

Magnetic Uplight Module 450


SUGAR 600 – Ceiling Light






Quick Info


- LED: 24W, 36W, 46W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard, Tunable White Available
- Beam Angle: 90°
- Lumen Output: Up to 6700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

3000K





Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 600 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
24W	26W	34V	700mA	80	2700K	90°	3500lm	2850lm	S6SM-8279024N-BG
					3000K	90°	3700lm	3000lm	S6SM-8309024N-BG
					4000K	90°	4000lm	3300lm	S6SM-8409024N-BG
					2700K-6500K	90°	Max.4100lm	Max.3400lm	S6SM-8T29024N-BG
36W	38W	34V	1050mA	80	2700K	90°	5800lm	4750lm	S6SM-8279036N-BG
					3000K	90°	6200lm	5000lm	S6SM-8309036N-BG
					4000K	90°	6600lm	5300lm	S6SM-8409036N-BG
					2700K-6500K	90°	Max.6600lm	Max.5700lm	S6SM-8T29036N-BG
46W	48W	34V	1400mA	80	2700K	90°	7200lm	5850lm	S6SM-8279046N-BG
					3000K	90°	8100lm	6150lm	S6SM-8309046N-BG
					4000K	90°	8600lm	6700lm	S6SM-8409046N-BG
Uplight Module									
18W	20W	36V	500mA	80	2700K	110°	2700lm	2200lm	UM60-827A118N-NN
					3000K	110°	2850lm	2400lm	UM60-830A118N-NN
					4000K	110°	3000lm	2600lm	UM60-840A118N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

S6SM	–	***		**		**		*	–	**		*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Accessory**
S6SM SUGAR 600 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**24** 24W		**N** No Driver		**WW** White-White		**U** Uplight Module
S6PW SUGAR 600 Pendant Wires		**830** CRI80/ 3000K				**36** 36W		**F** On-Off		**BB** Black-Black		
S6PR SUGAR 600 Pendant Rod		**840** CRI80/ 4000K				**46** 46W *		**P** Phase Dim		**BG** Black-Gold		
		8T2 CRI80 2700K-6500K Tunable White						**A** 0-10V Dim		**WG** White-Gold (Optional)		
		927 CRI90/ 2700K						**D** DALI Dim				
		930 CRI90/ 3000K										
		940 CRI90/ 4000K										
		9T2 CRI90 2700K-6500K Tunable White										

* LED 46W is not available with Tunable White

Optional Uplight Module



Code for S6SM-8309036N-BG with Uplight Module S6SM-8309036N-BG-U

Magnetic Uplight Module 600


SUGAR 900 – Ceiling Light






Quick Info

- LED: 60W, CRI>80, CRI>90
- CCT: 2700K, 3000K, 4000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 8700lm System Luminous Flux
- IP Class: IP40 from Front
- LED Driver: On-Off, 0-10V Dim, DALI Dim



Light Distribution

3000K



Finish

Surface/ Wall Mounted



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Rod Mounted

* Field cuttable pendant rod solution optional
* Standard pendant rod length: 1000mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Pendant Wires Mounted

* Standard pendant Wires length: 1200mm



Black-Black (BB) Black-Gold (BG) White-White (WW)

Order Info (Surface/ Wall Mounted SUGAR 900 in Black -Gold Finish as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
60W	62W	43V	1400mA	80	2700K	110°	9900lm	7500lm	S9SM-8279060N-BG
					3000K	90°	10500lm	7900lm	S9SM-8309060N-BG
					4000K	90°	11000lm	8700lm	S9SM-8409060N-BG
Uplight Module									
25W	28W	36V	700mA	80	2700K	110°	4200lm	3200lm	UM90-827A128N-NN
					3000K	110°	4500lm	3400lm	UM90-830A128N-NN
					4000K	110°	4800lm	3600lm	UM90-840A128N-NN

Code Remark: N=N(No Driver) F=F(ON-OFF) A=A(0-10V Dim) D=D(DALI Dim)

Coding

S9SM	–	***		**		**		*	–	**		*
Model		**CRI/ CCT**		**Beam Angle**		**LED Power**		**Control**		**Finish**		**Accessory**
S9SM SUGAR 900 Surface/ Wall Mounted		**827** CRI80/ 2700K		**90** 90°		**60** 60W		**N** No Driver		**WW** White-White		**U** Uplight Module
S9PW SUGAR 900 Pendant Wires		**830** CRI80/ 3000K						**F** On-Off		**BB** Black-Black		
S9PR SUGAR 900 Pendant Rod		**840** CRI80/ 4000K						**A** 0-10V Dim		**BG** Black-Gold		
		927 CRI90/ 2700K						**D** DALI Dim		**WG** White-Gold (Optional)		
		930 CRI90/ 3000K										
		940 CRI90/ 4000K										

Optional Uplight Module



Code for S9SM-8309060N-BG with Uplight Module S9SM-8309060N-BG-U

Magnetic Uplight Module 900

GLAMOR

IP44, UGR≤19
Surface Mounted and Pendant
Lumen efficiency up to 130 lm/W
3000K-3500K-4000K CCT Switchable
Three diameters available: Ø300, Ø400, Ø600




GLAMOR 300 – CCT Switchable Ceiling Light



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | 5 YEARS GUARANTEE


Quick Info

- LED: 8W, 11W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 1200lm, 1600lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim



Light Distribution

☐ 4000K

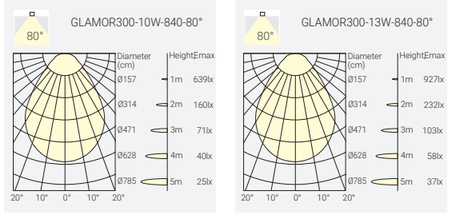

Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White



Black

Order Info (Surface/ Wall Mounted GLAMOR 300 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8W	10W	33V	250mA	80	@3000K	80°	1650lm	1100lm	G3RS-8S38010F-WN
					@3500K	80°	1700lm	1150lm	
					@4000K	80°	1800lm	1200lm	
11W	13W	33V	350mA	80	@3000K	80°	2150lm	1450lm	G3RS-8S38013F-WN
					@3500K	80°	2200lm	1500lm	
					@4000K	80°	2300lm	1600lm	

Code Remark: F=F(On-Off) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

G3RS	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
G3RS GLAMOR 300 Surface/ Wall Mounted		**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**10** 10W	**F** On-Off		**W** White	**N** None		
G3RW GLAMOR 300 Pendant Wires				**13** 13W	**P** Phase Dim		**B** Black			
					A 0-10V Dim					
					D DALI Dim					


GLAMOR 400 – CCT Switchable Ceiling Light



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | 5 YEARS GUARANTEE


Quick Info


- LED: 16W, 23W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 2400lm, 3400lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

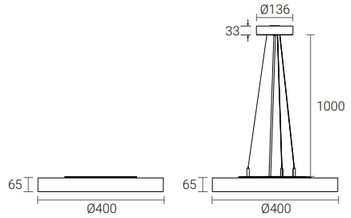

Light Distribution

☐ 4000K





Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White



Black

Order Info (Surface/ Wall Mounted GLAMOR 400 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	@3000K	80°	3100lm	2200lm	G4RS-8S38018F-WN
					@3500K	80°	3200lm	2300lm	
					@4000K	80°	3300lm	2400lm	
23W	25W	33V	700mA	80	@3000K	80°	4400lm	3100lm	G4RS-8S38025F-WN
					@3500K	80°	4550lm	3200lm	
					@4000K	80°	4650lm	3400lm	

Code Remark: F=F(On-Off) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

G4RS	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
G4RS GLAMOR 400 Surface/ Wall Mounted		**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**18** 18W	**F** On-Off		**W** White	**N** None		
G4RW GLAMOR 400 Pendant Wires				**25** 25W	**P** Phase Dim		**B** Black			
					A 0-10V Dim					
					D DALI Dim					


GLAMOR 400 – CCT Switchable Ceiling Light



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | Microwave Sensor | 5 YEARS GUARANTEE


Quick Info

- LED: 16W, 23W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 2400lm, 3400lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off LED Driver+Microwave Sensor



Light Distribution

☐ 4000K

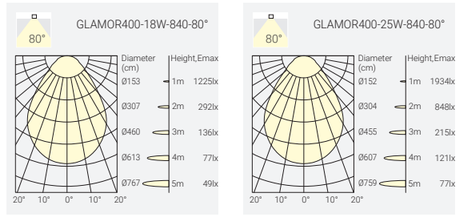

Order Info (Surface/ Wall Mounted GLAMOR 400 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	@3000K @3500K @4000K	80° 80° 80°	3100lm 3200lm 3300lm	2200lm 2300lm 2400lm	G4RS-8S38018S-WN
23W	25W	33V	700mA	80	@3000K @3500K @4000K	80° 80° 80°	4400lm 4550lm 4650lm	3100lm 3200lm 3400lm	G4RS-8S38025S-WN

Code Remark: S=(On-Off LED Driver+Microwave Sensor)

Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Coding

G4RS	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
G4RS GLAMOR 400 Surface/ Wall Mounted **G4RW** GLAMOR 400 Pendant Wires		**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**18** 18W **25** 25W	**S** On-Off LED Driver +Microwave Sensor		**W** White **B** Black	**N** None		


GLAMOR 400 – CCT Switchable Ceiling Light



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | Emergency Backup | 5 YEARS GUARANTEE


Quick Info

- LED: 16W, 23W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 2400lm, 3400lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off LED Driver+Emergency Backup

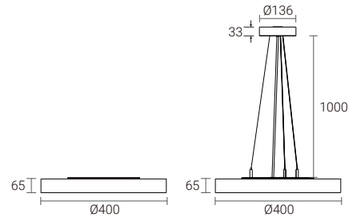

Light Distribution

☐ 4000K

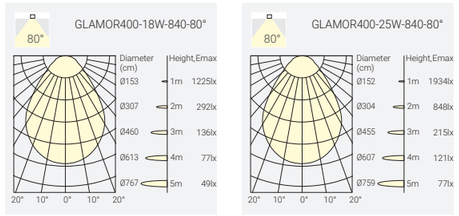

Finish

Surface/ Wall Mounted



White Black

Pendant Wires Mounted
* Standard pendant Wires length: 1000mm



White Black

Order Info (Surface/ Wall Mounted GLAMOR 400 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
16W	18W	33V	500mA	80	@3000K @3500K @4000K	80° 80° 80°	3100lm 3200lm 3300lm	2200lm 2300lm 2400lm	G4RS-8S38018E-WN
23W	25W	33V	700mA	80	@3000K @3500K @4000K	80° 80° 80°	4400lm 4550lm 4650lm	3100lm 3200lm 3400lm	G4RS-8S38025E-WN

Emergency lighting duration: 180mins
Emergency power: 3W

Code Remark: E=(On-Off LED Driver+Emergency Backup)

Coding

G4RS	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
G4RS GLAMOR 400 Surface/ Wall Mounted **G4RW** GLAMOR 400 Pendant Wires		**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**18** 18W **25** 25W	**E** On-Off LED Driver +Emergency Backup		**W** White **B** Black	**N** None		


GLAMOR 600 – CCT Switchable Ceiling Light



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | 5 YEARS GUARANTEE


Quick Info

- LED: 34W, 40W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 5300lm, 5900lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off, Phase Dim, 0-10V Dim, DALI Dim

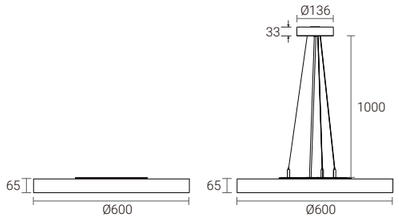

Light Distribution

☐ 4000K

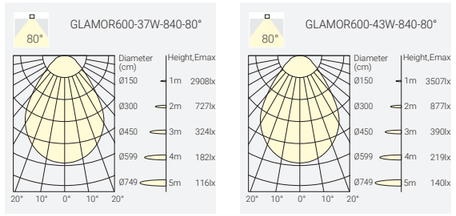

Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted

* Standard pendant Wires length: 1000mm



White



Black

Order Info (Surface/ Wall Mounted GLAMOR 600 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
34W	37W	33V	1050mA	80	@3000K @3500K @4000K	80° 80° 80°	6650lm 6800lm 6950lm	5000lm 5200lm 5300lm	G6RS-8S38037F-WN
40W	43W	33V	1200mA	80	@3000K @3500K @4000K	80° 80° 80°	7500lm 7650lm 7800lm	5600lm 5700lm 5900lm	G6RS-8S38043F-WN

Code Remark: F=F(On-Off) P=P(Phase Dim) A=A(0-10V Dim) D=D(DALI Dim)

Coding

G6RS – ***	**	**	*	– *	*	– *
Model	**CRI/ CCT**	**Beam Angle**	**Power**	**Control**	**Finish**	**Reflector Color**	**Accessory**
G6RS GLAMOR 600 Surface/ Wall Mounted **G6RW** GLAMOR 600 Pendant Wires	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**37** 37W **43** 43W	**F** On-Off **P** Phase Dim **A** 0-10V Dim **D** DALI Dim	**W** White **B** Black	**N** None	


GLAMOR 600 – CCT Switchable Ceiling Light



80° | 3000K 3500K 4000K | CRI >80 | UGR<19 | IP44 | CE | Microwave Sensor | 5 YEARS GUARANTEE


Quick Info

- LED: 34W, 40W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 5300lm, 5900lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off LED Driver+Microwave Sensor

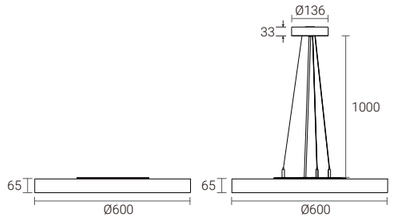

Light Distribution

☐ 4000K

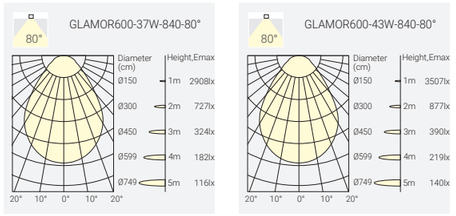

Microwave Sensor

Order Info (Surface/ Wall Mounted GLAMOR 600 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
34W	37W	33V	1050mA	80	@3000K @3500K @4000K	80° 80° 80°	6650lm 6800lm 6950lm	5000lm 5200lm 5300lm	G6RS-8S38037S-WN
40W	43W	33V	1200mA	80	@3000K @3500K @4000K	80° 80° 80°	7500lm 7650lm 7800lm	5600lm 5700lm 5900lm	G6RS-8S38043S-WN

Code Remark: S=(On-Off LED Driver+Microwave Sensor)

Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted

* Standard pendant Wires length: 1000mm



White



Black

Coding

G6RS – ***	**	**	*	– *	*	*	– *
Model	**CRI/ CCT**	**Beam Angle**	**Power**	**Control**	**Finish**	**Reflector Color**	**Accessory**
G6RS GLAMOR 600 Surface/ Wall Mounted **G6RW** GLAMOR 600 Pendant Wires	**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**37** 37W **43** 43W	**S** On-Off LED Driver +Microwave Sensor	**W** White **B** Black	**N** None	


GLAMOR 600 – CCT Switchable Ceiling Light






Quick Info


- LED: 34W, 40W, CRI>80
- CCT: 3000K-3500K-4000K Switchable
- Beam Angle: 80°
- Lumen Output: Up to 5300lm, 5900lm System Luminous Flux
- IP Class: IP44
- LED Driver: On-Off LED Driver+Emergency Backup

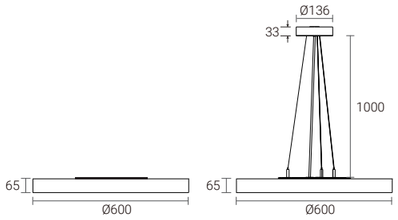

Light Distribution

☐ **4000K**





Finish

Surface/ Wall Mounted



White



Black

Pendant Wires Mounted

* Standard pendant Wires length: 1000mm



White



Black

Order Info (Surface/ Wall Mounted GLAMOR 600 in White Housing as an Example)

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
34W	37W	33V	1050mA	80	@3000K	80°	6650lm	5000lm	G6RS-8S38037E-WN
					@3500K	80°	6800lm	5200lm	
					@4000K	80°	6950lm	5300lm	
40W	43W	33V	1200mA	80	@3000K	80°	7500lm	5600lm	G6RS-8S38043E-WN
					@3500K	80°	7650lm	5700lm	
					@4000K	80°	7800lm	5900lm	

Emergency lighting duration: 180mins
Emergency power: 3W

Code Remark: E=(On-Off LED Driver+Emergency Backup)

Coding

G6RS	–	***	**	**	*	–	*	*	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**	**Reflector Color**		**Accessory**
G6RS GLAMOR 600 Surface/ Wall Mounted **G6RW** GLAMOR 600 Pendant Wires		**8S3** CRI>80/ 3000K -3500K-4000K Switchable	**80** 80°	**37** 37W **43** 43W	**E** On-Off LED Driver +Emergency Backup		**W** White **B** Black	**N** None		



MINT

IP54
Power Switchable
Sensor function available
Emergency function and Microwave
2700K-3000K-4000K CCT Switchable
Two sizes for options: Ø280mm and Ø420mm




MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK09 | IP54 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off



Light Distribution

3000K

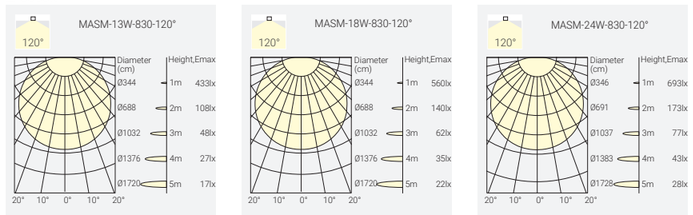

Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224F-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224F-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224F-WN

Code Remark: F=F(On-Off LED Driver, Power Switchable)


MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light




120° | CRI >80 | IK09 | IP54 | CE | UKCA | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Microwave Sensor





Light Distribution

3000K

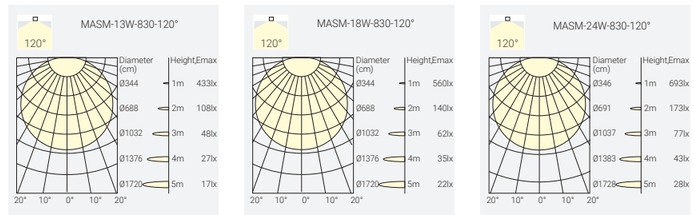

Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224S-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224S-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224S-WN

Code Remark: S=S(On-Off LED Driver+Microwave Sensor)


MINT 280 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK09 | IP54 | CE | UKCA | Emergency Backup | 5 YEARS GUARANTEE


Quick Info


- Power Switchable 13W-18W-24W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 2350lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Emergency Backup




Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12W	13W	78V	155mA	80	@2700K @3000K @4000K	120° 120° 120°	1600lm 1700lm 1800lm	1350lm 1400lm 1500lm	MASM-8S3A224E-WN
16W	18W	78V	200mA	80	@2700K @3000K @4000K	120° 120° 120°	2000lm 2100lm 2200lm	1700lm 1800lm 1900lm	MASM-8S3A224E-WN
22W	24W	78V	280mA	80	@2700K @3000K @4000K	120° 120° 120°	2400lm 2550lm 2600lm	2100lm 2200lm 2350lm	MASM-8S3A224E-WN

Emergency lighting duration: 120mins
Emergency power: 3W

Code Remark: E=E(On-Off LED Driver+Emergency Backup)

MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK09 | IP54 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off




Light Distribution

3000K







Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K @3000K @4000K	120° 120° 120°	2100lm 2200lm 2400lm	1900lm 2050lm 2200lm	MBSM-8S3A235F-WN
26W	28W	130V	190mA	80	@2700K @3000K @4000K	120° 120° 120°	2800lm 3000lm 3300lm	2550lm 2800lm 3000lm	MBSM-8S3A235F-WN
32W	35W	130V	250mA	80	@2700K @3000K @4000K	120° 120° 120°	3400lm 3700lm 4000lm	3100lm 3400lm 3600lm	MBSM-8S3A235F-WN

Code Remark: F=F(On-Off LED Driver, Power Switchable)

MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light




120° | CRI >80 | IK09 | IP54 | CE | UKCA | Microwave Sensor | 5 YEARS GUARANTEE

Quick Info


- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Microwave Sensor





Light Distribution

3000K

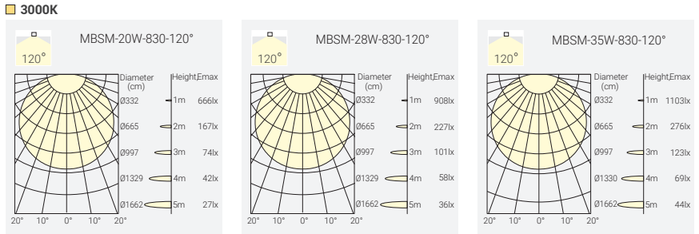

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K	120°	2100lm	1900lm	MBSM-8S3A235S-WN
					@3000K	120°	2200lm	2050lm	
					@4000K	120°	2400lm	2200lm	
26W	28W	130V	190mA	80	@2700K	120°	2800lm	2550lm	MBSM-8S3A235S-WN
					@3000K	120°	3000lm	2800lm	
					@4000K	120°	3300lm	3000lm	
32W	35W	130V	250mA	80	@2700K	120°	3400lm	3100lm	MBSM-8S3A235S-WN
					@3000K	120°	3700lm	3400lm	
					@4000K	120°	4000lm	3600lm	

Code Remark: S=S(On-Off LED Driver+Microwave Sensor)

Finish



White


MINT 420 – CCT Switchable & Power Switchable LED Ceiling Light



120° | CRI >80 | IK09 | IP54 | CE | UKCA | Emergency Backup | 5 YEARS GUARANTEE


Quick Info

- Power Switchable 20W-28W-35W, CRI>80
- CCT Switchable 2700K-3000K-4000K
- Beam Angle: 120°
- Lumen Output: Up to 3600lm System Luminous Flux
- IP Class: IP54
- LED Driver: On-Off LED Driver+Emergency Backup



Light Distribution

3000K

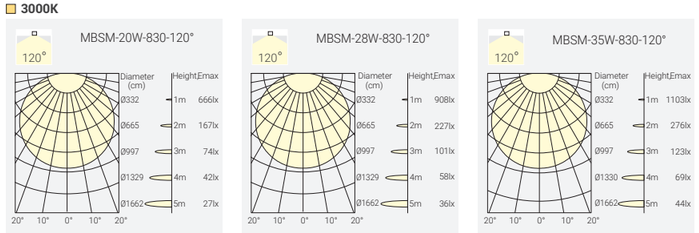

Finish



White

Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18W	20W	130V	138mA	80	@2700K	120°	2100lm	1900lm	MBSM-8S3A235E-WN
					@3000K	120°	2200lm	2050lm	
					@4000K	120°	2400lm	2200lm	
26W	28W	130V	190mA	80	@2700K	120°	2800lm	2550lm	MBSM-8S3A235E-WN
					@3000K	120°	3000lm	2800lm	
					@4000K	120°	3300lm	3000lm	
32W	35W	130V	250mA	80	@2700K	120°	3400lm	3100lm	MBSM-8S3A235E-WN
					@3000K	120°	3700lm	3400lm	
					@4000K	120°	4000lm	3600lm	

Emergency lighting duration: 120mins
Emergency power: 3W

Code Remark: E=E(On-Off LED Driver+Emergency Backup)

SPIN

355° rotatable head
Dual-emission wall light
Convex lens with rainbow-edge effect
Electroplated finish in refined metallic tones



SPIN – Wall Light


New



90° 90° | 3000K | CRI >90 | IP20 | CE | LUMINUS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- General Lighting
- LUMINUS LED: 5W, CRI>90
- CCT: 3000K Available as Standard
- Beam Angle: 90°
- Lumen Output: Up to 510lm System Luminous Flux
- LED Driver: On-Off, Phase Dim, DALI Dim



Light Distribution

3000K



Finish



Champagne Black(CB)



Brushed Nickel(BN)


Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Code
5W	6W	36V	150mA	90	3000K	90°	510lm	SPIN-9309006F-CB SPIN-9309006F-BN SPIN-9309006P-CB SPIN-9309006P-BN SPIN-9309006D-CB SPIN-9309006D-BN

Code Remark: F=F(ON-OFF) P=P(Phase Dim) D=D(DALI Dim)

Coding

SPIN	–	**	**	**	*	–	**	–	*
Model		**CRI/ CCT**	**Beam Angle**	**Power**	**Control**		**Finish**		**Accessory**
SPIN SPIN		**930** CRI90/ 3000K	**90** 90°	**06** 6W	**F** On-Off **P** Phase Dim **D** DALI Dim		**CB** Chrome Black **BN** Brushed Nickel		

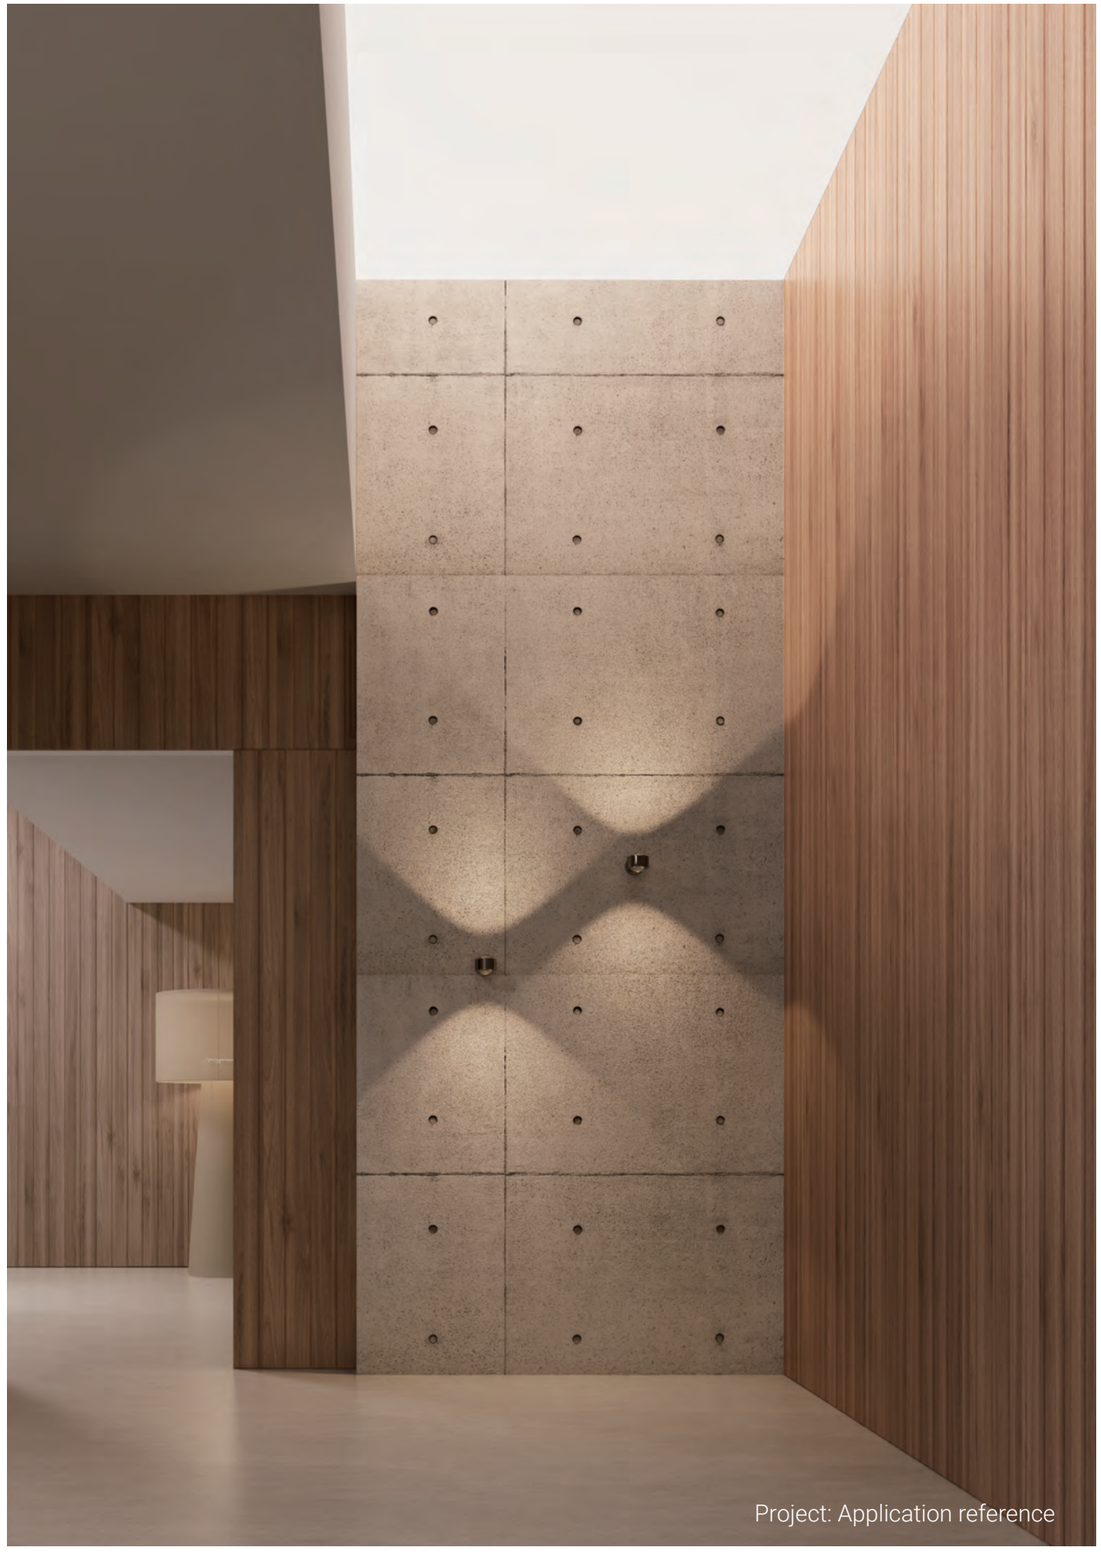


LED Strip Light

SL2835A, Standard LED Strip Light
SL2835B, High Efficiency LED Strip Light
SL5050C, RGBW LED Strip Light
SL2835D, FCOB LED Strip Light

Modeling:

SL 2835 A - 24 - 120 - 12W - 65

- Range: SL (Strip Light)
- LED: 2835 5050
- Series: A B C D
- Input Voltage(V): DC24
- LED QTY/M: 60 70 120 140 304 308 420
- Typical Wattage(W/m): 6 9 10 12 14 19 24
- IP Rating: IP20 IP54 IP65

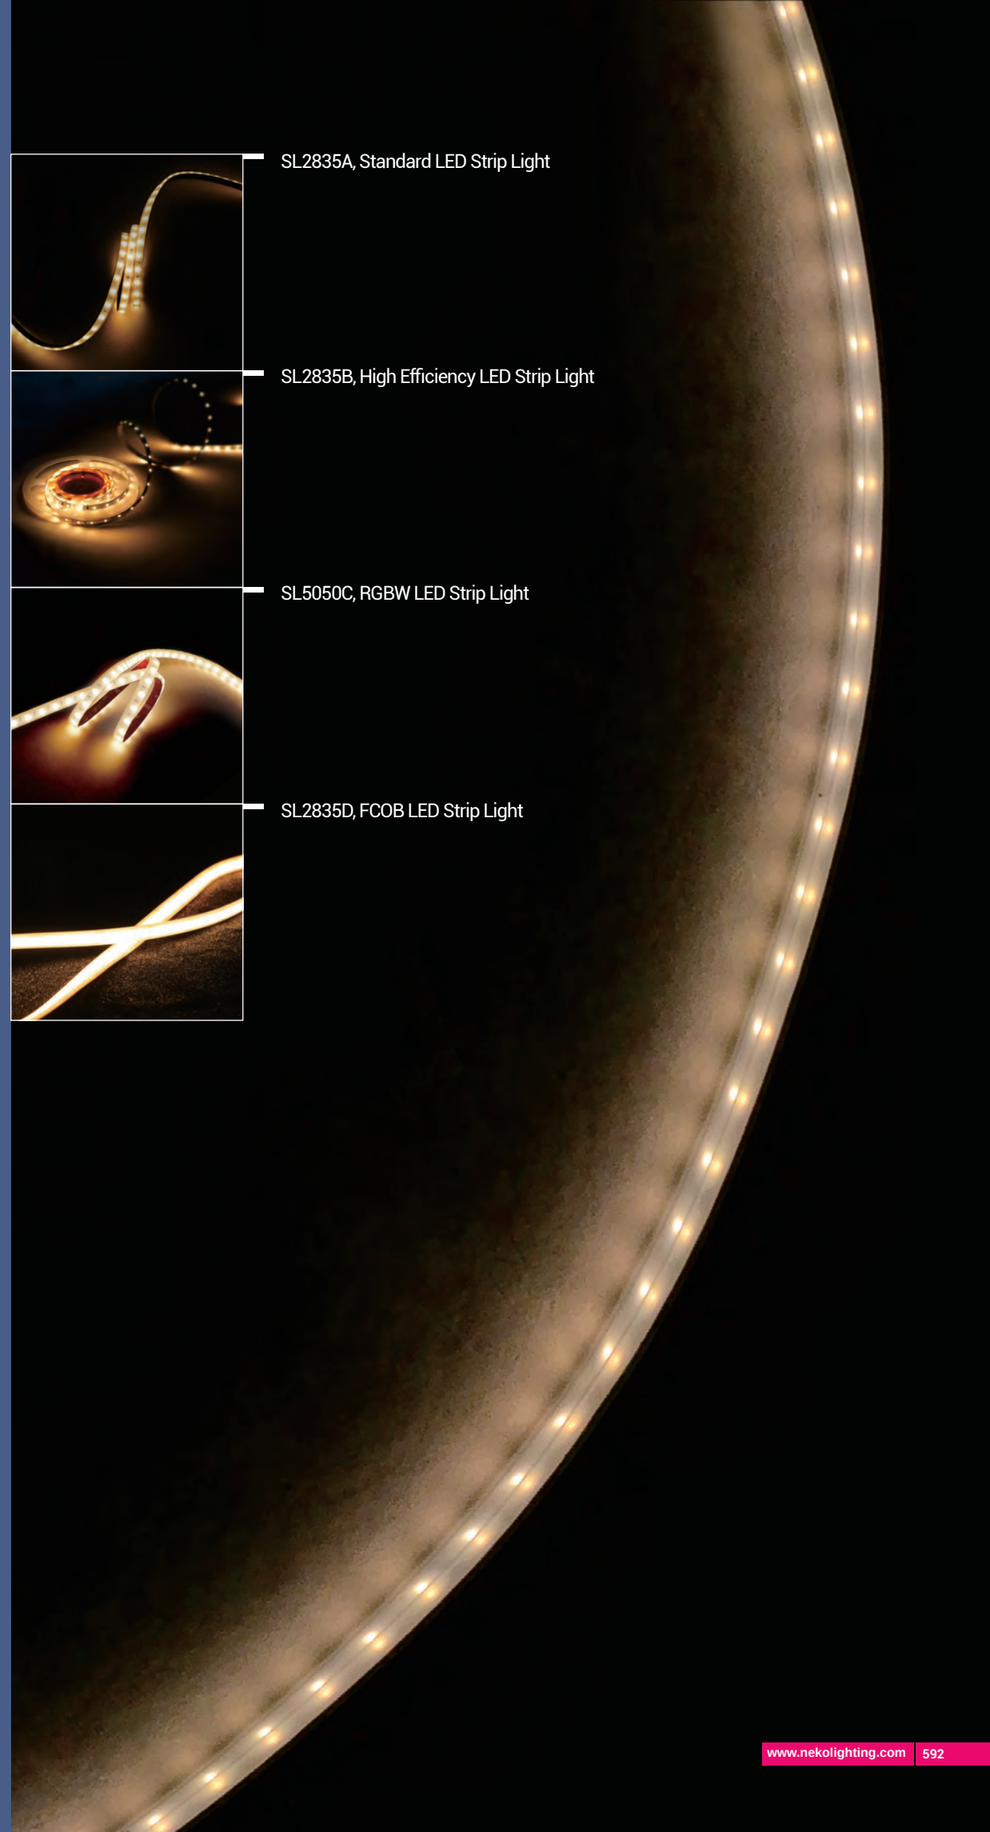

LED Strip Light

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	IP Rating	CCT	Ra	Width (mm)	Length (M)	Min. Cutting unit	Min. Cutting length (mm)	lm/M @3000K	lm/W	Warranty (yrs)
SL2835A, Standard LED Strip Light														
SL2835A	SL2835A-24-060-6W-20	DC24	60	6	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8/10	5	6 LEDS	100	540/480	90/80	5 yrs
	SL2835A-24-060-9W-20	DC24	60	9	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8/10	5	6 LEDS	100	810/730	90/80	5 yrs
	SL2835A-24-120-6W-20	DC24	120	6	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8/10	5	6 LEDS	50	540/480	90/80	5 yrs
	SL2835A-24-120-9W-20	DC24	120	9	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8/10	5	6 LEDS	50	810/730	90/80	5 yrs
	SL2835A-24-120-12W-20	DC24	120	12	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	8/10	5	6 LEDS	50	1080/970	90/80	5 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	IP Rating	CCT	Ra	Width (mm)	Length (M)	Min. Cutting unit	Min. Cutting length (mm)	lm/M @3000K	lm/W	Warranty (yrs)
SL2835B, High Efficiency LED Strip Light														
SL2835B	SL2835B-24-070-6W-20	DC24	70	6	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	7 LEDS	100	590/540	110	5 yrs
	SL2835B-24-070-9W-20	DC24	70	9	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	7 LEDS	100	890/810	110	5 yrs
	SL2835B-24-140-6W-20	DC24	140	6	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	7 LEDS	50	590/540	110	5 yrs
	SL2835B-24-140-9W-20	DC24	140	9	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	7 LEDS	50	890/810	110	5 yrs
	SL2835B-24-140-12W-20	DC24	140	12	IP20/IP65	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	7 LEDS	50	1190/1080	110	5 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	IP Rating	CCT	Ra	Width (mm)	Length (M)	Min. Cutting unit	Min. Cutting length (mm)	lm/M @3000K	lm/W	Warranty (yrs)
SL5050C, RGBW LED Strip Light														
SL5050C	SL5050C-24-060-12W-20	DC24	60	12	IP20/IP65	R G B W	>80	10/12	5	6 LEDS	100	270lm for White	90	5 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	IP Rating	CCT	Ra	Width (mm)	Length (M)	Min. Cutting unit	Min. Cutting length (mm)	lm/M @3000K	lm/W	Warranty (yrs)
SL2835D, FCOB LED Strip Light														
SL2835D	SL2835D-24-308-10W-54	DC24	308	10	IP54/IP67	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	7 LEDS	22.7	900/850	95/85	5 yrs
	SL2835D-24-308-14W-54	DC24	308	14	IP54/IP67	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	7 LEDS	22.7	1190/1130	85/80	5 yrs
	SL2835D-24-304-14W-54	DC24	304	14	IP54/IP67	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	8 LEDS	26.3	1550/1460	110/104	5 yrs
	SL2835D-24-304-19W-54	DC24	304	19	IP54/IP67	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	8 LEDS	26.3	2050/1940	108/102	5 yrs
	SL2835D-24-304-24W-54	DC24	304	24	IP54/IP67	2200K 2700K 3000K 3500K 4000K 5000K	>90	10/12	5	8 LEDS	26.3	2550/2400	106/100	5 yrs



SL2835A – Standard LED Strip Light


SL2835A


- Standard version flexible LED strip light;
- Available in 2200K/ 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Color rendering index (CRI): Ra>90
- Easy installation featuring 3M VHB adhesive backing
- Top lighting and top bending
- L70B50@50,000 hours


IP20


IP65


120° | CE | CRI >90 | 24V DC | 5M REEL






Technical Specification (IP20 Version)					
Model No.	SL2835A-24-060-6W-20	SL2835A-24-060-9W-20	SL2835A-24-120-6W-20	SL2835A-24-120-9W-20	SL2835A-24-120-12W-20
Input Voltage(V)	DC24	DC24	DC24	DC24	DC24
LED QTY	60/M	60/M	120/M	120/M	120/M
Typical Wattage	6W/M	9W/M	6W/M	9W/M	12W/M
IP Rating	IP20	IP20	IP20	IP20	IP20
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/2700K/3000K/3500K/4000K/5000K				
Width	8mm	8mm	8mm	8mm	8mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	6 LEDS	6 LEDS	6 LEDS	6 LEDS	6 LEDS
Min. cutting length	100mm	100mm	50mm	50mm	50mm
Lm/M @3000K	540	810	540	810	1080
Lm/W	100	100	100	100	100
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs
Technical Specification (IP65 Version)					
Model No.	SL2835A-24-060-6W-65	SL2835A-24-060-9W-65	SL2835A-24-120-6W-65	SL2835A-24-120-9W-65	SL2835A-24-120-12W-65
Input Voltage(V)	DC24	DC24	DC24	DC24	DC24
LED QTY/M	60/M	60/M	120/M	120/M	120/M
Typical Wattage	6W/M	9W/M	6W/M	9W/M	12W/M
IP Rating	IP65	IP65	IP65	IP65	IP65
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/2700K/3000K/3500K/4000K/5000K				
Width	10mm	10mm	10mm	10mm	10mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	6 LEDS	6 LEDS	6 LEDS	6 LEDS	6 LEDS
Min. cutting length	100mm	100mm	50mm	50mm	50mm
Lm/M @3000K	480	730	480	730	970
Lm/W	90	90	90	90	90
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs


Recommended Accessories



AL Profile (to be ordered separately)



45° AL Profile (to be ordered separately)



Clips


3M Tape

Ordering Code

SL2835A – 24 – 060 – 6W – 20 – 2200K – *

Model	Input Voltage(V)	LED QTY/M	Typical Wattage/ M	IP Rating	CCT	Accessories
SL2835A	24 DC24V	060 60pcs 120 120pcs	6W 9W 12W	20 IP20 65 IP65	2200K 2700K 3000K 3500K 4000K 5000K	3M Tape Clips AL Profile 45° AL Profile




SL2835B – High Efficiency LED Strip Light


SL2835B

- High efficiency LED strip light
- Available in 2200K/ 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Color rendering index (CRI): Ra>90
- Semi-transparent silicone extrusion for IP65 with salt-mist proof
- Top lighting and top bending
- L70B50@50,000 hours






120° | CE | CRI >90 | 24V DC | 5M REEL




Technical Specification (IP20 Version)					
Model No.	SL2835B-24-070-6W-20	SL2835B-24-070-9W-20	SL2835B-24-140-6W-20	SL2835B-24-140-9W-20	SL2835B-24-140-12W-20
Input Voltage(V)	DC24	DC24	DC24	DC24	DC24
LED QTY	70/M	70/M	140/M	140/M	140/M
Typical Wattage	6W/M	9W/M	6W/M	9W/M	12W/M
IP Rating	IP20	IP20	IP20	IP20	IP20
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/2700K/3000K/3500K/4000K/5000K				
Width	10mm	10mm	10mm	10mm	10mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	7 LEDS	7 LEDS	7 LEDS	7 LEDS	7 LEDS
Min. cutting length	100mm	100mm	50mm	50mm	50mm
Lm/M @3000K	590	890	590	890	1190
Lm/W	110	110	110	110	110
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs
Technical Specification (IP65 Version)					
Model No.	SL2835B-24-070-6W-65	SL2835B-24-070-9W-65	SL2835B-24-140-6W-65	SL2835B-24-140-9W-65	SL2835B-24-140-12W-65
Input Voltage(V)	DC24	DC24	DC24	DC24	DC24
LED QTY/M	70/M	70/M	140/M	140/M	140/M
Typical Wattage	6W/M	9W/M	6W/M	9W/M	12W/M
IP Rating	IP65	IP65	IP65	IP65	IP65
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/2700K/3000K/3500K/4000K/5000K				
Width	12mm	12mm	12mm	12mm	12mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	7 LEDS	7 LEDS	7 LEDS	7 LEDS	7 LEDS
Min. cutting length	100mm	100mm	50mm	50mm	50mm
Lm/M @3000K	540	810	540	810	1080
Lm/W	100	100	100	100	100
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs


Recommended Accessories




AL Profile (to be ordered separately)



45° AL Profile (to be ordered separately)



Clips




3M Tape

Ordering Code

SL2835B – 24 – 060 – 6W – 20 – 2200K – *

Model	Input Voltage(V)	LED QTY/M	Typical Wattage/ M	IP Rating	CCT	Accessories
SL2835B	24 DC24V	070 70pcs 140 140pcs	6W 9W 12W	20 IP20 65 IP65	2200K 2700K 3000K 3500K 4000K 5000K	3M Tape Clips AL Profile 45° AL Profile

SL5050C – RGBW LED Strip Light

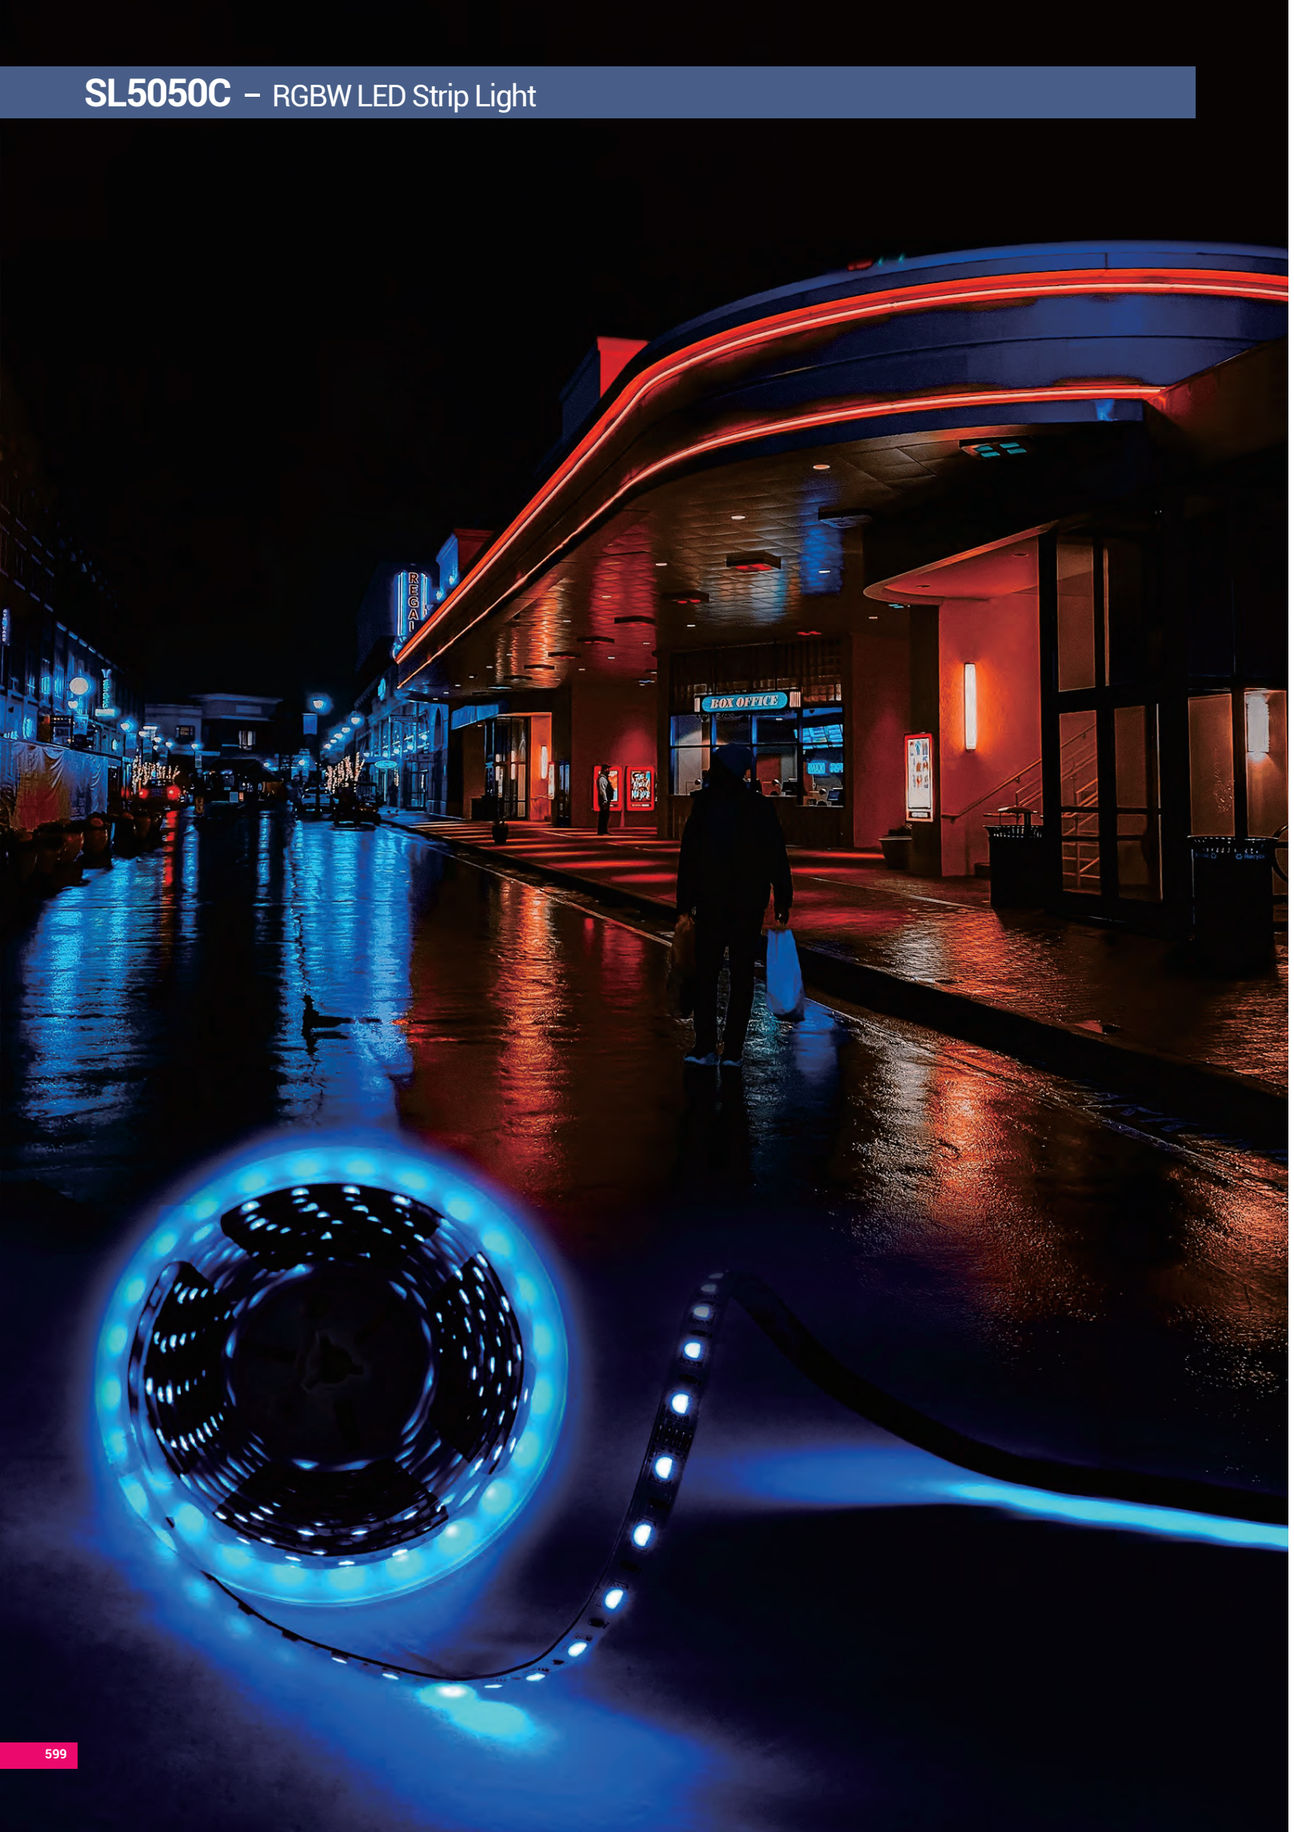


SL5050C

- RGBW colorful flexible LED strip light;
- Widely adaptable to all types of dimming and toning controller
- Color rendering index (CRI): Ra>90
- High quality FPC, high thermal 3M adhesive
- Top lighting and top bending
- L70B50@50,000 hours;


IP20



IP65

120° | CE | CRI >90 | 24V DC | 6M REEL | 60 LEDs/M

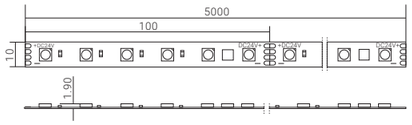


Technical Specification		
Version	IP20 Version	IP65 Version
Model No.	SL5050C-24-060-12W-20	SL5050C-24-060-12W-65
Input Voltage(V)	DC24	DC24
LED QTY	60/M	60/M
Typical Wattage	12W/M	12W/M
IP Rating	IP20	IP65
CRI	Ra>80	Ra>80
CCT	RGBW	
Width	10mm	12mm
Length	5M	5M
Min. cutting Unit	6 LEDS	6 LEDS
Min. cutting length	100mm	100mm
Lm/M @3000K	270lm for White	270lm for White
Lm/W	100	90
ERP	A+	A+
Warranty	5 yrs	5 yrs


Recommended Accessories



AL Profile (to be ordered separately)



45° AL Profile (to be ordered separately)



Clips


3M Tape

Ordering Code

SL5050C – 24 – 060 – 12W – 20 – R – *

Model	Input Voltage(V)	LED QTY/M	Typical Wattage/ M	IP Rating	CCT	Accessories
SL5050C	24 DC24V	060 60pcs	6W	20 IP20 65 IP65	R G B W	3M Tape Clips AL Profile 45° AL Profile




SL2835D – FCOB LED Strip Light


SL2835D

- Ultra-thin design with super flexible bending performance
- Seamless COB design that eliminates virtually all LED dotting
- Available in 2200K/ 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Color rendering index (CRI): Ra>90
- Easy installation featuring 3M VHB adhesive backing
- Available in silicone glue IP54/IP67 rating for indoor outdoor locations
- L70B50@50,000 hours




120° | CE | CRI >90 | 24V DC | 5M REEL






Technical Specification (IP54 Version)					
Model No.	SL2835D-24-308-10W-54	SL2835D-24-308-14W-54	SL2835D-24-304-14W-54	SL2835D-24-304-19W-54	SL2835D-24-304-24W-54
Input Voltage(V)	DC24	DC24	DC24	DC24	DC24
LED QTY	308/M	308/M	304/M	304/M	304/M
Typical Wattage	10W/M	14W/M	14W/M	19W/M	24W/M
IP Rating	IP54	IP54	IP54	IP54	IP54
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/32700K/3000K/3500K/4000K/5000K				
Width	10mm	10mm	10mm	10mm	10mm
Length	5M	5M	5M	5M	5M
Min. cutting Unit	7 LEDS	7 LEDS	8 LEDS	8 LEDS	8 LEDS
Min. cutting length	22.7mm	22.7mm	26.3mm	26.3mm	26.3mm
Lm/M @3000K	900	1190	1550	2050	2550
Lm/W	90	85	110	108	106
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs
Technical Specification (IP67 Version)					
Model No.	SL2835D-24-308-10W-67	SL2835D-24-308-14W-67	SL2835D-24-304-14W-67	SL2835D-24-304-19W-67	SL2835D-24-304-24W-67
Input Voltage(V)	DC24	DC24	DC24	DC24	DC24
LED QTY	308/M	308/M	304/M	304/M	304/M
Typical Wattage	10W/M	14W/M	14W/M	19W/M	24W/M
IP Rating	IP54	IP54	IP54	IP54	IP54
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
CCT	2200K/32700K/3000K/3500K/4000K/5000K				
Width	10mm	10mm	10mm	10mm	10mm
Length	5M	5M	5M	5M	5M
Min. cutting length	7 LEDS	7 LEDS	8 LEDS	8 LEDS	8 LEDS
Min. cutting length	22.7mm	22.7mm	22.7mm	22.7mm	22.7mm
Lm/M @3000K	850	1130	1460	1940	2400
Lm/W	85	80	104	102	100
ERP	A+	A+	A+	A+	A+
Warranty	5 yrs	5 yrs	5 yrs	5 yrs	5 yrs


Recommended Accessories




AL Profile (to be ordered separately)




45° AL Profile (to be ordered separately)



3M Tape





Ordering Code

SL2835D – 24 – 304 – 10W – 54 – 2700K – *

Model	Input Voltage(V)	LED QTY/M	Typical Wattage/ M	IP Rating	CCT	Accessories
SL2835D	24 DC24V	304 304pcs 308 308pcs 420 420pcs	10W 19W 24W	54 IP54 67 IP67	2200K 2700K 3000K 3500K 4000K 5000K	3M Tape AL Profile 45° AL Profile

LED Neon Flex

NF-1717T, 16.5*16.5mm Top Bending LED Neon Flex
NF-0817S, 8*16.5mm Side Bending LED Neon Flex
NF-1221S, 11.5*21mm Side Bending LED Neon Flex
NF-1228S, 11.5*28mm Side Bending LED Neon Flex


Modeling:

NF- 1717 T -24-120- 9W -68

- Range: NF- (Neon Flex)
- Section Size(mm): 1717 (16.5*16.5mm); 0817 (08*16.5mm); 1221 (11.5*21mm); 1228 (11.5*28mm)
- Bending Direction: T Top Bending; S Side Bending
- Input Voltage(V): Dc24
- LED QTY/M: 60 70 72 84 120 144
- Typical Wattage(W/M): 5 7.2 9 10 12 15
- IP Rating: IP68



NF-1717T Top Bending (IP68)



NF-0817S Side Bending (IP68)



NF-1221S Side Bending (IP68)



NF-1228S Side Bending (IP68)

LED Neon Flex

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	CCT	Section Size(mm)	Ra	Max.Length single feed(M)	Max.Length double feed(M)	Min. Cutting unit	Min. Cutting length (mm)	lm/M @3000K	lm/W	Warranty (yrs)
Top Bending (IP68)														
NF-1717T	NF-1717T-24-120-9W	DC24	120	9	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O LY	16.5*16.5	>90	10	20	12 LEDS	100	>300	33	5 yrs
	NF-1717T-24-144-10W	DC24	144	10	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O	16.5*16.5	>90	10	20	12 LEDS	83.3	>330	33	5 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	CCT	Section Size(mm)	Ra	Max.Length single feed(M)	Max.Length double feed(M)	Min. Cutting unit	Min. Cutting length (mm)	lm/M @3000K	lm/W	Warranty (yrs)
Side Bending (IP68)														
NF-0817S	NF-0817S-24-070-5W	DC24	70	5	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O LY	08*16.5	>90	10	20	7 LEDS	100	>110	22	5 yrs
	NF-0817S-24-120-10W	DC24	120	10	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O LY	08*16.5	>90	10	20	12 LEDS	100	>220	22	5 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	CCT	Section Size(mm)	Ra	Max.Length single feed(M)	Max.Length double feed(M)	Min. Cutting unit	Min. Cutting length (mm)	lm/M @3000K	lm/W	Warranty (yrs)
Side Bending (IP68)														
NF-1221S	NF-1221S-24-072-13W	DC24	72	13	2200K 2700K 3000K 3500K 4000K 5000K G B P LY	11.5*21	>90	8	16	6 LEDS	83.3	>340	26	5 yrs
	NF-1221S-24-060-12W	DC24	60	12	2200K 2700K 3000K 3500K 4000K 5000K G B P LY	11.5*21	>90	10	20	6 LEDS	100	>300	25	5 yrs
	NF-1221S-24-060-7.2W	DC24	60	7.2	R A O	11.5*21	>90	15	30	10 LEDS	166.7	/	N/A	5 yrs
	NF-1221S-24-072-5W	DC24	72	5	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O	11.5*21	>90	15	30	12 LEDS	166.7	>120	24	5 yrs

Primary Model	Model No.	Input Voltage (V)	LED QTY/M	Typical Wattage (W/M)	CCT	Section Size(mm)	Ra	Max.Length single feed(M)	Max.Length double feed(M)	Min. Cutting unit	Min. Cutting length (mm)	lm/M @3000K	lm/W	Warranty (yrs)
Side Bending (IP68)														
NF-1228S	NF-1228S-24-072-13W	DC24	72	13	2200K 2700K 3000K 3500K 4000K 5000K G B P LY	11.5*28	>90	8	16	6 LEDS	83.3	>340	26	5 yrs
	NF-1228S-24-060-12W	DC24	60	12	2200K 2700K 3000K 3500K 4000K 5000K G B P LY	11.5*28	>90	10	20	6 LEDS	100	>300	25	5 yrs
	NF-1228S-24-060-7.2W	DC24	60	7.2	R A O	11.5*28	>90	15	30	10 LEDS	166.7	/	N/A	5 yrs
	NF-1228S-24-072-5W	DC24	72	5	2200K 2700K 3000K 3500K 4000K 5000K R G B P A O	11.5*28	>90	15	30	12 LEDS	166.7	>120	24	5 yrs

NF-1717T – 16.5*16.5mm Top Bending IP68 LED Neon Flex





NF-1717T

- Flat surface with 120 degree beam angle
- Top bending with uniform and even light output
- High lumen output, up to 400lm/M
- Full silicone extrusion with IP68 level and high reliability with UV and yellowish resistant, even if used for a long time outdoor
- Max. run up to 20M application, at double feed, no brightness drop
- L70B50@50,000 hours



IP68 Class III IK08 RoHS CE Dirt Resistant Corrosion Resistant UV Protected Saltwater Resistant

Technical Specification		
Model	NF-1717T-24-120-9W	NF-1717T-24-144-10W
Operating voltage	DC24	DC24
Power consumption	9W/M	10W/M
Working Mode	CV	CV
LED type	SMD3528	SMD3528
CRI	Ra>90	Ra>90
Section Size	16.5*16.5mm	16.5*16.5mm
LED Quantity	120pcs/M	144pcs/M
Available CCT	2200K/2700K/3000K/3500K/4000K/5000K	
Available Color	R/G/B/P/A/O	R/G/B/P/A/O
Min. cutting Unit	12 LEDS	12 LEDS
Min. cutting length	100mm	83.3mm
Max. length single feed	10M	10M
Max. length double feed	20M	20M
Photo-electric Parameters		
Model	NF-1717T-24-120-9W	NF-1717T-24-144-10W
CCT	LM/M	LM/M
R	>110lm	>120lm
G	>360lm	>390lm
B	>54lm	>60lm
A	>80lm	>90lm
O	>70lm	>80lm
P	>320lm	>360lm
LY	>340lm	/
2200K	>300lm	>330lm
2700K	>300lm	>330lm
3000K	>300lm	>330lm
3500K	>340lm	>370lm
4000K	>340lm	>370lm
5000K	>360lm	>400lm

Ordering Code


NF-1717T – 24 120 – 9W – 2.2K – S – 01 – SM

Primary Model	Input Voltage(V)	LED QTY/M	Typical Wattage(W/m)	Color / Light Color		Connector entry type		Connector direction		Cable connector type	
NF-1717T	24 DC24V	120 120pcs	9W	2200K	2.2K	Side entry	S	Right	01	Male connetor cable	SM
		144 144pcs	10W	2700K	2.7K	Direct entry	D	Left	02	Female connector cable	SF
				3000K	3K	Bottom entry	B	Double	03	Male & female connector cable	SMF
				3500K	3.5K					Bare wire	Blank
				4000K	4K						
				5000K	5K						
				Red	R						
				Green	G						
				Blue	B						
				Amber	A						
				Orange	O						
				Pink	P						
				Lemon Yellow	LY						

Tunable, RGB, RGBW, DMX version are also available(To be ordered separately)


NF-1717T – 16.5*16.5mm Top Bending IP68 LED Neon Flex

Construction

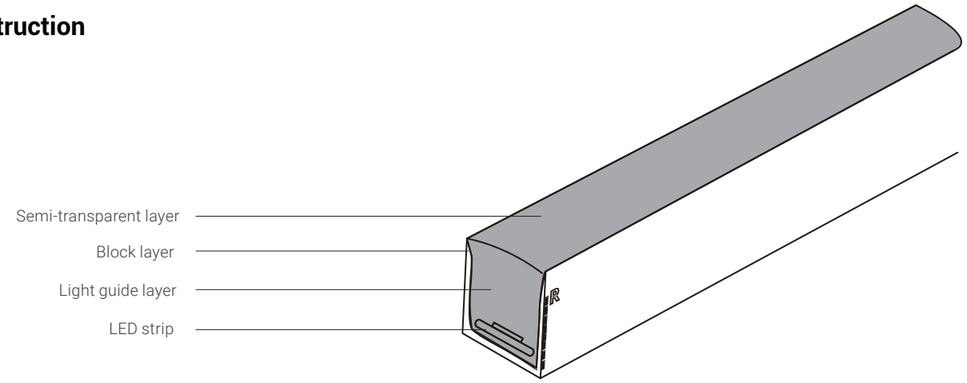


Physical Specification


Light profile

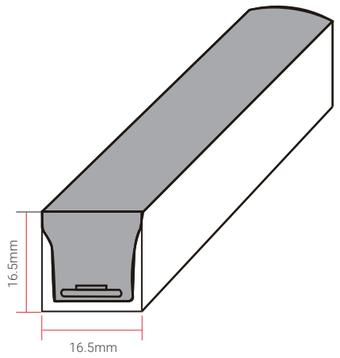


Bending direction

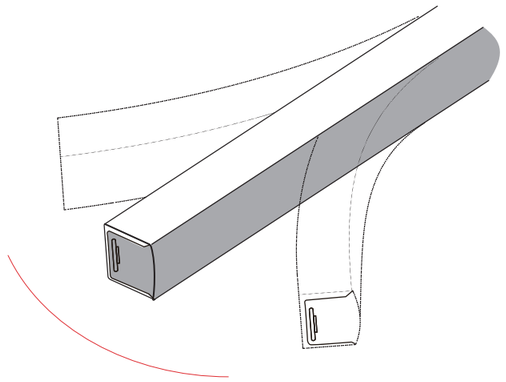


Min. bending diameter

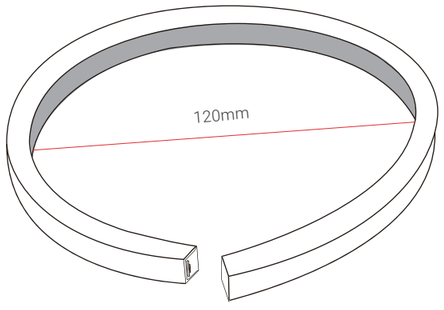

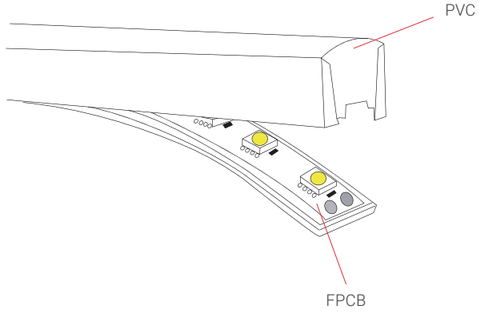



Mould injection connector


(IP68 Factory Assembly only)




① MJ-1717-A-D01
② MJ-1717-A-D01SM
③ MJ-1717-A-D02
④ MJ-1717-A-D02SF
⑤ MJ-1717-A-D03
⑥ MJ-1717-A-D03SMF




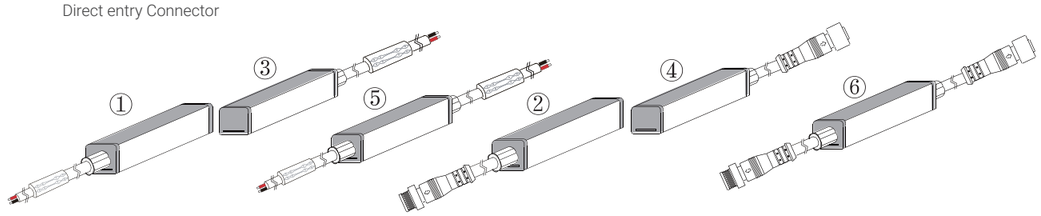





① MJ-1717-A-S01
② MJ-1717-A-S01SM
③ MJ-1717-A-S02
④ MJ-1717-A-S02SF
⑤ MJ-1717-A-S03
⑥ MJ-1717-A-S03SMF




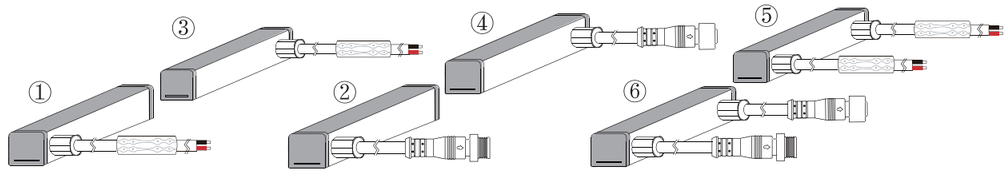



① MJ-1717-A-B01
② MJ-1717-A-B01SM
③ MJ-1717-A-B02
④ MJ-1717-A-B02SF
⑤ MJ-1717-A-B03
⑥ MJ-1717-A-B03SMF

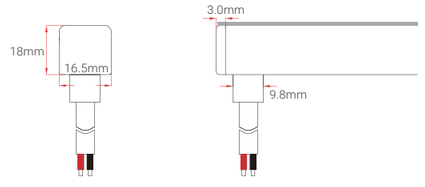


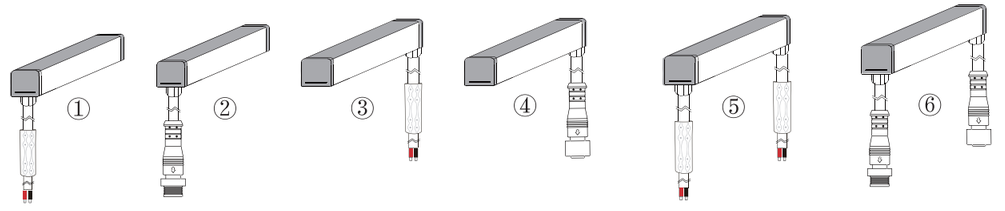


NF-1717T – 16.5*16.5mm Top Bending IP68 LED Neon Flex

Mould injection connector

(IP68 Factory Assembly only)




① MJ-1717-A-L01
② MJ-1717-A-L01SM
③ MJ-1717-A-L03
④ MJ-1717-A-L03SMF

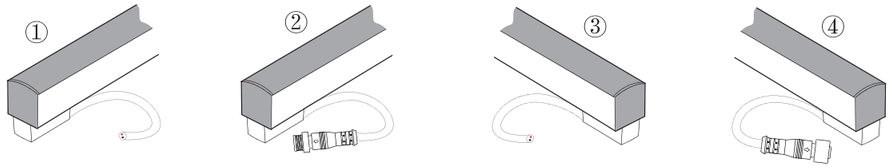


Mould injection Jumper

(IP68 Factory Assembly only)

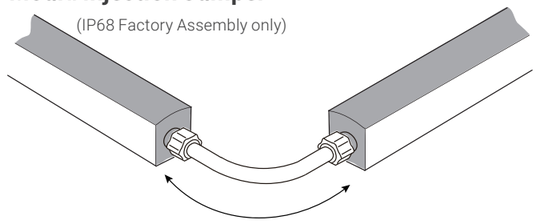

0.3m cable length


DIY snap splice connector (IP67 Only)



Model: DIY-SN-SP-1717-A


DIY Screw & Snap connector Kit (IP67 Only)

DIY screw splice connector kit

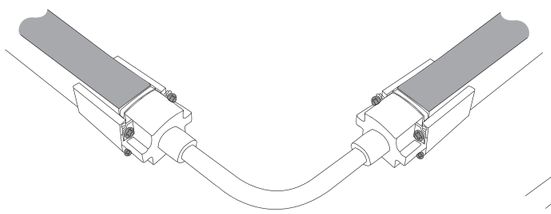


Model: DIY-SC-FR-1717-D-01-A (Right)
DIY-SC-FR-1717-D-02-A (Left)

DIY screw connector & End cap kit

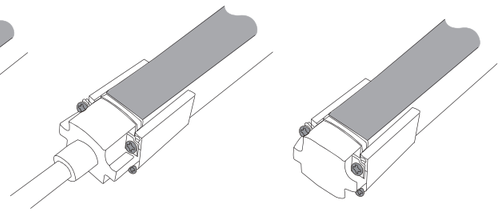


Model: DIY-SC-END-1717

DIY snap splice connector kit

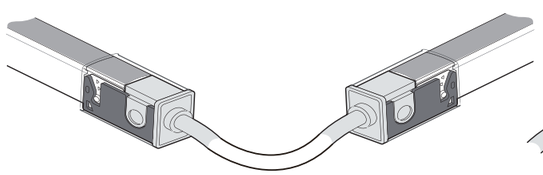

Model: DIY-SN-FR-1717-D-01-A (Right)
DIY-SN-FR-1717-D-02-A (Left)

DIY snap connector & end cap kit

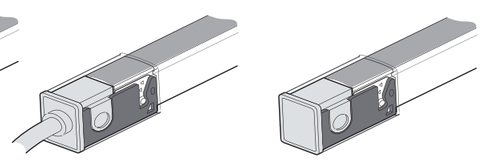


DIY-SN-END-1717-01 (Right)
DIY-SN-END-1717-02 (Left)


Other Accessories

Female & Male Connector







Female connector wire
SYZ-M12-M-2C-075-W




Middle power connector
MID-CNR-A-1T2







Male connector wire
SYZ-M12-F-2C-075-W



LED Neon Cutter
ACC-TOOL-C1



Wire stripper
ACC-TOOL-WS01



Screwdriver
ACC-TOOL-C2




Mean Well Transformer
Non-waterproof Series




Mean Well Transformer
Waterproof Series




Female & male wire connector
KJ-M12-2P-F/ KJ-M12-2P-M



Silicone Rubber
K-5905












PVC End Cap
DIY-PVC-END-1717





Assistant Tool A
CC-TOOL-C3

NF-1717T – 16.5*16.5mm Top Bending IP68 LED Neon Flex


Mounting Profile

Model	Description	Dimension	Drawing
ALC1717S02	Compatibility: NF-1717T Length option: 1m, 2m, 35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Standard		
ALC1717S08	Description: Use for: NF-1717T Length option: 1m,2m,35mm Material: Aluminum alloy Optional color:AS/AB/PW Type: Anti-drop for upside down installation		
SSC1717FLX	Use for: NF-1717T Length option: 10cm, 30cm, 50cm, 100cm Material: Stainless steel Optional color: Polished Type: Flexible		
SSC1717S01	Use for: NF-1717T Length option: 5cm Material: Stainless steel Optional color: Natural color Type: 316 stainless steel		
ACC-HX-S2830C2	Use for mounting channel for angle adjustment		

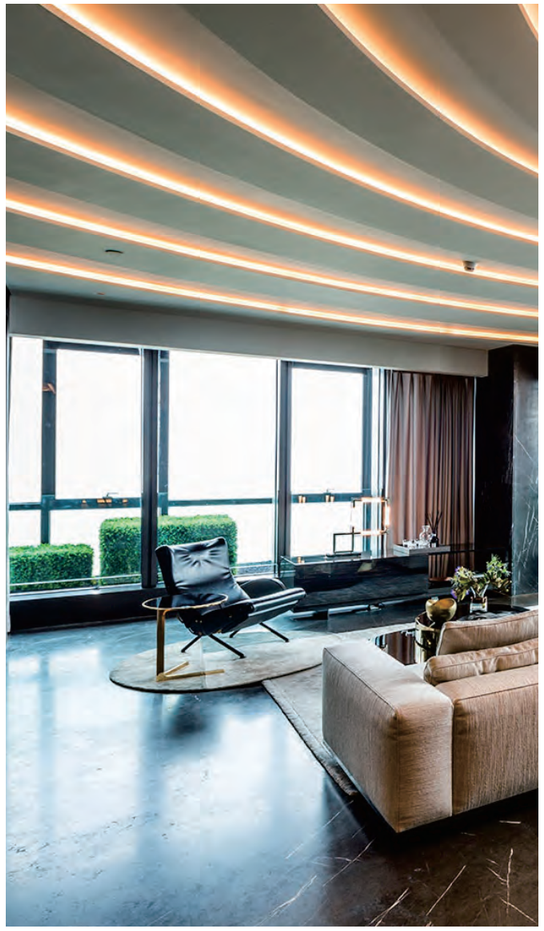

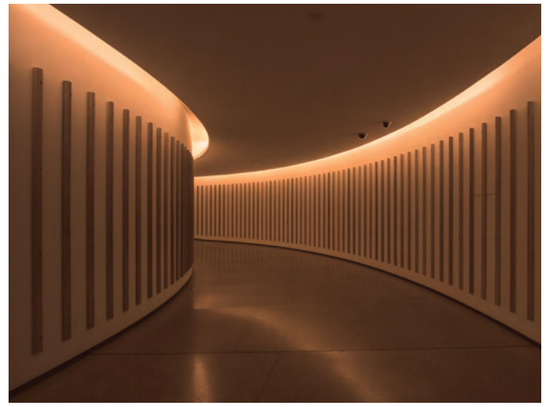



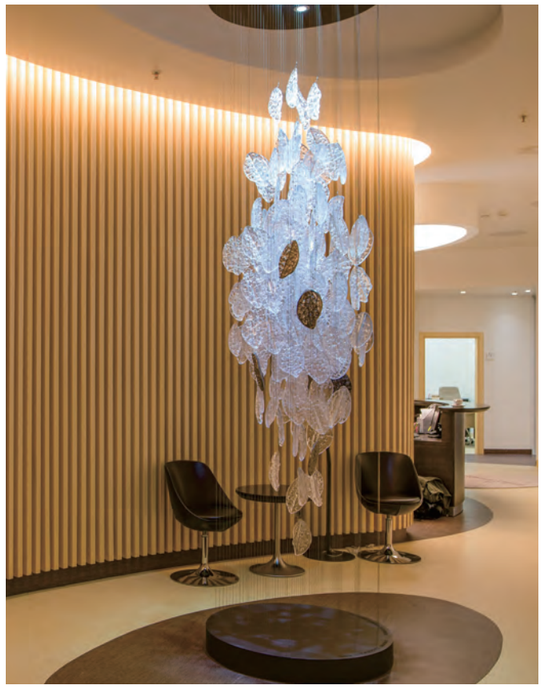


Application

Suitable for indoor and outdoor decorative lighting, architectural outline lighting, cove lighting, sign and advertising lighting.


NF-0817S – 8*16.5mm Side Bending IP68 LED Neon Flex



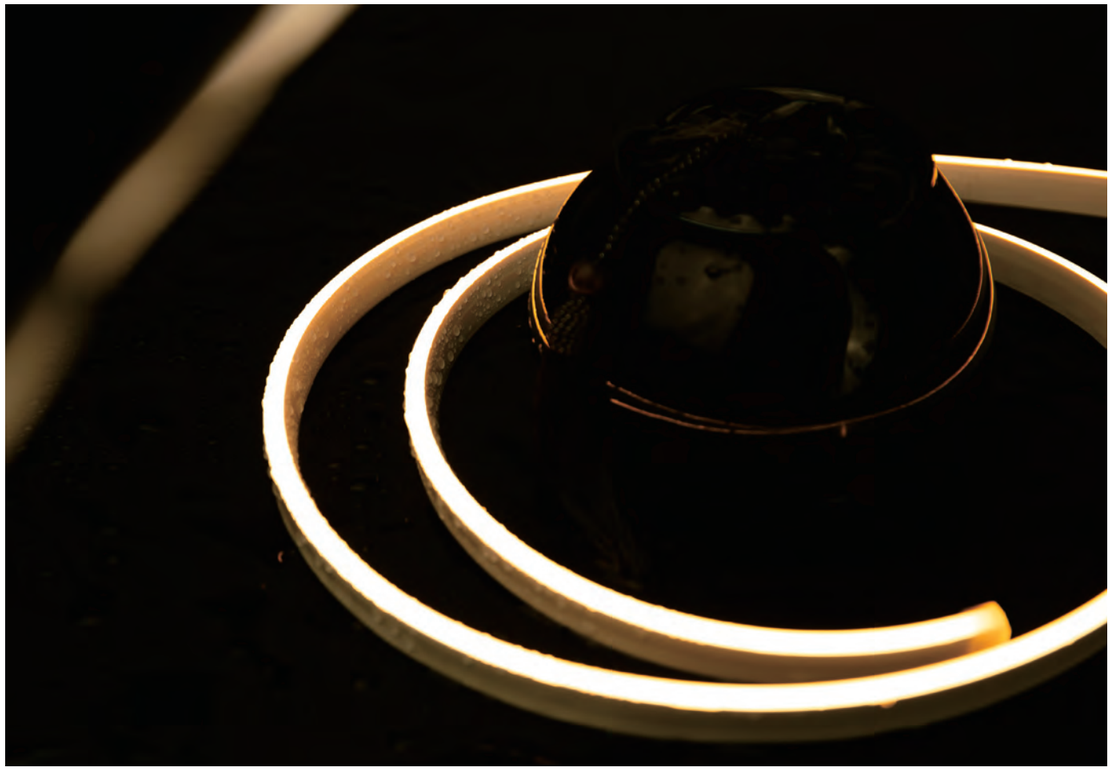

NF-0817S

- Flat surface with 120 degree beam angle
- Side bending with uniform and even light output
- High lumen output, up to 130lm/M
- Full silicone extrusion with IP68 level and high reliability with UV and yellowish resistant, even if used for a long time outdoor
- Max. run up to 20M application, at double feed, no brightness drop
- L70B50@50,000 hours



IP68 Class III IK08 RoHS CE Dirt Resistant Corrosion Resistant UV Protected Saltwater Resistant

Technical Specification		
Model	NF-0817S-24-070-5W	NF-0817S-24-120-10W
Operating voltage	DC24	DC24
Power consumption	5W/M	10W/M
Working Mode	CV	CV
LED type	SMD2835	SMD2835
CRI	Ra>90	Ra>90
Section Size	08*16.5mm	08*16.5mm
LED Quantity	70pcs/M	120pcs/M
Available CCT	2200K/2700K/3000K/3500K/4000K/5000K	
Available Color	R/G/B/LY/P/A/O	R/G/B/LY/P/A/O
Min. cutting Unit	7 LEDS	12 LEDS
Min. cutting length	100mm	100mm
Max. length single feed	10M	10M
Max. length double feed	20M	20M
Photo-electric Parameters		
Model	NF-0817S-24-070-5W	NF-0817S-24-120-10W
CCT	lm/M	lm/M
R	>40lm	>40lm
G	>70lm	>70lm
B	>13lm	>13lm
A	>40lm	>40lm
O	>32lm	>32lm
P	>55lm	>55lm
LY	>90lm	>90lm
2200K	>110lm	>110lm
2700K	>110lm	>110lm
3000K	>110lm	>110lm
3500K	>120lm	>120lm
4000K	>120lm	>120lm
5000K	>130lm	>130lm


Ordering Code

NF-0817S – 24 070 – 5W – 2.2K – S – 01 – SM

Primary Model	Input Voltage(V)	LED QTY/M	Typical Wattage(W/m)	Color / Light Color	Connector entry type	Connector direction	Cable connector type
NF-0817S	24 DC24V	070 70pcs	5W	2200K 2.2K	Side entry S	Right 01	Male connetor cable SM
		120 120pcs	10W	2700K 2.7K	Direct entry D	Left 02	Female connector cable SF
				3000K 3K	Bottom entry B	Double 03	Male & female connector cable SMF
				3500K 3.5K			Bare wire Blank
				4000K 4K			
				5000K 5K			
				Red R			
				Green G			
				Blue B			
				Amber A			
				Orange O			
				Pink P			
				Lemon Yellow LY			


NF-0817S – 8*16.5mm Side Bending IP68 LED Neon Flex

Construction

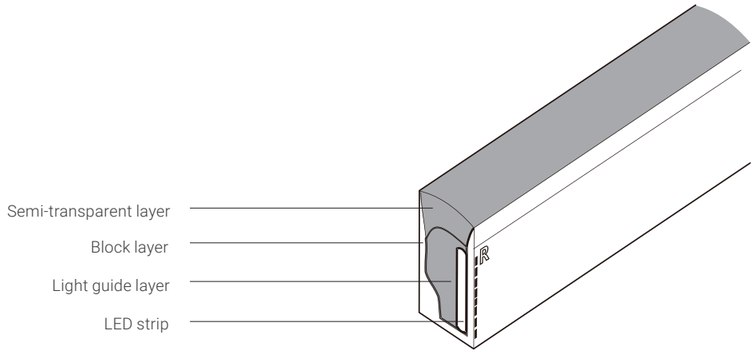


Physical Specification


Light profile




Bending direction

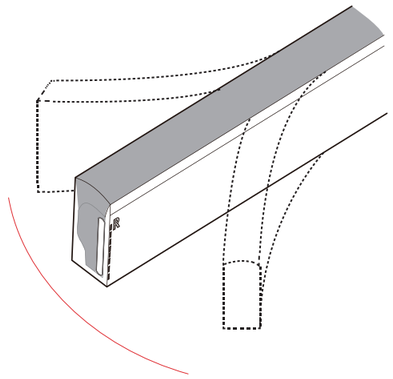


Min. bending diameter

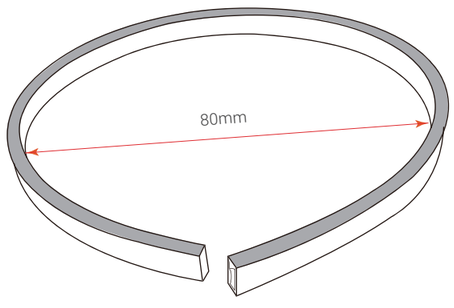

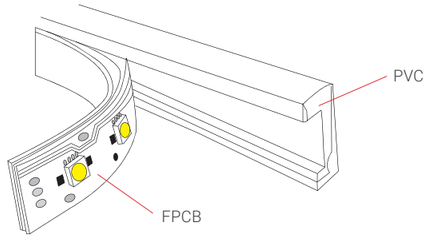


Mould injection connector


(IP68 Factory Assembly only)

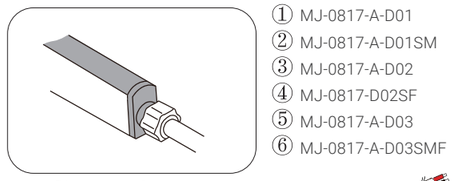


① MJ-0817-A-D01
② MJ-0817-A-D01SM
③ MJ-0817-A-D02
④ MJ-0817-D02SF
⑤ MJ-0817-A-D03
⑥ MJ-0817-A-D03SMF

Direct entry Connector




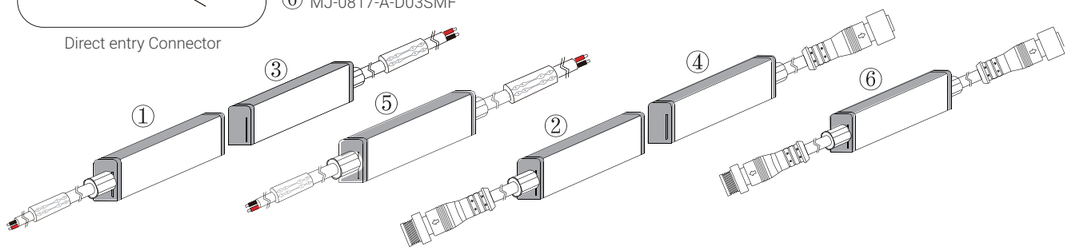


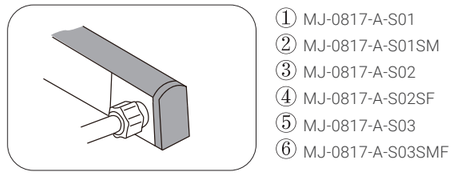


① MJ-0817-A-S01
② MJ-0817-A-S01SM
③ MJ-0817-A-S02
④ MJ-0817-A-S02SF
⑤ MJ-0817-A-S03
⑥ MJ-0817-A-S03SMF

Side entry Connector

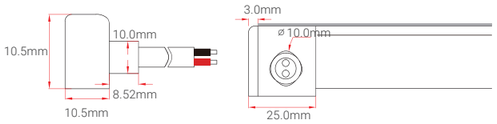


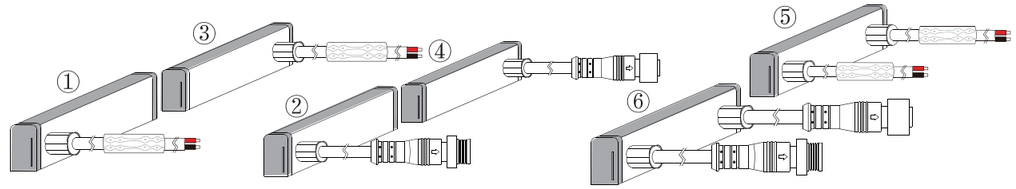




① MJ-0817-A-B01
② MJ-0817-A-B01SM
③ MJ-0817-A-B02
④ MJ-0817-A-B02SF
⑤ MJ-0817-A-B03
⑥ MJ-0817-A-B03SFM

Bottom entry Connector

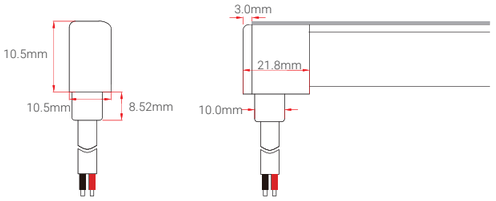

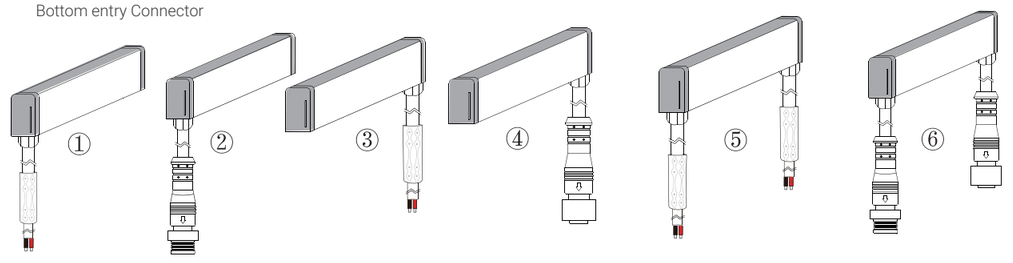


NF-0817S – 8*16.5mm Side Bending IP68 LED Neon Flex


Other Accessories

Female & Male Connector




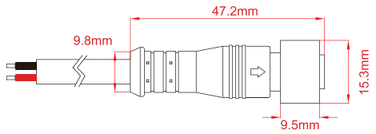


Female connector wire
SYZ-M12-M-2C-075-W

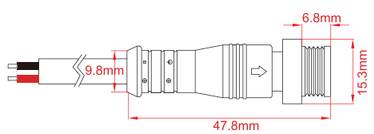


Male connector wire
SYZ-M12-F-2C-075-W





Middle power connector
MID-CNR-A-1T2



Mean Well Transformer
Non-waterproof Series





Mean Well Transformer
Waterproof Series



Female & male wire connector
KJ-M12-2P-F/ KJ-M12-2P-M


Mounting Channel

Model	Description	Dimension	Drawing
ALC0817S02	Model: ALC0817S02 Description: Use for: NF-0817S Length option: 1m,2m,35mm Material: Aluminum alloy Optional color:AS/AB/PW Type: Anti-drop for upside down installation		








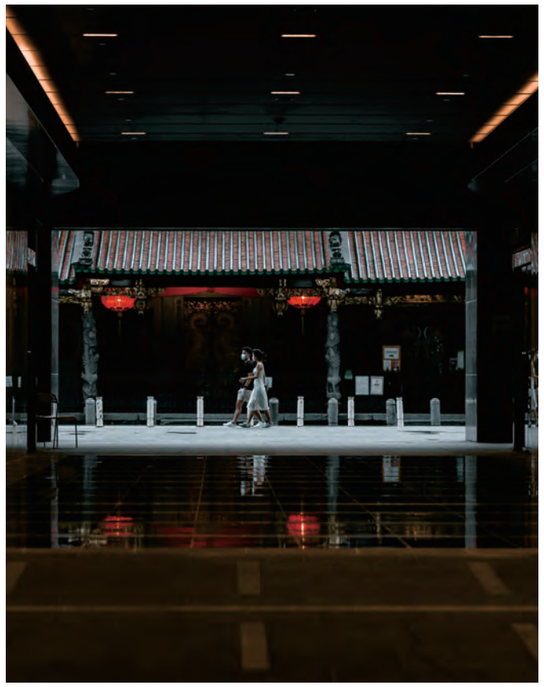

Application

Suitable for indoor and outdoor decorative lighting, architectural outline lighting, cove lighting, sign and advertising lighting.

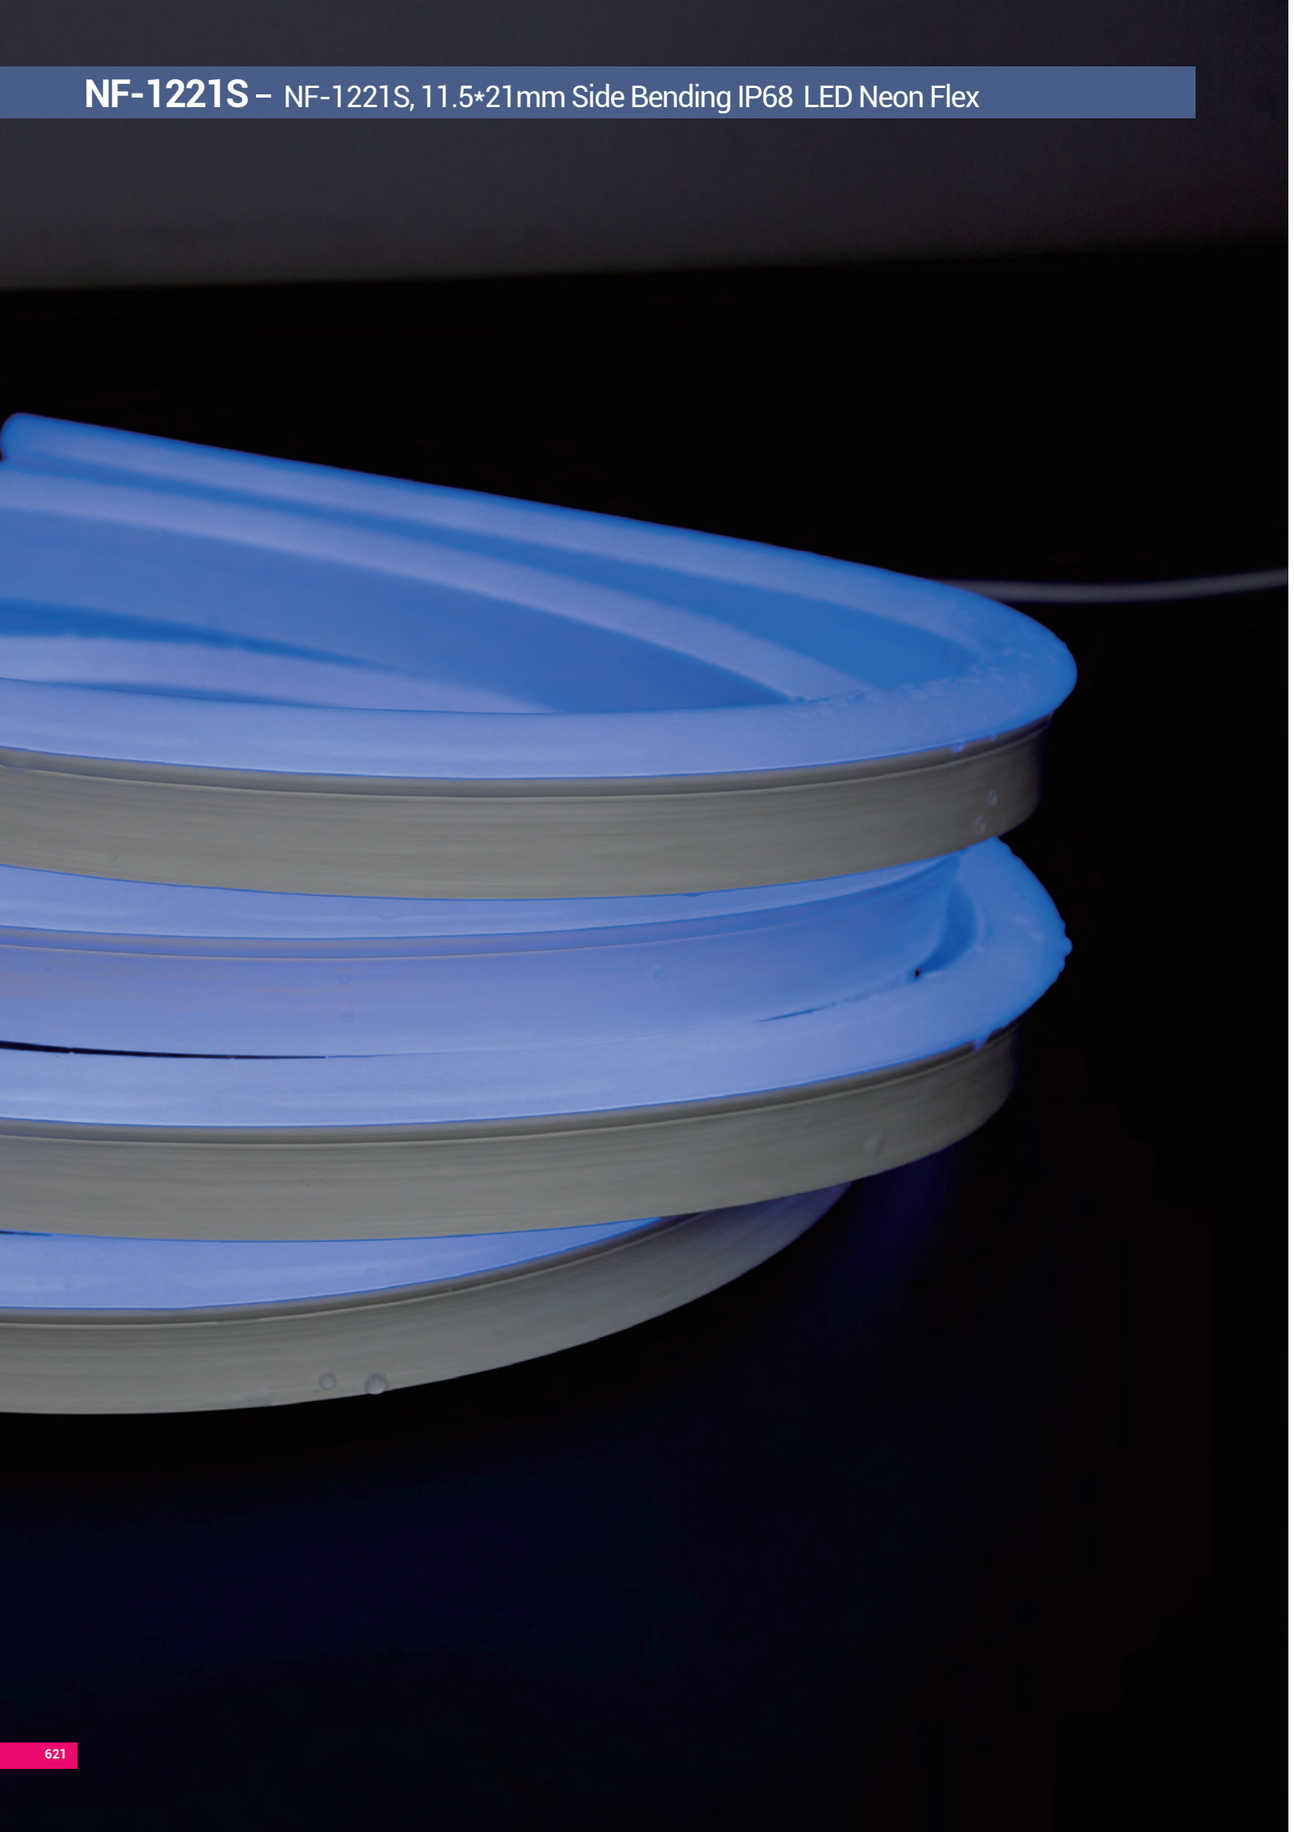

NF-1221S – NF-1221S, 11.5*21mm Side Bending IP68 LED Neon Flex

NF-1221S

- Flat surface with 120 degree beam angle
- Side bending with uniform and even light output
- High lumen output, up to 390lm/M
- Full silicone extrusion with IP68 level and high reliability with UV and yellowish resistant, even if used for a long time outdoor
- Max. run up to 30M application, at double feed, no brightness drop
- L70B50@50,000 hours



IP68 Class III IK08 RoHS CE Dirt Resistant Corrosion Resistant UV Protected Saltwater Resistant

NF1221S-24-060-7.2W

Technical Specification				
Model	NF-1221S-24-072-13W	NF-1221S-24-060-12W	NF-1221S-24-060-7.2W	NF-1221S-24-072-5W
Operating voltage	DC24	DC24	DC24	DC24
Power consumption	13W/M	12W/M	7.2W/M	5W/M
Working Mode	CV	CV	CV	CV
LED type	SMD5050	SMD5050	SMD5050	SMD3528
CRI	Ra>90	Ra>90	Ra>90	Ra>90
Section Size	11.5*21mm	11.5*21mm	11.5*21mm	11.5*21mm
LED Quantity	72pcs/M	60pcs/mM	60pcs/M	72pcs/M
Available CCT	2200K/2700K/3000K/3500K/4000K/5000K		/	2200K/2700K/3000K/3500K /4000K/5000K
Available Color	G/B/LY/P	G/B/LY/P	R/A/O	R/G/B/P/A/O
Min. cutting Unit	6 LEDS	6 LEDS	10 LEDS	12 LEDS
Min. cutting length	83.3mm	100mm	166.7mm	166.7mm
Max. length single feed	8M	10M	15M	15M
Max. length double feed	16M	20M	30M	30M
Photo-electric Parameters				
Model	NF-1221S-24-072-13W	NF-1221S-24-060-12W	NF-1221S-24-060-7.2W	NF-1221S-24-072-5W
CCT	LM/M	LM/M	LM/M	LM/M
R	/	/	>110lm	>144lm
G	>230lm	>200lm	/	>80lm
B	>40lm	>35lm	/	>14m
A	/	/	>110lm	>44lm
O	/	/	>90lm	>35lm
P	>180lm	>150lm	/	>60lm
LY	>300lm	>250lm	/	/
2200K	>330lm	>280lm	/	>120lm
2700K	>330lm	>280lm	/	>120lm
3000K	>330lm	>280lm	/	>120lm
3500K	>380lm	>330lm	/	>130lm
4000K	>380lm	>330lm	/	>130lm
5000K	>390lm	>350lm	/	>140lm

Ordering Code


NF-1221S – 24 – 060 – 5W – 2.2K – S – 01 – SM

Primary Model	Input Voltage(V)	LED QTY/M	Typical Wattage(W/m)	Color / Light Color	Connector entry type	Connector direction	Cable connector type
NF-1221S	24 DC24V	060 60pcs 072 72pcs	5W 7.2W 12W 13W	2200K 2.2K 2700K 2.7K 3000K 3K 3500K 3.5K 4000K 4K 5000K 5K Red R Green G Blue B Amber A Orange O Pink P Lemon Yellow LY	Side entry S Direct entry D Bottom entry B	Right 01 Left 02 Double 03	Male connetor cable SM Female connector cable SF Male & female connector cable SMF Bare wire Blank

Tunable, RGB, RGBW, DMX version are also available(To be ordered separately)


NF-1221S – NF-1221S, 11.5*21mm Side Bending IP68 LED Neon Flex

Construction

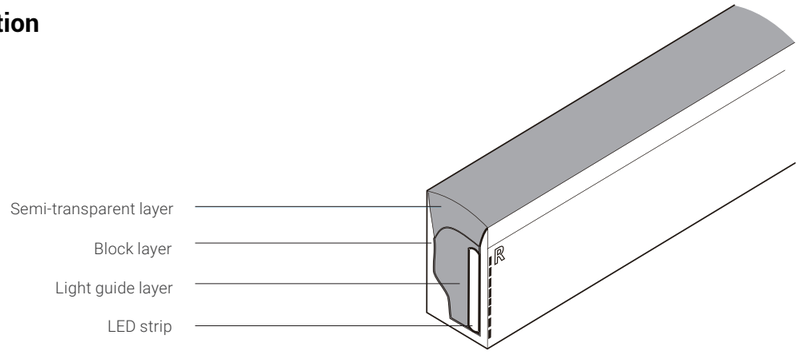


Physical Specification


Light profile

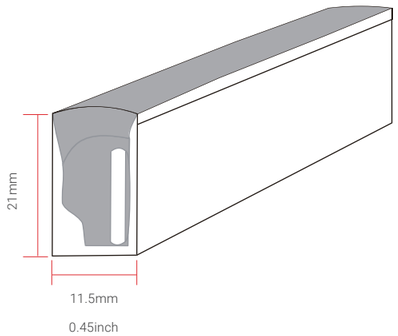


Bending direction

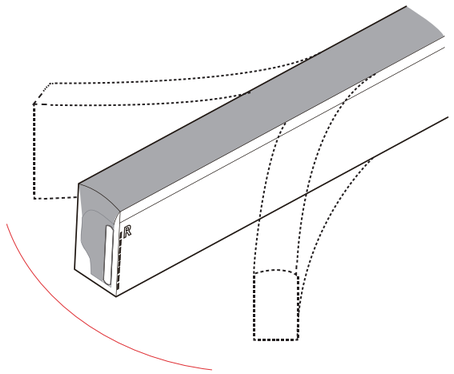


Min. bending diameter

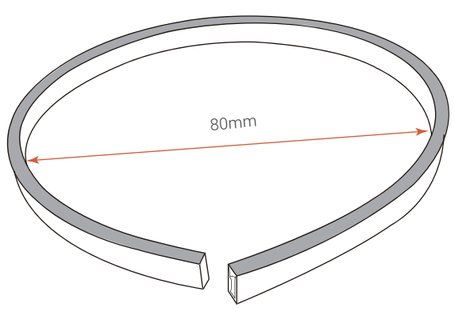

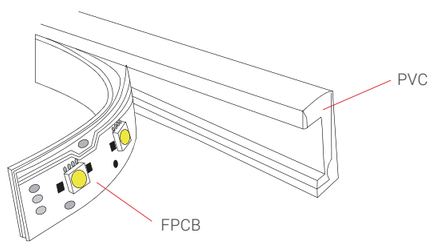


Mould injection connector


(IP68 Factory Assembly only)




Direct entry Connector

① MJ-1221-A-D01
② MJ-1221-A-D01SM
③ MJ-1221-A-D02
④ MJ-1221-A-D02SF
⑤ MJ-1221-A-D03
⑥ MJ-1221-A-D03SMF




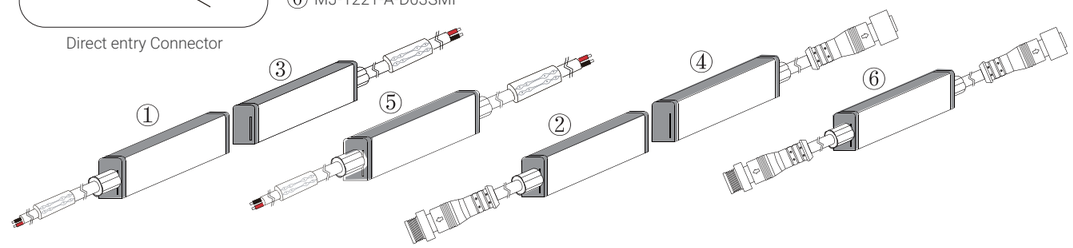





Side entry Connector

① MJ-1221-A-S01
② MJ-1221-A-S01SM
③ MJ-1221-A-S02
④ MJ-1221-A-S02SF
⑤ MJ-1221-A-S03
⑥ MJ-1221-A-S03SMF

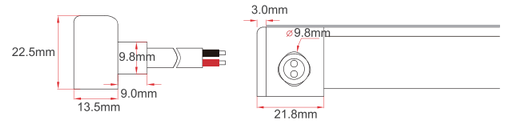


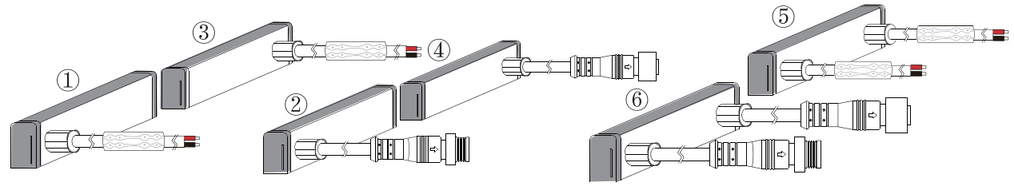




Bottom entry Connector

① MJ-1221-A-B01
② MJ-1221-A-B01SM
③ MJ-1221-A-B02
④ MJ-1221-A-B02SF
⑤ MJ-1221-A-B03
⑥ MJ-1221-A-B03SMF

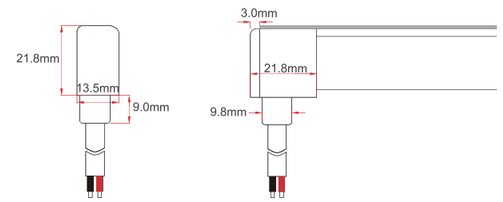


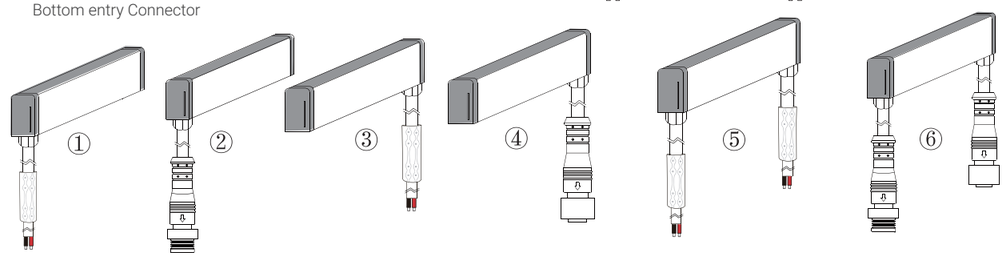

DIY Screw & Snap Connector Kit

Mould injection Jumper


(IP68 Factory Assembly only)

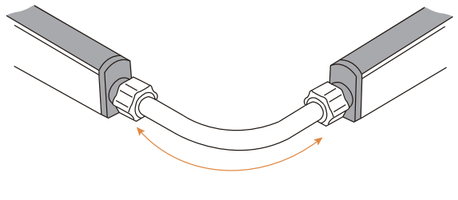


0.3m cable length

Mould injection Jumper

(IP68 Factory Assembly only)







(IP67 Only)

DIY snap splice connector

DIY screw splice connector kit

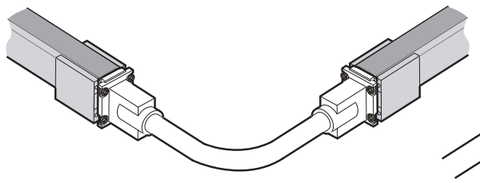


DIY screw connector & End cap kit

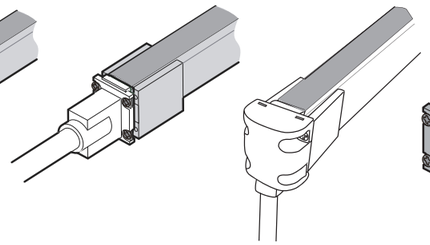


(IP67 Only)

DIY screw splice connector kit

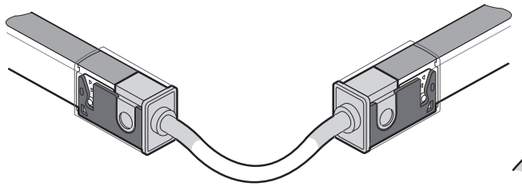


DIY screw connector & End cap kit



DIY snap front connector

(IP67 Only)



DIY snap end cap

Type

Middle injection Connector
DIY snap splice connector
DIY screw connector kit Jumper
DIY screw front connector
DIY screw end cap kit
DIY snap front connector
DIY screw end cap kit

Model


MJ-1221-A-M01-06
DIY-SC-Middle-1221/1228
DIY-SC-EXT-1221/1228-D-A
DIY-SC-FR-1221/1228-D-01-A (Right)
DIY-SC-FR-1221/1228-D-02-A (Left)
DIY-SC-FR-1221/1228-B-01-A (Right)
DIY-SC-FR-1221/1228-B-02-A (Left)
DIY-SC-END-1221/1228

DIY-SN-FR-1221/1228-D-01-A (Right)
DIY-SN-FR-1221/1228-D-02-A (Left)
DIY-SN-END-1221/1228-01 (Right)
DIY-SN-END-1221/1228-02 (Left)


Other Accessories

Female & Male Connector



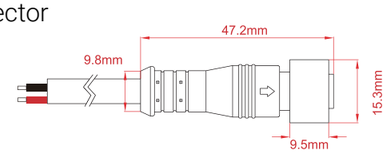


Female connector wire
SYZ-M12-M-2C-075-W

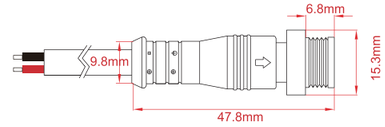


Male connector wire
SYZ-M12-F-2C-075-W







Middle power connector
MID-CNR-A-1T2



LED Neon Cutter
ACC-TOOL-C1




Wire stripper
ACC-TOOL-WS01



Screwdriver
ACC-TOOL-C2




Mean Well Transformer
Non-waterproof Series




Mean Well Transformer
Waterproof Series




Female & male wire connector
KJ-M12-2P-F/ KJ-M12-2P-M



Silicone Rubber
K-5905




PVC End Cap
DIY-PVC-END-1221



Assistant Tool A
CC-TOOL-C3

NF-1228S – 11.5*28mm Side Bending IP68 LED Neon Flex

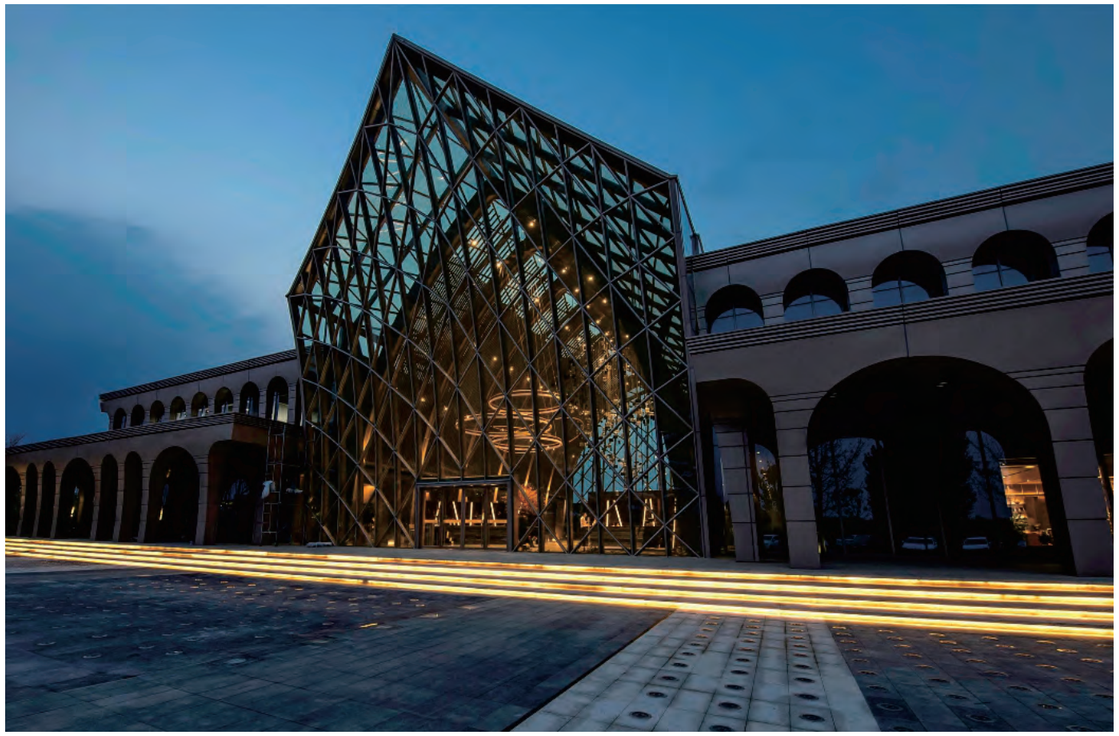



NF-1228S

- Flat surface with 270 degree beam angle
- Side bending with uniform and even light output
- High lumen output, up to 350lm/M
- Full silicone extrusion with IP68 level and high reliability with UV and yellowish resistant, even if used for a long time outdoor
- Max. run up to 30M application, at double feed, no brightness drop
- L70B50@50,000 hours



IP68 Class III IK08 RoHS CE Dirt Resistant Corrosion Resistant UV Protected Saltwater Resistant

Technical Specification				
Model	NF-1228S-24-072-13W	NF-1228S-24-060-12W	NF-1228S-24-060-7.2W	NF-1228S-24-072-5W
Operating voltage	DC24	DC24	DC24	DC24
Power consumption	13W/M	12W/M	7.2W/M	5W/M
Working Mode	CV	CV	CV	CV
LED type	SMD5050	SMD5050	SMD5050	SMD3528
CRI	Ra>90	Ra>90	Ra>90	Ra>90
Section Size	11.5*28mm	11.5*28mm	11.5*28mm	11.5*28mm
LED Quantity	72pcs/M	60pcs/M	60pcs/M	72pcs/M
Available CCT	2200K/2700K/3000K/3500K/4000K/5000K		/	
Available Color	G/B/LY/P	G/B/LY/P	R/A/O	R/G/B/P/A/O
Min. cutting Unit	6 LEDS	6 LEDS	10 LEDS	12 LEDS
Min. cutting length	83.3mm	100mm	166.7mm	166.7mm
Max. length single feed	8M	10M	15M	15M
Max. length double feed	16M	20M	30M	30M
Photo-electric Parameters				
Model	NF-1228S-24-072-13W	NF-1228S-24-060-12W	NF-1228S-24-060-7.2W	NF-1228S-24-072-5W
CCT	lm/M	lm/M	lm/M	lm/M
R	/	/	>100lm	>40lm
G	>200lm	>180lm	/	>70lm
B	>35lm	>30lm	/	>13lm
A	/	/	>100lm	>40lm
O	/	/	>80lm	>32lm
P	>160lm	>130lm	/	>55lm
LY	>270lm	>220lm	/	/
2200K	>290lm	>250lm	/	>110lm
2700K	>290lm	>250lm	/	>110lm
3000K	>290lm	>300lm	/	>110lm
3500K	>340lm	>300lm	/	>120lm
4000K	>340lm	>300lm	/	>120lm
5000K	>350lm	>320lm	/	>130lm

Ordering Code


NF-1228S– 24 – 060 – 5W – 2.2K – S – 01 – SM

Primary Model	Input Voltage(V)	LED QTY/M	Typical Wattage(W/m)	Color / Light Color		Connector entry type		Connector direction		Cable connector type	
NF-1228S	24 DC24V	060 60pcs 072 72pcs	5W 7.2W 12W 13W	2200K	2.2K	Side entry	S	Right	01	Male connetor cable	SM
				2700K	2.7K	Direct entry	D	Left	02	Female connector cable	SF
				3000K	3K	Bottom entry	B	Double	03	Male & female connector cable	SMF
				3500K	3.5K					Bare wire	Blank
				4000K	4K						
				5000K	5K						
				Red	R						
				Green	G						
				Blue	B						
				Amber	A						
				Orange	O						
				Pink	P						
				Lemon Yellow	LY						

Tunable, RGB, RGBW, DMX version are also available(To be ordered separately)


NF-1228S – 11.5*28mm Side Bending IP68 LED Neon Flex

Construction

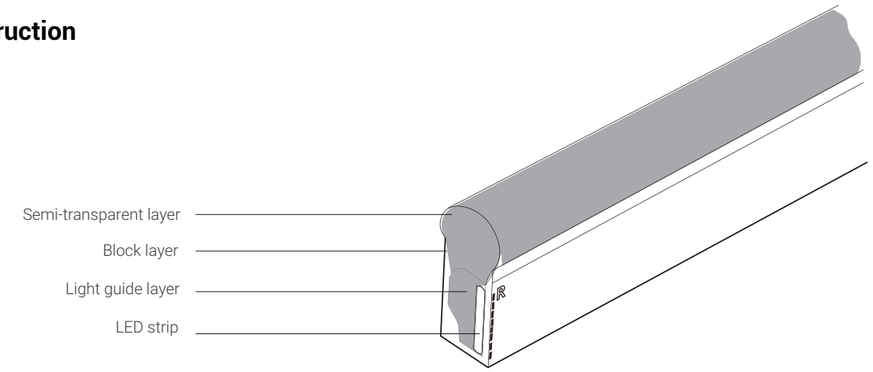


Physical Specification


Light profile

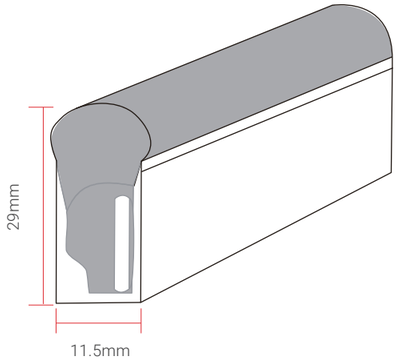


Bending direction

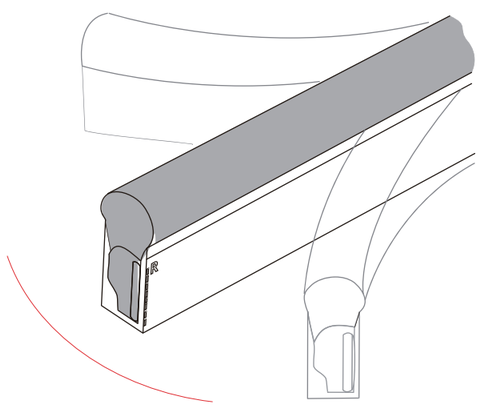


Min. bending diameter

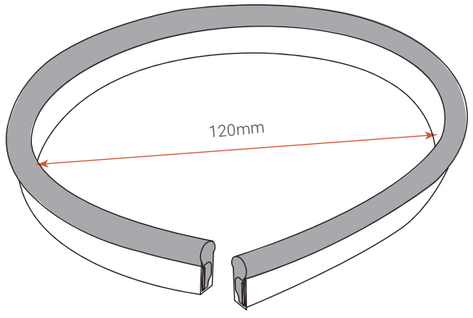

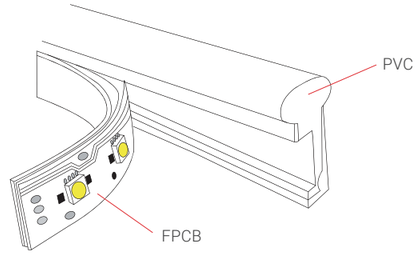


Mould injection connector


(IP68 Factory Assembly only)




Direct entry Connector

① MJ-1228-A-D01
② MJ-1228-A-D01SM
③ MJ-1228-A-D02
④ MJ-1228-A-D02SF
⑤ MJ-1228-A-D03
⑥ MJ-1228-A-D03SMF

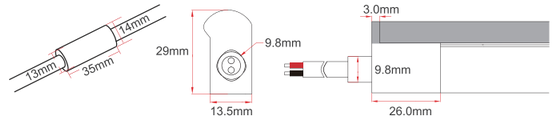


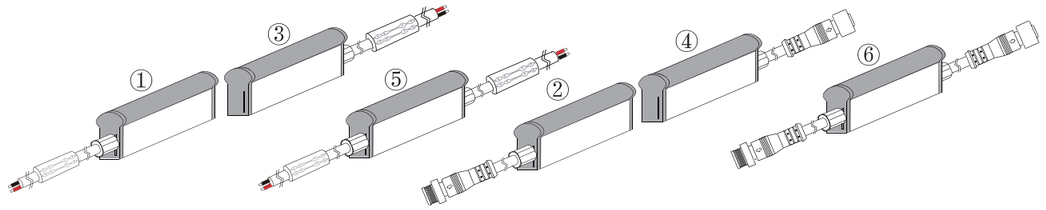





Side entry Connector

① MJ-1228-A-S01
② MJ-1228-A-S01SM
③ MJ-1228-A-S02
④ MJ-1228-A-S02SF
⑤ MJ-1228-A-S03
⑥ MJ-1228-A-S03SMF

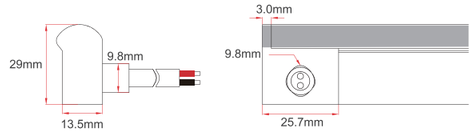


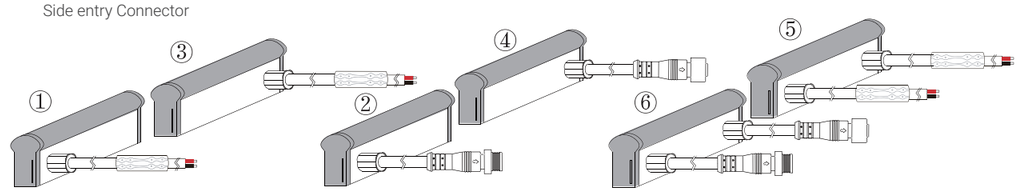




Bottom entry Connector

① MJ-1228-A-B01-06
② MJ-1228-A-B01SM
③ MJ-1228-A-B02
④ MJ-1228-A-B02SF
⑤ MJ-1228-A-B03
⑥ MJ-1228-A-B03SMF

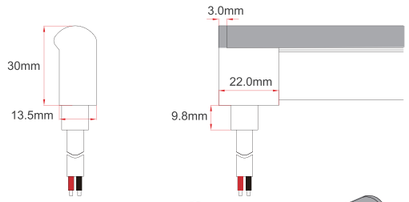


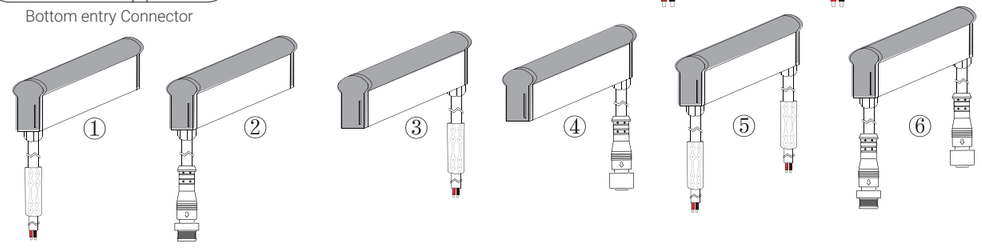

NF-1228S – 11.5*28mm Side Bending IP68 LED Neon Flex


Mould injection Jumper

(IP68 Factory Assembly only)

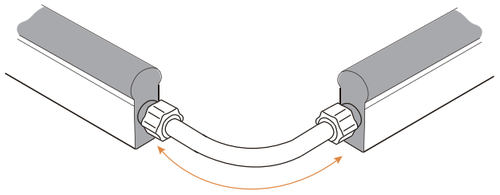


0.3m cable length

DIY snap splice connector
(IP67 Only)




DIY Screw & Snap Connector Kit (IP67 Only)


DIY screw splice connector kit

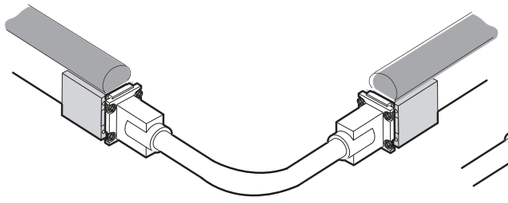

DIY screw connector kit

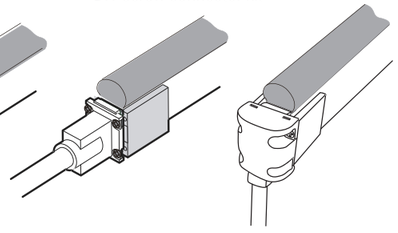


DIY screw front connector




DIY screw end cap


DIY screw splice connector kit

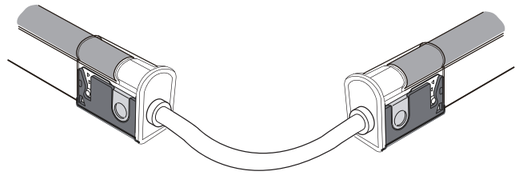

DIY snap connector kit




DIY screw front connector




DIY screw end cap

Type	Model
Middle injection Connector	
DIY snap splice connector	MJ-1228-A-M01-06
DIY screw connector kit Jumper	DIY-SC-Middle-1221/1228
DIY screw front connector	DIY-SC-EXT-1221/1228-D-A
DIY screw end cap kit	DIY-SC-FR-1221/1228-D-01-A (Right)
DIY snap front connector	DIY-SC-FR-1221/1228-D-02-A (Left)
DIY screw end cap kit	DIY-SC-FR-1221/1228-B-01-A (Right)
	DIY-SC-FR-1221/1228-B-02-A (Left)
	DIY-SC-END-1221/1228
	DIY-SN-FR-1221/1228-D-01-A (Right)
	DIY-SN-FR-1221/1228-D-02-A (Left)
	DIY-SN-END-1221/1228-01 (Right)
	DIY-SN-END-1221/1228-02 (Left)



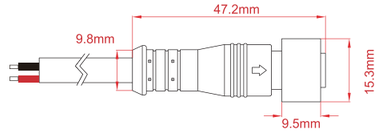


Female connector wire
SYZ-M12-M-2C-075-W

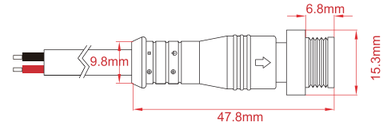


Male connector wire
SYZ-M12-F-2C-075-W







Middle power connector
MID-CNR-A-1T2



LED Neon Cutter
ACC-TOOL-C1




Wire stripper
ACC-TOOL-WS01



Screwdriver
ACC-TOOL-C2




Mean Well Transformer
Non-waterproof Series




Mean Well Transformer
Waterproof Series




Female & male wire connector
KJ-M12-2P-F/ KJ-M12-2P-M



Silicone Rubber
K-5905















Dimmer



Assistant Tool A
CC-TOOL-C3


NF-1221S/ NF-1228S – 11.5*21mm / 11.5*28mm Side Bending IP68 LED Neon Flex

Mounting Profile


Model	Description	Dimension	Drawing
ALC1221/1228S01	Compatibility: NF-1221S & NF-1228S Length option: 1m,2m,35mm Materialr: Aluminum alloy Optional color: AS/AB/PW Typer: Standard		
ALC1221/1228S04	Model: ALC1221/1228S04 Description: Use for: NF-1221S & NF-1228S Length option: 1m,2m,35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Anti-drop for upside down installation		
ALC1221/1228H01	Use for: NF-1221S & NF-1228S Length option: 1m,2m,35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Cable hiding		
ALC1221/1228V01	Use for: NF-1221S & NF-1228S Length option: 1 m,2m,35mm Material: Aluminum alloy Optional color: AS/AB/PW Type: Vertical installation		
SSC1221/1228FLX	Use for: NF-1221S & NF-1228S Length option: 10cm,30cm,50cm, 100cm Material: Stainless steel Optional color: Polished Type: Flexible		
SSC1221/1228S01	Use for: NF-1221S & NF-1228S Length option: 5cm Material: Stainless steel Optional color: Natural color Type: 316 stainless steel		

Dimming system Connection


0-10V dimming system

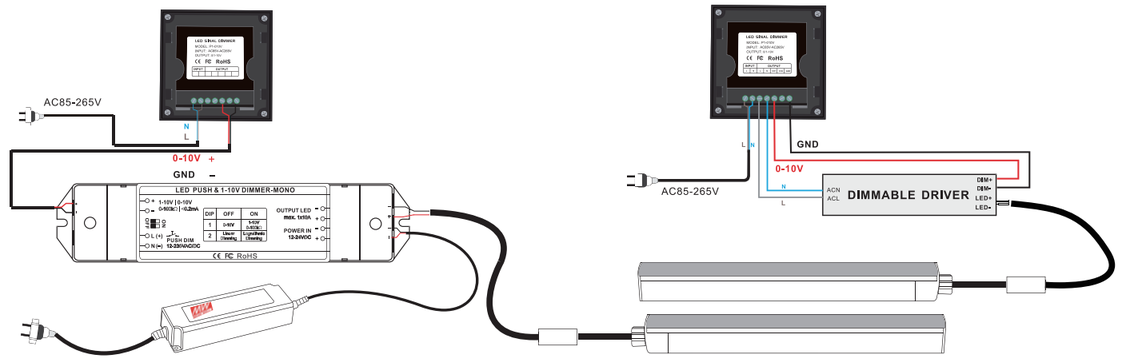

DMX512 dimming system

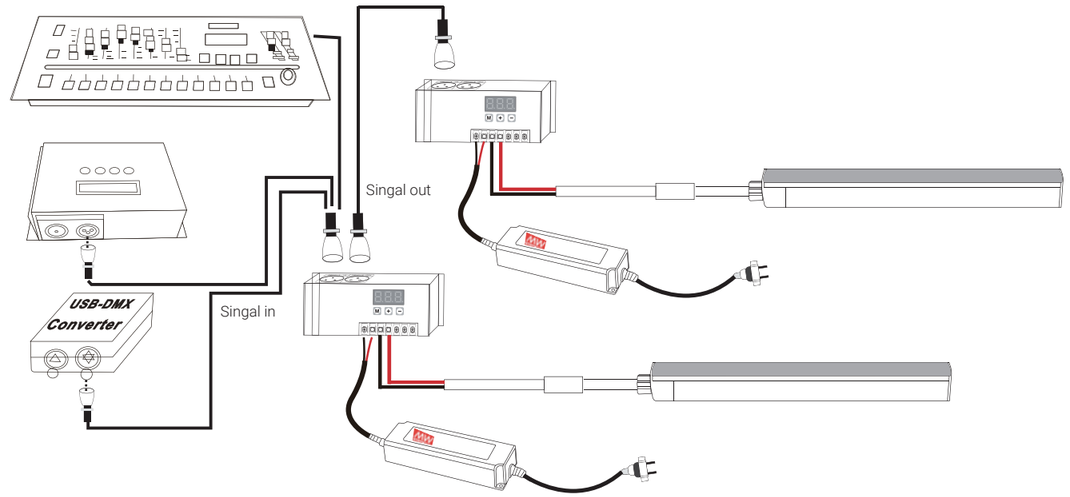

DALI dimming system

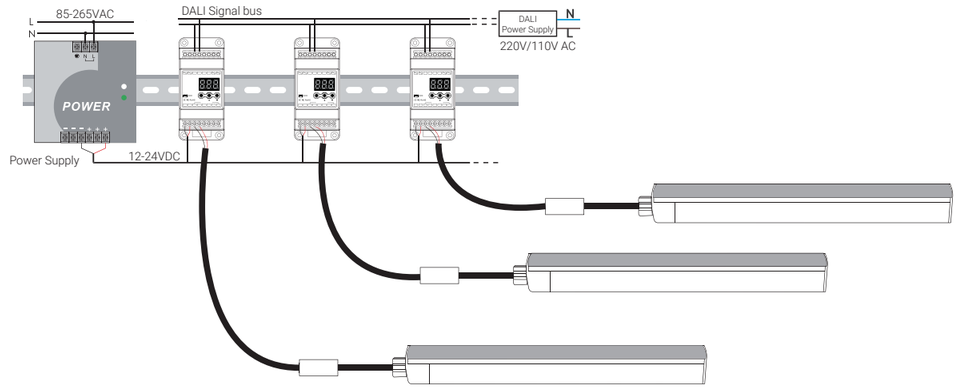


Control NEKO luminaires via CASAMBI

CASAMBI is a versatile Bluetooth-based lighting control solution for commercial, residential, hospitality, office, and retail spaces. Supporting NEKO luminaires, it offers seamless, smart control over lighting networks through an intuitive app, making it ideal for various applications.


Connect NEKO luminaires onto CASAMBI

Here below are the options.

①




NEKO Luminaire




CASAMBI-Ready LED Driver

②



NEKO Luminaire



DALI Dim LED Driver




CASAMBI DALI Dim Module

③



MODULINE 26 Track
+DALI Version Light Inset



48V LED Driver
Any 48V LED Driver



CASAMBI Bluetooth-DALI Converter

CASAMBI Wireless Controls




CASAMBI App




CASAMBI Switch


① DALI Dim, CASAMBI-Ready LED Driver

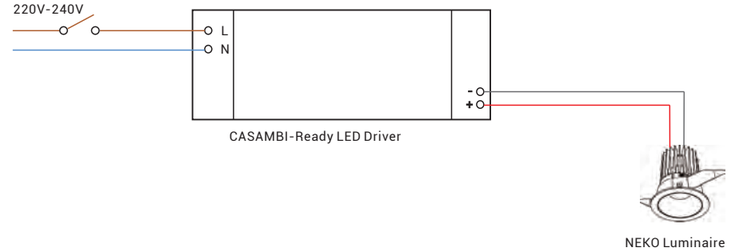

② DALI Dim, CASAMBI DALI Dim Module

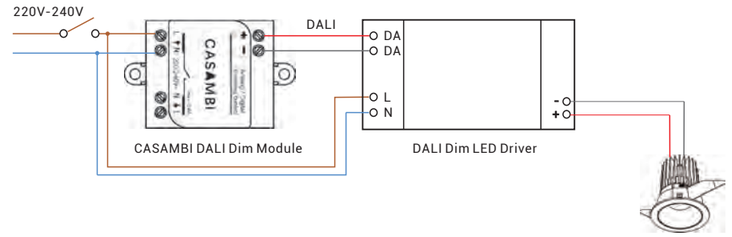


③ CASAMBI DALI Dim Control for NEKO Moduline 26 System

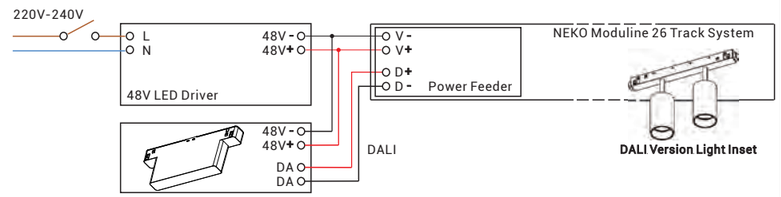


CASAMBI Bluetooth-DALI Converter
Max. 64 DALI Light Insets Divided into 8 Groups
Each Group Can be Controlled Separately
LxH: 143x58mm

Lighting Controls Wiring Diagrams

On-Off/ Non-dim

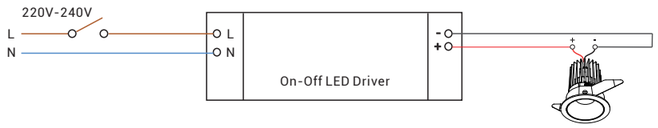


Triac Dim/ Phase Dim

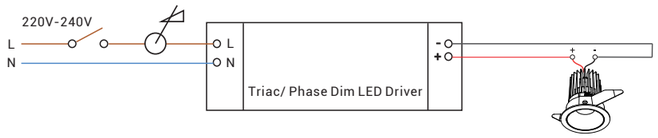


Check the Compatibility of Dimmer and LED Driver

0/1-10V Dim

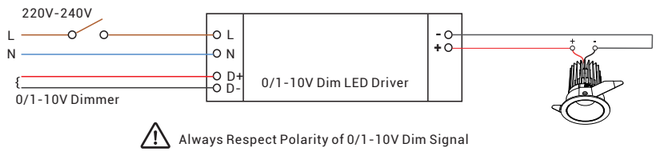


Always Respect Polarity of 0/1-10V Dim Signal

DALI Dim

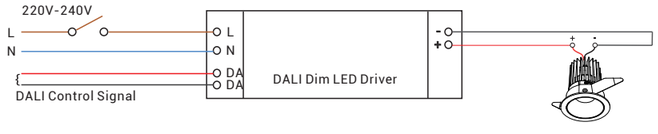


Wiring Diagrams of Moduline 26 Track System

On-Off/ Non-dim

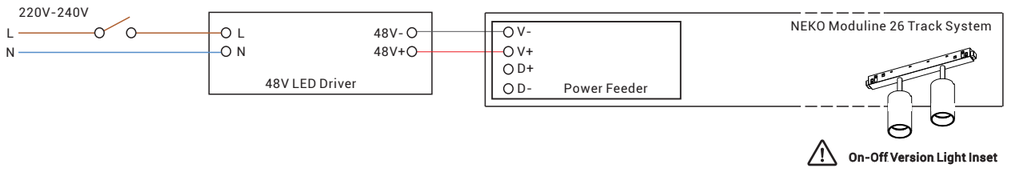

On-Off Version Light Inset


1-10V Dim

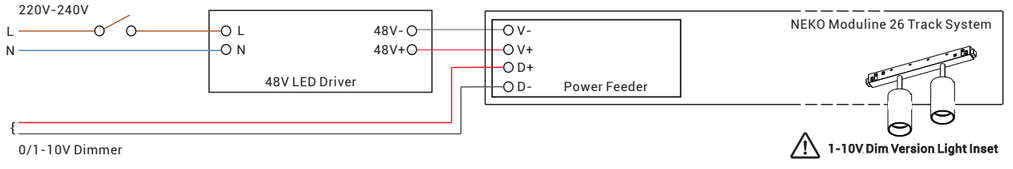

1-10V Dim Version Light Inset


Always Respect Polarity of 0/1-10V Dim Signal

DALI Dim

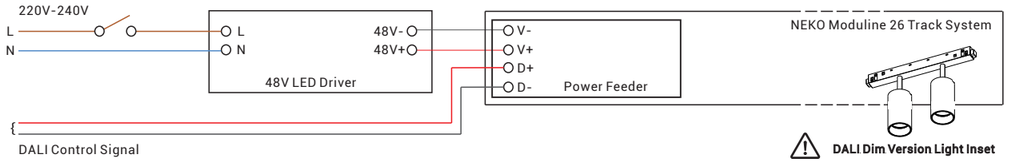

DALI Dim Version Light Inset

CASAMBI DALI Dim Control for NEKO Moduline 26 System

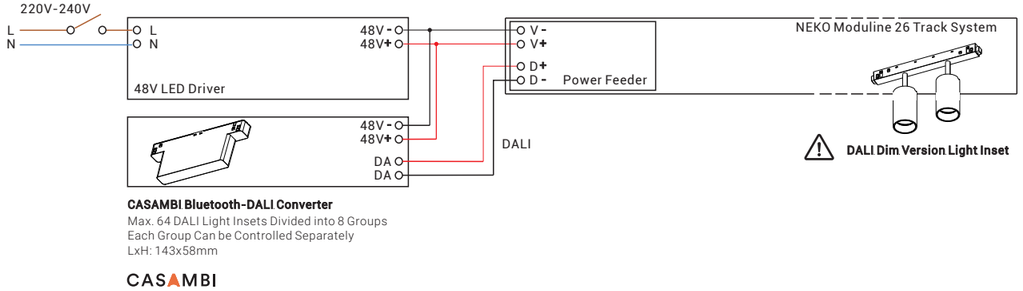

CASAMBI Bluetooth-DALI Converter

Max. 64 DALI Light Insets Divided into 8 Groups
Each Group Can be Controlled Separately
LxH: 143x58mm

CASAMBI

DALI Dim Version Light Inset



OUTDOOR RANGE

LAKEPOINT Series



LAKEPOINT Fixed
■641



LAKEPOINT Adjustable
■642

CARMEL Series



SKYSURFER SSRC
■643



CARMEL Round
■644

RIVA Series




RIVA Round
■645



RIVA Square
■646

CHIC Wall & Ceiling light Series

New



CHIC
■647-649



CAMPSBAY Series



CAMPSBAY Single
■650



CAMPSBAY Double

LAGOON Series



LAGOON
■651

CRUZ D Series



CRUZ D
■652

CAPRI Series



CAPRI
■653

BAY Series



BAY
■654

NICE Series



NICE 250S & NICE 250D
■655



NICE 500S & NICE 500D
■656

St.Tropez Series



St.Tropez
■657

Capetown-Recessed Series



Capetown Round-Recessed
■659



Capetown Square-Recessed

Capetown-Surface Series



Capetown Round-Surface
■660



Capetown Square-Surface


AMALFI Series

New



AMALFI Single
■661-662


POSEIDON Series



POSEIDON S100A
■663-666



POSEIDON S100B



POSEIDON S100C

CALIFORNIA Series



CALIFORNIA 12
■667




CALIFORNIA 16

DURBAN Series



DURBAN
■668

POSITANO Series



POSITANO 300
■669



POSITANO 600

PORTOFINO Series



PORTOFINO Adjustable
■670

AFTER7 Series



AFTER7 Mini
■671



AFTER7 Maxi
■672

NEPTUNE Series



NEPTUNE XSU CV
■673-675



NEPTUNE SU CV
■676

New



NEPTUNE SUBS CV
■677-678



NEPTUNE MU CV
■679

New



NEPTUNE MUBS CV
■680-681



NEPTUNE LUBCV
■682

New



NEPTUNE LUBS CV
■683-784

NEPTUNE SR CV
NEPTUNE SR HV
■685-686

New

NEPTUNE SRBS CV
NEPTUNE SRBS HV
■687-688

NEPTUNE MR CV
NEPTUNE MR HV
■689

New

NEPTUNE MRBS CV
NEPTUNE MRBS HV
■690-691

NEPTUNE LR CV
NEPTUNE LR HV
■692

New

NEPTUNE LRSS CV
NEPTUNE LRSS HV
■693-694

New

NEPTUNE SP
■695-696

New

NEPTUNE MP
■697

New

NEPTUNE LP
■698

TERARACE Series

TERARACE Micro
■699

TERARACE Nano
■700

TERARACE Mini
■701

TERARACE Maxi
■702

TERARACE Dimming Series

New

TERARACE Nano
■703


TERARACE Mini
■704

TERARACE Maxi
■705

TERARACE Maxi
Wall Washer
■706


EXTERIOR LIGHTING

Project: Sorrisniva Arctic Wilderness Lodge, Alta, Norway

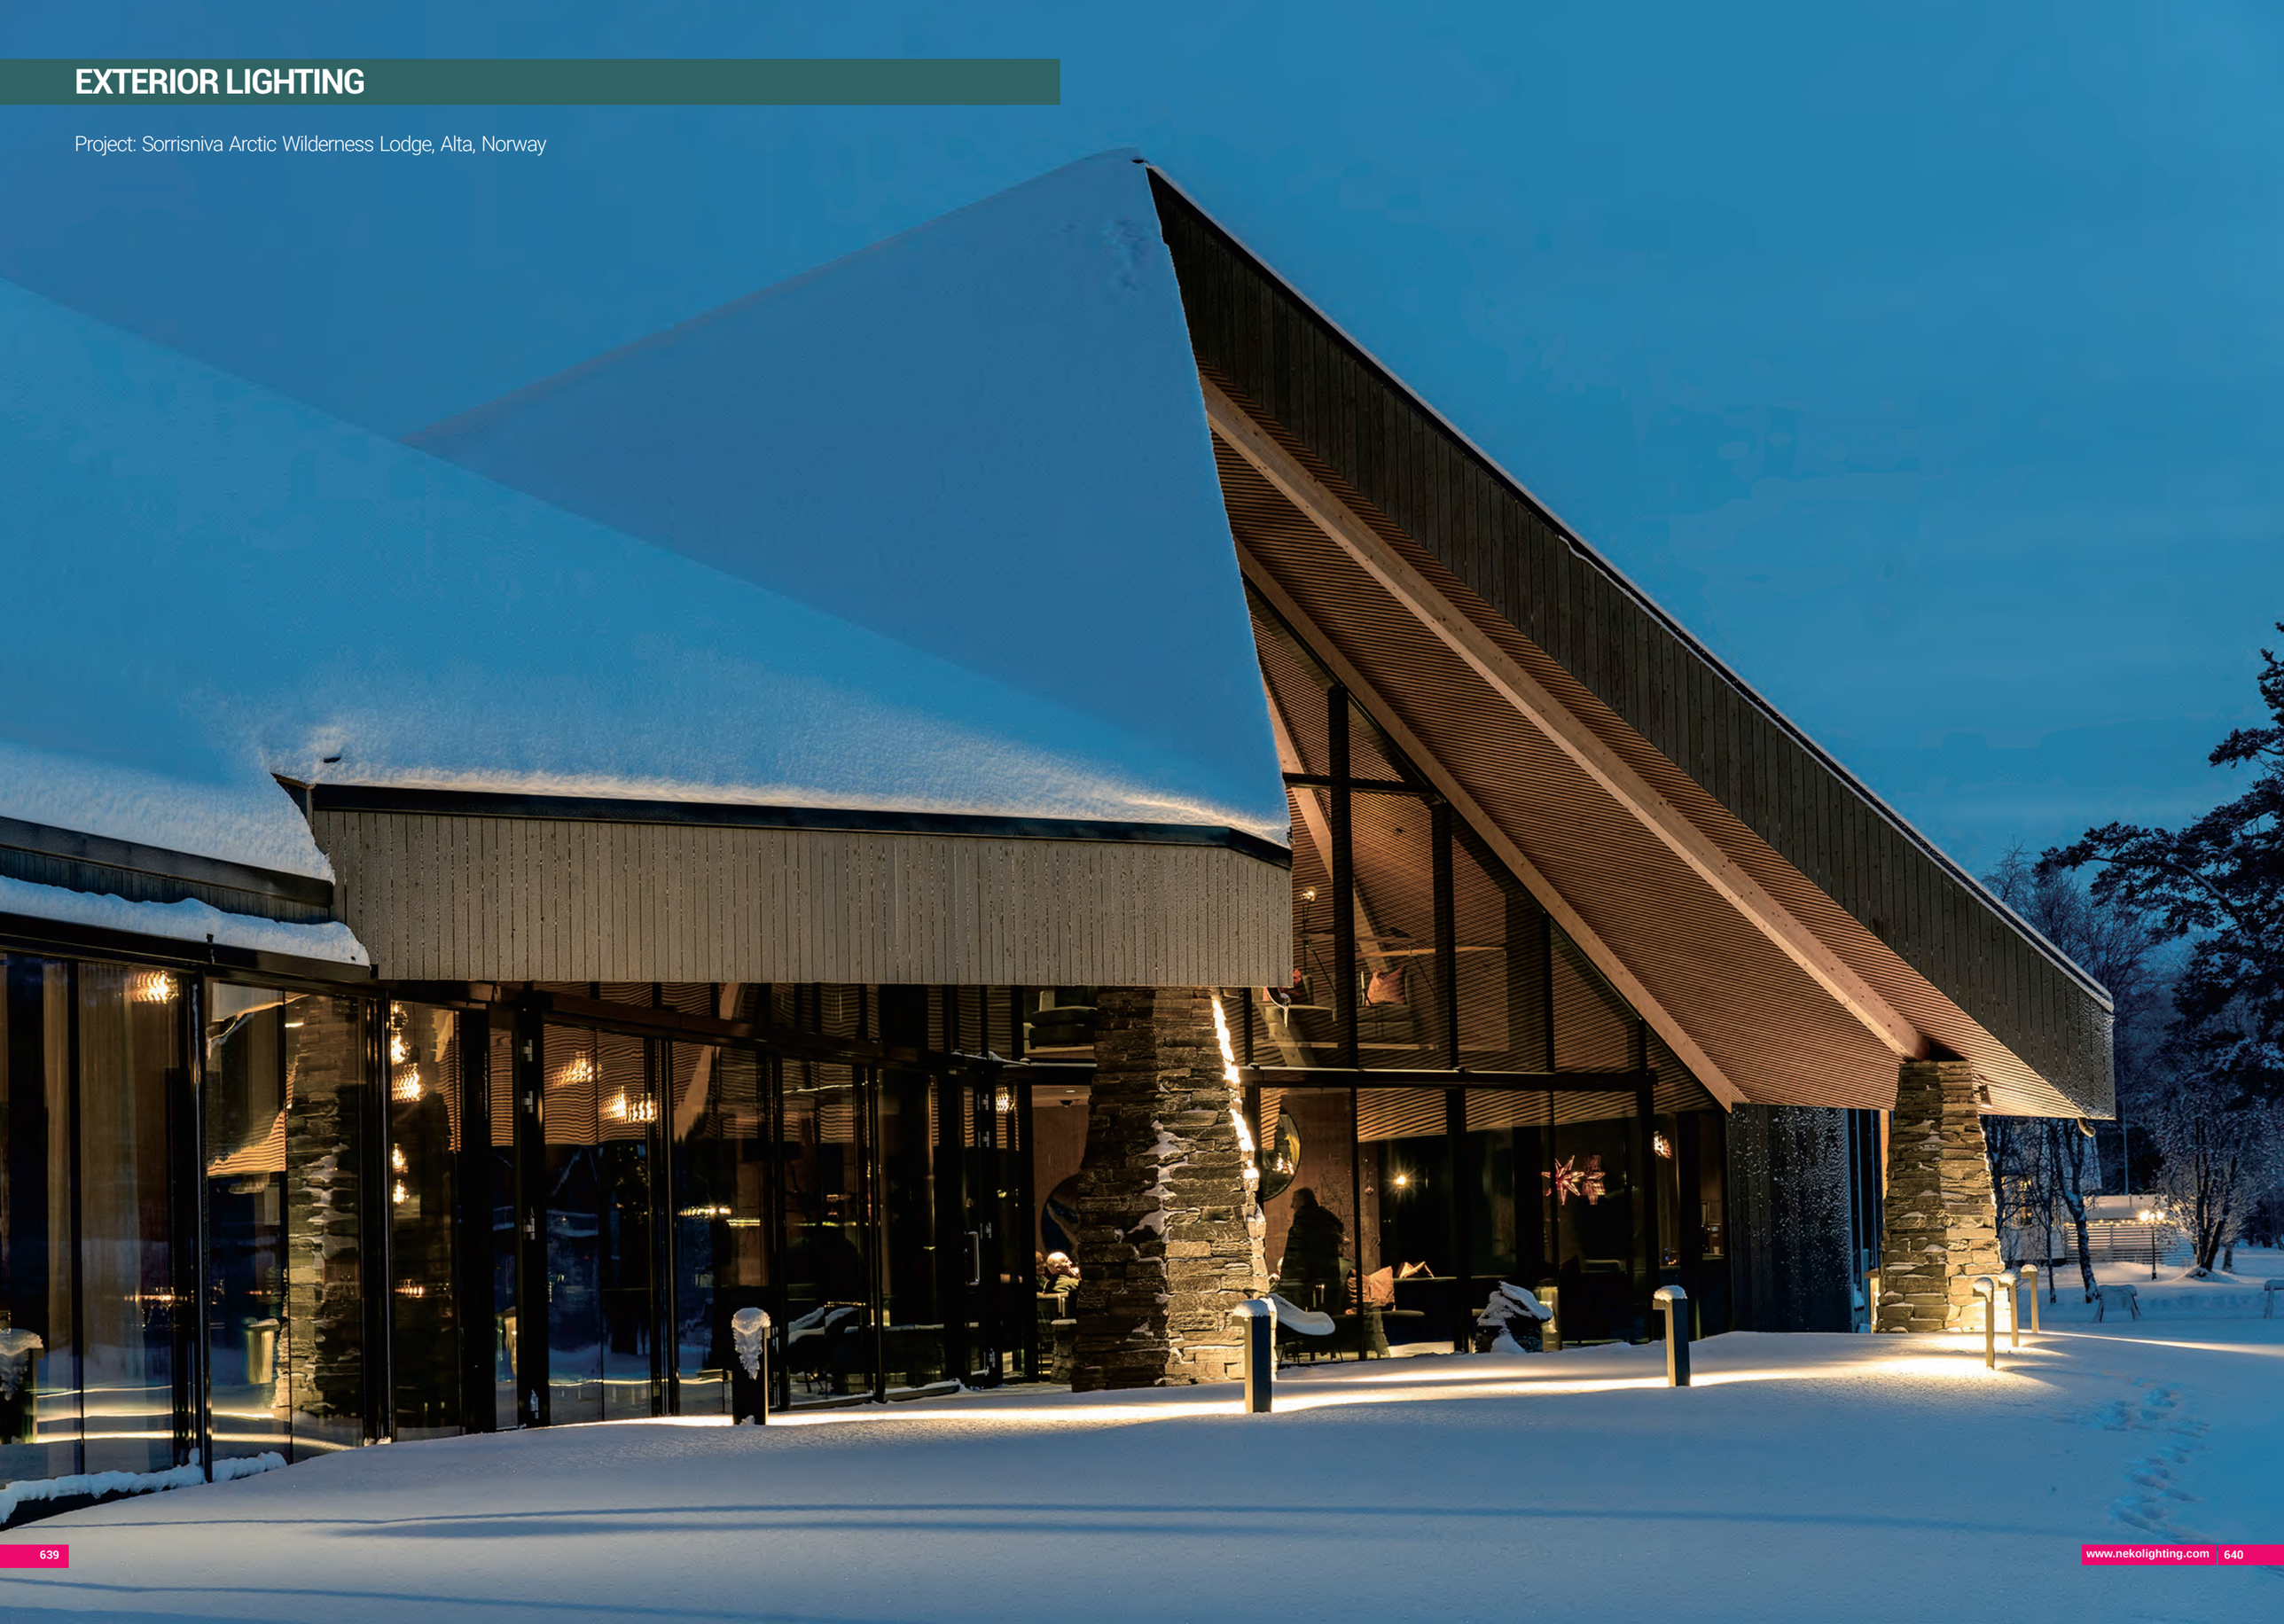

LAKEPOINT Fixed – Exterior LED Downlight



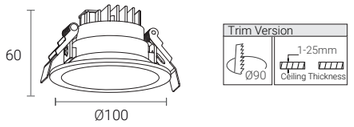


30° | 2700K 3000K | CRI >80 | IP65 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø90mm, 3000K
- CREE LED: 6W, CRI>80
- Beam Angle: 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: White/ Black
- LED Driver: With Non-Dimmable LED driver

Light Distribution

3000K



Finish



White (WW)



Black (BB)


Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6W	8W	220-240VAC	80	3000K	30°	500lm	LAKEPOINT F-830-30°	LAPF-8303008F-WW LAPF-8303008F-BB

Remark: With internal Non-Dimmable LED driver

LAKEPOINT Adjustable – Exterior LED Downlight






30° | 2700K 3000K | CRI >80 | ±30° Tiltable | IP65 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- Ceiling Cut-out: Ø100mm
- CREE LED: 6W, CRI>80, 3000K
- Beam Angle: 30°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: White/ Black
- LED Driver: With Non-Dimmable LED driver

Light Distribution

3000K



Finish



White (WW)



Black (BB)

Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
6W	8W	220-240VAC	80	3000K	30°	500lm	LAKEPOINT A-830-30°	LAPA-8303008F-WW LAPA-8303008F-BB

Remark: With internal Non-Dimmable LED driver


SKYSURFER SSRC – IP65 LED Ceiling Light






Quick Info

- CITIZEN LED: 8W, CRI>90, 3000K
- Beam Angle: 36°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Black, White
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Standard Finish



Black

Optional Finish



White

Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
8W	10W	220-240VAC	90	3000K	36°	850lm	SSRC-10W	SSRC-9303610F-BN
8W	10W	220-240VAC	90	3000K	36°	850lm	SSRC-10W	SSRC-9303610F-WN

Remark: With internal Non-Dimmable LED driver


CARMEL – LED Ceiling Light






Quick Info

- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: 55°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	55°	500lm	CARMEL R-830-55°	CARR-8305506F-DN

Remark: With internal Non-Dimmable LED driver


RIVA ROUND – LED Ceiling Light



110° | 2700K 3000K | CRI >80 | IP65 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMILEDS LED: 12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°	1150lm	RIVR-14W-830-110°	RIVR-830A114F-DN

Remark: With internal Non-Dimmable LED driver


RIVA SQUARE – LED Ceiling Light



110° | 2700K 3000K | CRI >80 | IP65 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- LUMILEDS LED: 12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1150lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°	1150lm	RIVA Square-830-110°	RIVS-830A114F-DN

Remark: With internal Non-Dimmable LED driver

CHIC – Ceiling Light/ Wall Light

New

Stylish wall or ceiling light, IP65 rated
Covers in Alabaster, clear glass or amber glass
Switchable CCT: 2200K-2700K-3000K
Base in black or white



CHIC – Ceiling Light/ Wall Light


New



120° | CRI >90 | IP65 | CE | UKCA | 5 YEARS GUARANTEE


Quick Info

- LED : 3.5W, CRI>90
- CCT Switchable 2200K-2700K-3000K
- Beam Angle: 120°
- Lumen Output: Up to 375lm System Luminous Flux
- IP Class: IP65 (IP54 In Alabaster Cover)
- LED Driver: Phase Dim

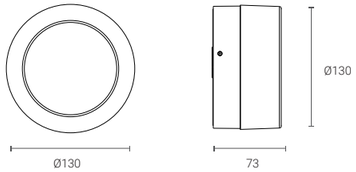

Light Distribution

3000K



Finish



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
3.5W	5W	14V	250mA		@2200K @2700K @3000K	120° 120° 120°	400lm 430lm 460lm	220lm 235lm 245lm	CHIC-9S3A205P-WM
3.5W	5W	14V	250mA		@2200K @2700K @3000K	120° 120° 120°	400lm 430lm 460lm	290lm 300lm 315lm	CHIC-9S3A205P-WA
3.5W	5W	14V	250mA		@2200K @2700K @3000K	120° 120° 120°	430lm 430lm 460lm	340lm 360lm 375lm	CHIC-9S3A205P-WC

Code Remark: P=P(Phase Dim)

Coding

CHIC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
CHIC CHIC-5W	9S3 CRI90/ 2200K-2700K-3000K	A2 120°	05 5W	P Phase Dim	W White B Black	WM White-Alabaster BM Black-Alabaster WA White-Amber BA Black-Amber WC White-Clear BC Black-Clear	

CAMPSBAY – LED Wall Light



CAMPSBAY Single




CAMPSBAY Double

45° | 2700K 3000K | CRI >80 | IP54 | IK07 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 5W, 10W, CRI>80, 3000K
- CCT: 3000K Available as Standard
- Beam Angle: 45°
- Lumen Output: Up to 500lm/ 1000lm System Luminous Flux
- IP Class: IP54
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K

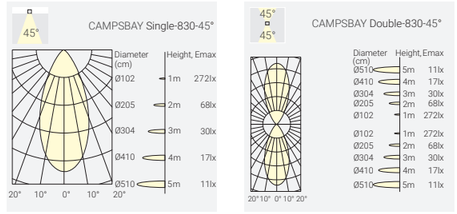

Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	45°	500lm	CAMPSBAY Single-830-45°	CAMS-8304506F-DN
10W	12W	220-240VAC	80	3000K	45° ↓ 45° ↑	1000lm	CAMPSBAY Double-830-45°	CAMD-8304512F-DN

Remark: With internal Non-Dimmable LED driver


LAGOON – LED Wall Light



100° 100° | 2700K 3000K | CRI >80 | IP65 | IK07 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 9W, CRI>80, 3000K
- Beam Angle: 100°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9W	11W	220-240VAC	80	3000K	100° ↓ 100° ↑	950lm	LAGOON-830-110°	LAG-830A111F-DN

Remark: With internal Non-Dimmable LED driver


CRUZ D – LED Wall Light



120° 120° | 2700K 3000K | CRI >80 | IP65 | IK07 | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 12W, CRI>80, 3000K
- Beam Angle: 120°
- Lumen Output: Up to 1400lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	120° ↓ 120° ↑	1400lm	CRUD-830-120°	CRUD-830A214F-DN

Remark: With internal Non-Dimmable LED driver


CAPRI – LED Wall Light



100° 100° | 2700K 3000K | CRI >80 | IP65 | IK07 | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 14W, CRI>80, 3000K
- Beam Angle: 100°
- Lumen Output: Up to 1300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
14W	16W	220-240VAC	80	3000K	100° ↓ 100° ↑	1300lm	CAPRI-830-100°	CAPI-830A016F-DN

Remark: With internal Non-Dimmable LED driver


BAY – LED Wall Light



90° 90° | 2700K 3000K | CRI >80 | IP65 | IK07 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: 90°
- Lumen Output: Up to 430lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	90° ↓ 90° ↑	430lm	BAY-830-90°	BAY-8309006F -DN

Remark: With internal Non-Dimmable LED driver


NICE 250 – LED Wall Light



110° | 2700K 3000K | CRI >80 | IP65 | IK07 | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- LUMILEDS LED: 5W,12W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 650lm / 1300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	7W	220-240VAC	80	3000K	110°↓	650lm	NICE 250S-830-110°	N25S-830A107F-DN
12W	14W	220-240VAC	80	3000K	110°↓ 110°↑	1300lm	NICE 250D-830-110°	N25D-830A114F-DN

Remark: With internal Non-Dimmable LED driver


NICE 500 – LED Wall Light



110° | 2700K 3000K | CRI >80 | IP65 | IK07 | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- LUMILEDS LED: 12W, 18W, CRI>80, 3000K
- Beam Angle: 110°
- Lumen Output: Up to 1300lm/ 1800lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K






Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
12W	14W	220-240VAC	80	3000K	110°↓	1300lm	NICE500S-830-110°	N50S-830A114F-DN
18W	20W	220-240VAC	80	3000K	110°↓ 110°↑	1800lm	NICE500D-830-110°	N50D-830A120F-DN

Remark: With internal Non-Dimmable LED driver


St.Tropez – Window Light



3° | 2700K 3000K | CRI >80 | IP65 | IK10 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 4W, CRI>80, 3000K
- Beam Angle: 3°
- Lumen Output: Up to 300lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	3000K	3°	300lm	St.Tropez-830-3°	STTZ-8300306F-DN

Remark: With internal Non-Dimmable LED driver







Ceiling / windows frame mounted light
Ideally lighting up the frame of doors, windows, corridors, etc
With its self-balancing system making the un-even surface a proper lighting effect

CAPETOWN – Recessed LED Step Light



Capetown Round-Recessed





Capetown Square-Recessed

65° | 2700K 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 155lm/ 165lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey, White(Square Only)
- LED Driver: With internal Non-Dimmable LED driver






Light Distribution

3000K





Order Info

LED Power	System Power	Input	Cutout	CRI	CCT	Beam	System Output	Model	Code
3W	4.5W	220-240VAC	Ø110*55	80	3000K	65°	155lm	Capetown RR-830-65°	CTRR-8306505F-DN
3W	4.5W	220-240VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°	CTSR-8306505F-DN
3W	4.5W	220-240VAC	110*110*55	80	3000K	65°	165lm	Capetown SR-830-65°	CTSR-8306505F-WN

Remark: With internal Non-Dimmable LED driver

Standard Finish



Dark- grey

Optional Finish



White

CAPETOWN – Surface LED Step Light



Capetown Round-Surface





Capetown Square-Surface

65° | 2700K 3000K | CRI >80 | IP65 | IK07 | CE | EDISON 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- EDISON LED: 3W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 150lm/ 170lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey, White(Square Only)
- LED Driver: With internal Non-Dimmable LED driver






Light Distribution

3000K





Standard Finish



Dark- grey

Optional Finish



White

Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
3W	4.5W	220-240VAC	80	3000K	65°	150lm	Capetown RS-830-65°	CTRS-8306505F-DN
3W	4.5W	220-240VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-DN
3W	4.5W	220-240VAC	80	3000K	65°	170lm	Capetown SS-830-65°	CTSS-8306505F-WN

Remark: With internal Non-Dimmable LED driver

AMALFI Series – LED Bollard Lamp

New

Features

- 355° rotation
- IP65 waterproof rating
- Wide light distribution of 140°, achieved through a special optical design
- On/Off or DALI dimming available

AMALFI – LED Bollard Lamp

New




Amalfi Single




Quick Info

- CREE LED: 4W, CRI>80, 3000K
- Beam Angle: Light Emission 140°
- Lumen Output: Up to 200lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: On-Off, DALI Dim



Light Distribution

3000K



Order Info

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	System Output	Model	Code
4W	5W	36V	100mA	80	3000K	140°	200lm	AMFS-5W	AMFS-830A405F-DN
4W	5W	36V	100mA	80	3000K	140°	200lm	AMFS-5W	AMFS-830A405D-DN

Remark: F=(ON-OFF) D=(DALI Dim)

POSEIDON Series – IP66 Garden Light

Features

- Modular designed pathway light with IP66 waterproof rating, perfect for outdoor use
- Twist & Lock covers are interchangeable, styles can be custom made
- Press button for CCT changeable, warm 2700K(2200K Optional) or cozy 3000K
- Extension poles are available with shrubbery growing
- Multiple installation accessories; Pole, Spike or base mounting
- Triple layer coating, ensuring over 1000hours of salt mist test, suitable for seaside installations
- Wider light distribution 130° achieved by advanced lens design
- Invisible screws for esthetic appeal
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Side wiring and rear wiring are available

- The top cover is designed to prevent loss, requiring a downward press to unlock, similar to the safety cap mechanism.



- Interchangeable Covers




- Press Button for 2CCT Changeable






- 2700K-3000K Changeable





Cover

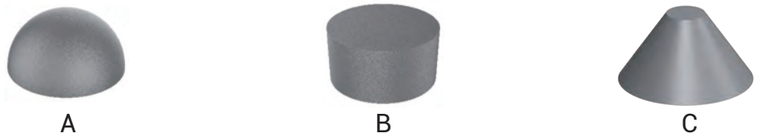


Light Engine



Mounting Type








360° | 2700K 3000K | CRI >80 | IP66 | IK07 | CE | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 4W, 5W, CRI>80, 2700K-3000K CCTs Changeable(A3), 2200K-3000K CCTs Changeable(A2,Optional)
- Beam Angle: Light Emission 360°
- Lumen Output: Up to 370lm/ 485lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input

Light Distribution

3000K





Accessory



K1
Spike with Pedal

K2
Pole Spike



K3
Base



K4
Spike (Rear Wiring)

K5
Pole Spike (Rear Wiring)



K6
Base(Rear Wiring)

EP300
Extension Pole

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	System Output	Model	Code
4W	5W	24VDC	80	@2700K	350lm	POSEIDON-S100A-CV	PAV1-8A3C605N-DN-K1
				@3000K	370lm		
				@2700K	350lm	POSEIDON-S100B-CV	PBV1-8A3C605N-DN-K1
				@3000K	370lm		
				@2700K	350lm	POSEIDON-S100C-CV	PCV1-8A3C605N-DN-K1
				@3000K	370lm		

Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	System Output	Model	Code
5W	7W	220-240VAC	80	@2700K	460lm	POSEIDON-S100A-HV	PAH1-8A3C607F-DN-K1
				@3000K	485lm		
				@2700K	460lm	POSEIDON-S100B-HV	PBH1-8A3C607F-DN-K1
				@3000K	485lm		
				@2700K	460lm	POSEIDON-S100C-HV	PCH1-8A3C607F-DN-K1
				@3000K	485lm		

Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)




CALIFORNIA – LED Bollard Lamp



360° | 2700K 3000K | CRI >80 | IP65 | IK10 | CE | 5 YEARS GUARANTEE

Quick Info


- LED: 11W, 17W, CRI>80, 3000K
- Beam Angle: Light Emission 360°
- Lumen Output: Up to 660lm/ 1100lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: On-Off, DALI Dim




Light Distribution

3000K

CALIFORNIA 12 -13W-830-360°



CALIFORNIA 16-19W-830-360°



Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
11W	13W	220-240VAC	80	3000K	360°	660lm	CALIFORNIA 12-830	CA12-830C613F-DN
17W	19W	220-240VAC	80	3000K	360°	1100lm	CALIFORNIA 16-830	CA16-830C619F-DN
11W	13W	220-240VAC	80	3000K	360°	660lm	CALIFORNIA 12-830	CA12-830C613D-DN
17W	19W	220-240VAC	80	3000K	360°	1100lm	CALIFORNIA 16-830	CA16-830C619D-DN

Remark: F=(ON-OFF) D=(DALI Dim)


DURBAN – LED Bollard Lamp



270° | 2700K 3000K | CRI >80 | IP65 | IK10 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info


- CREE LED: 5W, CRI>80, 3000K
- Beam Angle: Light Emission 270°
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey



Light Distribution

3000K


DURBAN-6W-830-270°




Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	6W	220-240VAC	80	3000K	270°	450lm	DURBAN-830	DURB-830B706F-DN

Remark: With internal Non-Dimmable LED driver



Anchorage installation



Surface installation

POSITANO – LED Bollard Lamp



POSITANO 300




POSITANO 600

50° | 2700K 3000K | CRI >80 | IP65 | CE | LUMILEDS 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- LUMILEDS LED: 5W, CRI>80, 3000K
- Beam Angle: 65°
- Lumen Output: Up to 200lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K





Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
5W	7W	220-240VAC	80	3000K	50°	200lm	POSITANO 300-830	PTO3-8305007F-DN
							POSITANO 600-830	PTO6-8305007F-DN

Remark: With internal Non-Dimmable LED driver


PORTOFINO Adjustable – Beam Angle Zooming Projector Light



15-60° Zooming | 2700K 3000K | CRI >80 | IP65 | IK07 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info


- CREE LED: 9W, CRI>80, 3000K
- Beam Angle: 15°-60° Zooming
- Lumen Output: Up to 450lm System Luminous Flux
- IP Class: IP65
- Body: Aluminum; Color: Dark-Grey
- LED Driver: With internal Non-Dimmable LED driver



Light Distribution

3000K






Order Info

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
9W	11W	220-240VAC	80	3000K	15°-60°	Max.450lm	PORTOFINO A-830-Z	PORA-830ZM11F-DN

Remark: With internal Non-Dimmable LED driver

+60° 15°-

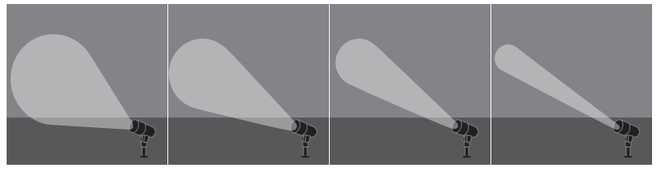

AFTER7 MINI – Projector Light




30° 45° 2700K 3000K CRI >80

IP67 IK08 CE CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)



Light Distribution

3000K





Versions



Without Snoot



With Snoot (H)

Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	AFTER7 Mini-827-30°	AFMI-8273006N-DN
					45°	480lm	AFTER7 Mini-827-45°	AFMI-8274506N-DN
					30°	450lm	AFTER7 Mini-827-30°-H	AFMI-8273006N-DN-H
					45°	450lm	AFTER7 Mini-827-45°-H	AFMI-8274506N-DN-H
				3000K	30°	500lm	AFTER7 Mini-830-30°	AFMI-8303006N-DN
					45°	500lm	AFTER7 Mini-830-45°	AFMI-8304506N-DN
					30°	470lm	AFTER7 Mini-830-30°-H	AFMI-8303006N-DN-H
					45°	470lm	AFTER7 Mini-830-45°-H	AFMI-8304506N-DN-H

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory : Spike for AFTER7 series projectors



AFTER7 MAXI – Projector Light




20° 30° 50° 2700K 3000K CRI >80

IP67 IK08 CE UKCA CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 50°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)




Light Distribution

3000K







Versions



Without Snoot



With Snoot (H)

Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	800lm	AFTER7 Maxi-827-20°	AFMA-8272010N-DN
					30°	800lm	AFTER7 Maxi-827-30°	AFMA-8273010N-DN
					50°	800lm	AFTER7 Maxi-827-50°	AFMA-8275010N-DN
					20°	750lm	AFTER7 Maxi-827-20°-H	AFMA-8272010N-DN
					30°	750lm	AFTER7 Maxi-827-30°-H	AFMA-8273010N-DN
					50°	750lm	AFTER7 Maxi-827-50°-H	AFMA-8275010N-DN
				3000K	20°	850lm	AFTER7 Maxi-830-20°	AFMA-8302010N-DN
					30°	850lm	AFTER7 Maxi-830-30°	AFMA-8303010N-DN
					50°	850lm	AFTER7 Maxi-830-50°	AFMA-8305010N-DN
					20°	800lm	AFTER7 Maxi-830-20°-H	AFMA-8302010N-DN
					30°	800lm	AFTER7 Maxi-830-30°-H	AFMA-8303010N-DN
					50°	800lm	AFTER7 Maxi-830-50°-H	AFMA-8305010N-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

Accessory : Spike for AFTER7 series projectors




NEPTUNE – Projector Light



Metaliron grey with triple layer coating for high corrosion and UV resistance

- Chemical conversion coating on the aluminium surface followed by the first layer of anodising
- The second layer of epoxy paint
- The third polyester powder
- Salt spray test passed over 1000hours

Optional accessory



Honeycomb

Accessory



Spike for NEPTUNE series projectors



NEPTUNE XSU CV



NEPTUNE SU CV



NEPTUNE SUBS CV



NEPTUNE SUSS CV



NEPTUNE MU CV



NEPTUNE MUBS CV



NEPTUNE MUSS CV



NEPTUNE LU CV



NEPTUNE LUBS CV



NEPTUNE LUSS CV

NEPTUNE XSU CV – Projector Light




12° 18° 30° 50° | 2700K 3000K | CRI >80 | UGR<19

IP67 | CE | OSRAM 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- OSRAM LED: 3W, CRI>80, 2700K, 3000K
- Beam Angle: 12°, 18°, 30°, 50°
- Lumen Output: Up to 150lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

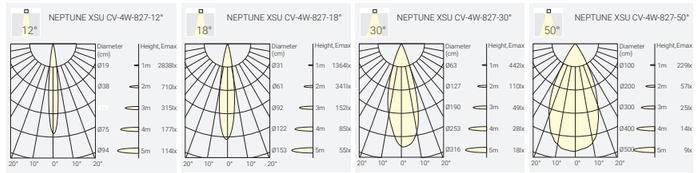

Standard Finish



Dark-Grey

Optional Finish



Rust



Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb



Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
3W	4W	24VDC	80	2700K	12°	140lm	NEPTUNE XSU-4W-827-12°	NU1C-8271204N-DN
					18°	140lm	NEPTUNE XSU-4W-827-18°	NU1C-8271804N-DN
					30°	140lm	NEPTUNE XSU-4W-827-30°	NU1C-8273004N-DN
					50°	140lm	NEPTUNE XSU-4W-827-50°	NU1C-8275004N-DN
				3000K	12°	150lm	NEPTUNE XSU-4W-830-12°	NU1C-8301204N-DN
					18°	150lm	NEPTUNE XSU-4W-830-18°	NU1C-8301804N-DN
					30°	150lm	NEPTUNE XSU-4W-830-30°	NU1C-8303004N-DN
					50°	150lm	NEPTUNE XSU-4W-830-50°	NU1C-8305004N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Coding

NU1C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU1C NEPTUNE XSU CV	**827** CRI>80/ 2700K	**12** 12°	**04** 4W	**N** None	**D** Dark-Grey	**N** None	
	830 CRI>80/ 3000K	**18** 18°			**G** Green		
		30 30°			**R** Rust		
		50 50°					

NEPTUNE SU CV – Projector Light




8° 15° 36° 45° | 2700K 3000K | CRI >80 | UGR<19

IP67 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 8°, 15°, 36°, 45°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

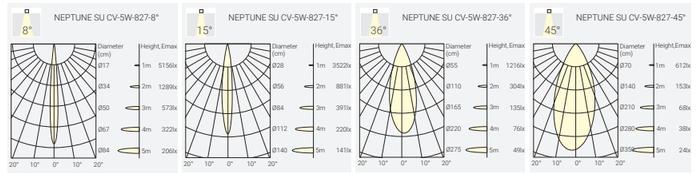

Standard Finish



Dark-Grey

Optional Finish



Rust



Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	8°	260lm	NEPTUNE SU-5W-827-8°	NU2C-8270805N-DN
				3000K	8°	280lm	NEPTUNE SU-5W-830-8°	NU2C-8300805N-DN
4.2W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SU-5W-827-15°	NU2C-8271505N-DN
					36°	380lm	NEPTUNE SU-5W-827-36°	NU2C-8273605N-DN
					45°	300lm	NEPTUNE SU-5W-827-45°	NU2C-8274505N-DN
				3000K	15°	420lm	NEPTUNE SU-5W-830-15°	NU2C-8301505N-DN
					36°	420lm	NEPTUNE SU-5W-830-36°	NU2C-8303605N-DN
					45°	350lm	NEPTUNE SU-5W-830-45°	NU2C-8304505N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Coding

NU2C – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU2C NEPTUNE SU CV	**827** CRI>80/ 2700K	**08** 8°	**05** 5W	**N** None	**D** Dark-Grey	**N** None	
	830 CRI>80/ 3000K	**15** 15°			**G** Green		
		36 36°			**R** Rust		
		45 45°					

NEPTUNE SUBS CV – Projector Light

New




8° 15° 36° 45° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 8°, 15°, 36°, 45°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

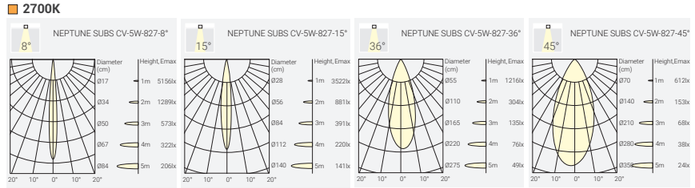

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	8°	260lm	NEPTUNE SUBS-5W-827-8°	NU2BC-8270805N-DN
				3000K	8°	280lm	NEPTUNE SUBS-5W-830-8°	NU2BC-8300805N-DN
4.2W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SUBS-5W-827-15°	NU2BC-8271505N-DN
					36°	380lm	NEPTUNE SUBS-5W-827-36°	NU2BC-8273605N-DN
					45°	300lm	NEPTUNE SUBS-5W-827-45°	NU2BC-8274505N-DN
				3000K	15°	420lm	NEPTUNE SUBS-5W-830-15°	NU2BC-8301505N-DN
					36°	420lm	NEPTUNE SUBS-5W-830-36°	NU2BC-8303605N-DN
					45°	350lm	NEPTUNE SUBS-5W-830-45°	NU2BC-8304505N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Coding

NU2BC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU2BC NEPTUNE SUBS CV	827 CRI>80/ 2700K	08 8°	05 5W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	15 15°			G Green		
		36 36°			R Rust		
		45 45°					

NEPTUNE SUSS CV – Projector Light

New




8° 15° 36° 45° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 8°, 15°, 36°, 45°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

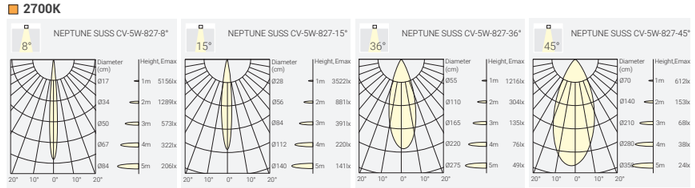

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	8°	260lm	NEPTUNE SUSS-5W-827-8°	NU2SC-8270805N-DN
				3000K	8°	280lm	NEPTUNE SUSS-5W-830-8°	NU2SC-8300805N-DN
4.2W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SUSS-5W-827-15°	NU2SC-8271505N-DN
					36°	380lm	NEPTUNE SUSS-5W-827-36°	NU2SC-8273605N-DN
					45°	300lm	NEPTUNE SUSS-5W-827-45°	NU2SC-8274505N-DN
				3000K	15°	420lm	NEPTUNE SUSS-5W-830-15°	NU2SC-8301505N-DN
					36°	420lm	NEPTUNE SUSS-5W-830-36°	NU2SC-8303605N-DN
					45°	350lm	NEPTUNE SUSS-5W-830-45°	NU2SC-8304505N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Coding

NU2SC – *** ** ** * – * * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU2SC NEPTUNE SUSS CV	827 CRI>80/ 2700K	08 8°	05 5W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	15 15°			G Green		
		36 36°			R Rust		
		45 45°					

NEPTUNE MU CV – Projector Light




10° 24° 36° 55° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 24°, 36°, 55°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

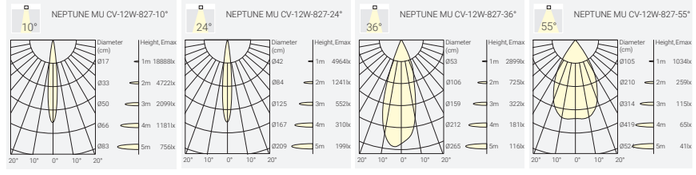

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MU-12W-827-10°	NU3C-8271012N-DN
					24°	850lm	NEPTUNE MU-12W-827-24°	NU3C-8272412N-DN
					36°	850lm	NEPTUNE MU-12W-827-36°	NU3C-8273612N-DN
					55°	800lm	NEPTUNE MU-12W-827-55°	NU3C-8275512N-DN
				3000K	10°	850lm	NEPTUNE MU-12W-830-10°	NU3C-8301012N-DN
					24°	950lm	NEPTUNE MU-12W-830-24°	NU3C-8302412N-DN
					36°	950lm	NEPTUNE MU-12W-830-36°	NU3C-8303612N-DN
					55°	850lm	NEPTUNE MU-12W-830-55°	NU3C-8305512N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Coding

NU3C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU3C NEPTUNE MU CV	827 CRI>80/ 2700K	10 10°	12 12W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	24 24°			G Green		
		36 36°			R Rust		
		55 55°					

NEPTUNE MUBS CV – Projector Light

New




10° 24° 36° 55° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 24°, 36°, 55°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

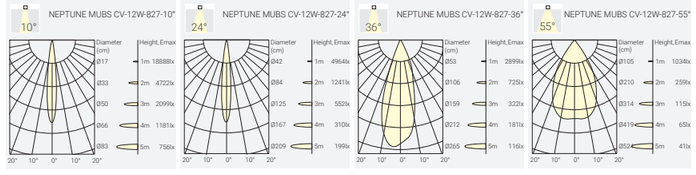

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MUBS-12W-827-10°	NU3BC-8271012N-DN
					24°	850lm	NEPTUNE MUBS-12W-827-24°	NU3BC-8272412N-DN
					36°	850lm	NEPTUNE MUBS-12W-827-36°	NU3BC-8273612N-DN
					55°	800lm	NEPTUNE MUBS-12W-827-55°	NU3BC-8275512N-DN
				3000K	10°	850lm	NEPTUNE MUBS-12W-830-10°	NU3BC-8301012N-DN
					24°	950lm	NEPTUNE MUBB-12W-830-24°	NU3BC-8302412N-DN
					36°	950lm	NEPTUNE MUBS-12W-830-36°	NU3BC-8303612N-DN
					55°	850lm	NEPTUNE MUBS-12W-830-55°	NU3BC-8305512N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Coding

NU3BC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU3BC NEPTUNE MUBS CV	827 CRI>80/ 2700K	10 10°	12 12W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	24 24°			G Green		
		36 36°			R Rust		
		55 55°					

NEPTUNE MUSS CV – Projector Light

New




10° 24° 36° 55° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 24°, 36°, 55°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

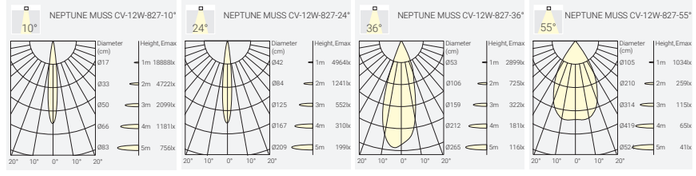

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MUSS-12W-827-10°	NU3SC-8271012N-DN
					24°	850lm	NEPTUNE MUSS-12W-827-24°	NU3SC-8272412N-DN
					36°	850lm	NEPTUNE MUSS-12W-827-36°	NU3SC-8273612N-DN
					55°	800lm	NEPTUNE MUSS-12W-827-55°	NU3SC-8275512N-DN
				3000K	10°	850lm	NEPTUNE MUSS-12W-830-10°	NU3SC-8301012N-DN
					24°	950lm	NEPTUNE MUSS-12W-830-24°	NU3SC-8302412N-DN
					36°	950lm	NEPTUNE MUSS-12W-830-36°	NU3SC-8303612N-DN
					55°	850lm	NEPTUNE MUSS-12W-830-55°	NU3SC-8305512N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Coding

NU3SC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU3SC NEPTUNE MUSS CV	**827** CRI>80/ 2700K	**10** 10°	**12** 12W	**N** None	**D** Dark-Grey	**N** None	
	830 CRI>80/ 3000K	**24** 24°			**G** Green		
		36 36°			**R** Rust		
		55 55°					

NEPTUNE LU CV – Projector Light




12° 18° 36° 55° 2700K 3000K CRI >80 UGR<19

IP67 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 12°, 18°, 36°, 55°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Light Distribution

2700K

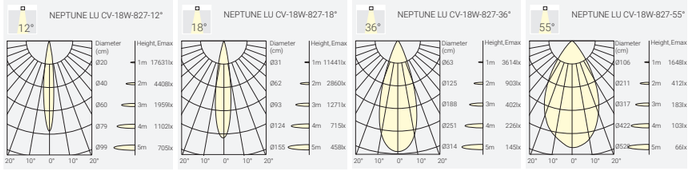

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	12°	1400lm	NEPTUNE LU-18W-827-12°	NU4C-8271218N-DN
					18°	1450lm	NEPTUNE LU-18W-827-18°	NU4C-8271818N-DN
					36°	1450lm	NEPTUNE LU-18W-827-36°	NU4C-8273618N-DN
					55°	1400lm	NEPTUNE LU-18W-827-55°	NU4C-8275518N-DN
				3000K	12°	1500lm	NEPTUNE LU-18W-830-12°	NU4C-8301218N-DN
					18°	1600lm	NEPTUNE LU-18W-830-18°	NU4C-8301818N-DN
					36°	1600lm	NEPTUNE LU-18W-830-36°	NU4C-8303618N-DN
					55°	1500lm	NEPTUNE LU-18W-830-55°	NU4C-8305518N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Coding

NU4C – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU4C NEPTUNE LU CV	**827** CRI>80/ 2700K	**12** 12°	**18** 18W	**N** None	**D** Dark-Grey	**N** None	
	830 CRI>80/ 3000K	**18** 18°			**G** Green		
		36 36°			**R** Rust		
		55 55°					

NEPTUNE LUBS CV – Projector Light


New



12° 18° 36° 55° | 2700K 3000K | CRI >80 | UGR<19 | IP67 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 12°, 18°, 36°, 55°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately



Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors




Optional Accessory



Honeycomb

Light Distribution

2700K

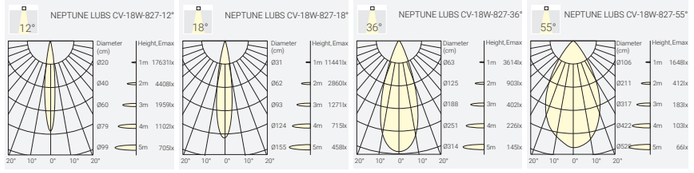

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	12°	1400lm	NEPTUNE LUBS-18W-827-12°	NU4BC-8271218N-DN
					18°	1450lm	NEPTUNE LUBS-18W-827-18°	NU4BC-8271818N-DN
					36°	1450lm	NEPTUNE LUBS-18W-827-36°	NU4BC-8273618N-DN
					55°	1400lm	NEPTUNE LUBS-18W-827-55°	NU4BC-8275518N-DN
				3000K	12°	1500lm	NEPTUNE LUBS-18W-830-12°	NU4BC-8301218N-DN
					18°	1600lm	NEPTUNE LUBS-18W-830-18°	NU4BC-8301818N-DN
					36°	1600lm	NEPTUNE LUBS-18W-830-36°	NU4BC-8303618N-DN
					55°	1500lm	NEPTUNE LUBS-18W-830-55°	NU4BC-8305518N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Coding

NU4BC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU4BC NEPTUNE LUBS CV	827 CRI>80/ 2700K 830 CRI>80/ 3000K	12 12° 18 18° 36 36° 55 55°	18 18W	N None	D Dark-Grey G Green R Rust	N None	

NEPTUNE LUSS CV – Projector Light


New



12° 18° 36° 55° | 2700K 3000K | CRI >80 | UGR<19 | IP67 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE

Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 12°, 18°, 36°, 55°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- Remote 24VDC LED Driver to be Ordered Separately




Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors




Optional Accessory



Honeycomb

Light Distribution

2700K

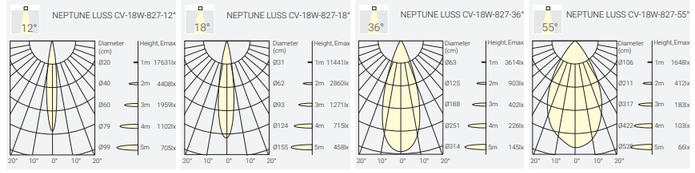

Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	12°	1400lm	NEPTUNE LUSS-18W-827-12°	NU4SC-8271218N-DN
					18°	1450lm	NEPTUNE LUSS-18W-827-18°	NU4SC-8271818N-DN
					36°	1450lm	NEPTUNE LUSS-18W-827-36°	NU4SC-8273618N-DN
					55°	1400lm	NEPTUNE LUSS-18W-827-55°	NU4SC-8275518N-DN
				3000K	12°	1500lm	NEPTUNE LUSS-18W-830-12°	NU4SC-8301218N-DN
					18°	1600lm	NEPTUNE LUSS-18W-830-18°	NU4SC-8301818N-DN
					36°	1600lm	NEPTUNE LUSS-18W-830-36°	NU4SC-8303618N-DN
					55°	1500lm	NEPTUNE LUSS-18W-830-55°	NU4SC-8305518N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

Coding

NU4SC – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NU4SC NEPTUNE LUSS CV	827 CRI>80/ 2700K 830 CRI>80/ 3000K	12 12° 18 18° 36 36° 55 55°	18 18W	N None	D Dark-Grey G Green R Rust	N None	

NEPTUNE Base Version

Standard 24VDC Version


LED Driver Integrated Version Optional

Installation Possibilities:

1 -Rear Cable
2 -Metal Tube
3 -PVC Pipe
4 -Direct Cable
5 -Corrugated Tube
6 -Spike Mounted







Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb


15° 30° 40° 2700K 3000K CRI >80 UGR<19 IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE

Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input

Light Distribution

2700K

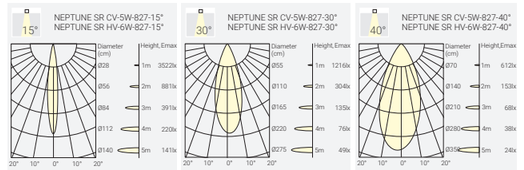

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SR CV-5W-827-15°	NR1C-8271505N-DN
					30°	380lm	NEPTUNE SR CV-5W-827-30°	NR1C-8273005N-DN
					40°	300lm	NEPTUNE SR CV-5W-827-40°	NR1C-8274005N-DN
				3000K	15°	420lm	NEPTUNE SR CV-5W-830-15°	NR1C-8301505N-DN
					30°	420lm	NEPTUNE SR CV-5W-830-30°	NR1C-8303005N-DN
					40°	350lm	NEPTUNE SR CV-5W-830-40°	NR1C-8304005N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	2700K	15°	380lm	NEPTUNE SR HV-6W-827-15°	NR1H-8271506F-DN
					30°	380lm	NEPTUNE SR HV-6W-827-30°	NR1H-8273006F-DN
					40°	300lm	NEPTUNE SR HV-6W-827-40°	NR1H-8274006F-DN
				3000K	15°	420lm	NEPTUNE SR HV-6W-830-15°	NR1H-8301506F-DN
					30°	420lm	NEPTUNE SR HV-6W-830-30°	NR1H-8303006F-DN
					40°	350lm	NEPTUNE SR HV-6W-830-40°	NR1H-8304006F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR1H – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NR1H NEPTUNE SR CV	827 CRI>80/ 2700K	15 15°	05 5W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	30 30°	06 6W	F ON-OFF	G Green		
		40 40°			R Rust		

NEPTUNE SRBS – Projector Light

New




15° 30° 40° 2700K 3000K CRI >80 UGR<19

IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

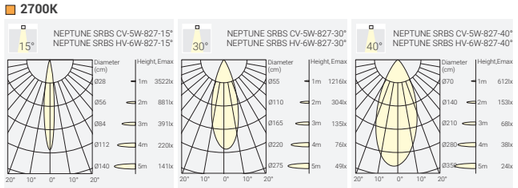

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SRBS CV-5W-827-15°	NR1BC-8271505N-DN
					30°	380lm	NEPTUNE SRBS CV-5W-827-30°	NR1BC-8273005N-DN
					40°	300lm	NEPTUNE SRBS CV-5W-827-40°	NR1BC-8274005N-DN
				3000K	15°	420lm	NEPTUNE SRBS CV-5W-830-15°	NR1BC-8301505N-DN
					30°	420lm	NEPTUNE SRBS CV-5W-830-30°	NR1BC-8303005N-DN
					40°	350lm	NEPTUNE SRBS CV-5W-830-40°	NR1BC-8304005N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	2700K	15°	380lm	NEPTUNE SRBS HV-6W-827-15°	NR1BH-8271506F-DN
					30°	380lm	NEPTUNE SRBS HV-6W-827-30°	NR1BH-8273006F-DN
					40°	300lm	NEPTUNE SRBS HV-6W-827-40°	NR1BH-8274006F-DN
				3000K	15°	420lm	NEPTUNE SRBS HV-6W-830-15°	NR1BH-8301506F-DN
					30°	420lm	NEPTUNE SRBS HV-6W-830-30°	NR1BH-8303006F-DN
					40°	350lm	NEPTUNE SRBS HV-6W-830-40°	NR1BH-8304006F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR1BH	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
NR1BH NEPTUNE SRBS CV		827 CRI>80/ 2700K 830 CRI>80/ 3000K	15 15° 30 30° 40 40°	05 5W 06 6W	N None F ON-OFF		D Dark-Grey G Green R Rust	N None		

NEPTUNE SRSS – Projector Light

New




15° 30° 40° 2700K 3000K CRI >80 UGR<19

IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

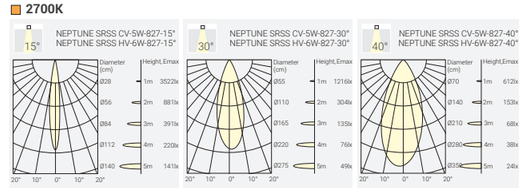

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SRSS CV-5W-827-15°	NR1SC-8271505N-DN
					30°	380lm	NEPTUNE SRSS CV-5W-827-30°	NR1SC-8273005N-DN
					40°	300lm	NEPTUNE SRSS CV-5W-827-40°	NR1SC-8274005N-DN
				3000K	15°	420lm	NEPTUNE SRSS CV-5W-830-15°	NR1SC-8301505N-DN
					30°	420lm	NEPTUNE SRSS CV-5W-830-30°	NR1SC-8303005N-DN
					40°	350lm	NEPTUNE SRSS CV-5W-830-40°	NR1SC-8304005N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
4W	6W	220-240VAC	80	2700K	15°	380lm	NEPTUNE SRSS HV-6W-827-15°	NR1SH-8271506F-DN
					30°	380lm	NEPTUNE SRSS HV-6W-827-30°	NR1SH-8273006F-DN
					40°	300lm	NEPTUNE SRSS HV-6W-827-40°	NR1SH-8274006F-DN
				3000K	15°	420lm	NEPTUNE SRSS HV-6W-830-15°	NR1SH-8301506F-DN
					30°	420lm	NEPTUNE SRSS HV-6W-830-30°	NR1SH-8303006F-DN
					40°	350lm	NEPTUNE SRSS HV-6W-830-40°	NR1SH-8304006F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR1SH	–	***	**	**	*	–	*	*	–	*
Model		CRI/ CCT	Beam Angle	Power	Control		Finish	Reflector Color		Accessory
NR1SH NEPTUNE SRSS CV		827 CRI>80/ 2700K 830 CRI>80/ 3000K	15 15° 30 30° 40 40°	05 5W 06 6W	N None F ON-OFF		D Dark-Grey G Green R Rust	N None		


NEPTUNE MR – Projector Light



10° 20° 30° 55° 2700K 3000K CRI >80 UGR<19 IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 55°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

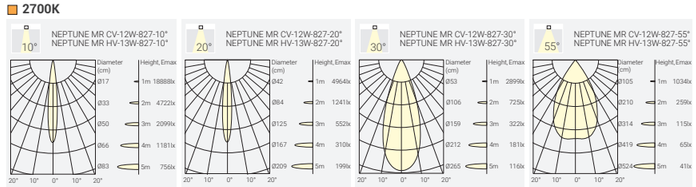

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MR CV-12W-827-10°	NR2C-8271012N-DN
					20°	850lm	NEPTUNE MR CV-12W-827-20°	NR2C-8272012N-DN
					30°	850lm	NEPTUNE MR CV-12W-827-30°	NR2C-8273012N-DN
					55°	800lm	NEPTUNE MR CV-12W-827-55°	NR2C-8275512N-DN
				3000K	10°	850lm	NEPTUNE MR CV-12W-830-10°	NR2C-8301012N-DN
					20°	950lm	NEPTUNE MR CV-12W-830-20°	NR2C-8302012N-DN
					30°	950lm	NEPTUNE MR CV-12W-830-30°	NR2C-8303012N-DN
					55°	850lm	NEPTUNE MR CV-12W-830-55°	NR2C-8305512N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
11W	13W	220-240VAC	80	2700K	10°	800lm	NEPTUNE MR HV-13W-827-10°	NR2H-8271013F-DN
					20°	850lm	NEPTUNE MR HV-13W-827-20°	NR2H-8272013F-DN
					30°	850lm	NEPTUNE MR HV-13W-827-30°	NR2H-8273013F-DN
					55°	800lm	NEPTUNE MR HV-13W-827-55°	NR2H-8275513F-DN
				3000K	10°	850lm	NEPTUNE MR HV-13W-830-10°	NR2H-8301013F-DN
					20°	950lm	NEPTUNE MR HV-13W-830-20°	NR2H-8302013F-DN
					30°	950lm	NEPTUNE MR HV-13W-830-30°	NR2H-8303013F-DN
					55°	850lm	NEPTUNE MR HV-13W-830-55°	NR2H-8305513F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR2H – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NR2H NEPTUNE MR HV	827 CRI>80/ 2700K	10 10°	12 12W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	20 20°	13 13W	F ON-OFF	G Green		
		30 30°			R Rust		
		55 55°					

NEPTUNE MRBS – Projector Light


New



10° 20° 30° 55° 2700K 3000K CRI >80 UGR<19 IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 55°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

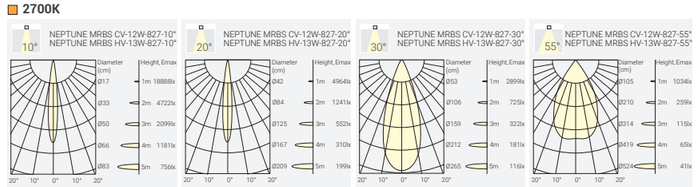

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MRBS CV-12W-827-10°	NR2BC-8271012N-DN
					20°	850lm	NEPTUNE MRBS CV-12W-827-20°	NR2BC-8272012N-DN
					30°	850lm	NEPTUNE MRBS CV-12W-827-30°	NR2BC-8273012N-DN
					55°	800lm	NEPTUNE MRBS CV-12W-827-55°	NR2BC-8275512N-DN
				3000K	10°	850lm	NEPTUNE MRBS CV-12W-830-10°	NR2BC-8301012N-DN
					20°	950lm	NEPTUNE MRBS CV-12W-830-20°	NR2BC-8302012N-DN
					30°	950lm	NEPTUNE MRBS CV-12W-830-30°	NR2BC-8303012N-DN
					55°	850lm	NEPTUNE MRBS CV-12W-830-55°	NR2BC-8305512N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
11W	13W	220-240VAC	80	2700K	10°	800lm	NEPTUNE MRBS HV-13W-827-10°	NR2BH-8271013F-DN
					20°	850lm	NEPTUNE MRBS HV-13W-827-20°	NR2BH-8272013F-DN
					30°	850lm	NEPTUNE MRBS HV-13W-827-30°	NR2BH-8273013F-DN
					55°	800lm	NEPTUNE MRBS HV-13W-827-55°	NR2BH-8275513F-DN
				3000K	10°	850lm	NEPTUNE MRBS HV-13W-830-10°	NR2BH-8301013F-DN
					20°	950lm	NEPTUNE MRBS HV-13W-830-20°	NR2BH-8302013F-DN
					30°	950lm	NEPTUNE MRBS HV-13W-830-30°	NR2BH-8303013F-DN
					55°	850lm	NEPTUNE MRBS HV-13W-830-55°	NR2BH-8305513F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR2BH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NR2BH NEPTUNE MRBS HV	827 CRI>80/ 2700K	10 10°	12 12W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	20 20°	13 13W	F ON-OFF	G Green		
		30 30°			R Rust		
		55 55°					

NEPTUNE MRSS – Projector Light

New




10° 20° 30° 55° 2700K 3000K CRI >80 UGR<19

IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 55°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

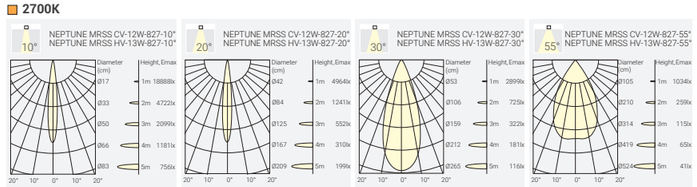

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MRSS CV-12W-827-10°	NR2SC-8271012N-DN
					20°	850lm	NEPTUNE MRSS CV-12W-827-20°	NR2SC-8272012N-DN
					30°	850lm	NEPTUNE MRSS CV-12W-827-30°	NR2SC-8273012N-DN
					55°	800lm	NEPTUNE MRSS CV-12W-827-55°	NR2SC-8275512N-DN
				3000K	10°	850lm	NEPTUNE MRSS CV-12W-830-10°	NR2SC-8301012N-DN
					20°	950lm	NEPTUNE MRSS CV-12W-830-20°	NR2SC-8302012N-DN
					30°	950lm	NEPTUNE MRSS CV-12W-830-30°	NR2SC-8303012N-DN
					55°	850lm	NEPTUNE MRSS CV-12W-830-55°	NR2SC-8305512N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
11W	13W	220-240VAC	80	2700K	10°	800lm	NEPTUNE MRSS HV-13W-827-10°	NR2SH-8271013F-DN
					20°	850lm	NEPTUNE MRSS HV-13W-827-20°	NR2SH-8272013F-DN
					30°	850lm	NEPTUNE MRSS HV-13W-827-30°	NR2SH-8273013F-DN
					55°	800lm	NEPTUNE MRSS HV-13W-827-55°	NR2SH-8275513F-DN
				3000K	10°	850lm	NEPTUNE MRSS HV-13W-830-10°	NR2SH-8301013F-DN
					20°	950lm	NEPTUNE MRSS HV-13W-830-20°	NR2SH-8302013F-DN
					30°	950lm	NEPTUNE MRSS HV-13W-830-30°	NR2SH-8303013F-DN
					55°	850lm	NEPTUNE MRSS HV-13W-830-55°	NR2SH-8305513F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR2SH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NR2SH NEPTUNE MRSS HV	827 CRI>80/ 2700K	10 10°	12 12W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	20 20°	13 13W	F ON-OFF	G Green		
		30 30°			R Rust		
		55 55°					

NEPTUNE LR – Projector Light




10° 20° 30° 50° 2700K 3000K CRI >80 UGR<19

IP66 CE CREE 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

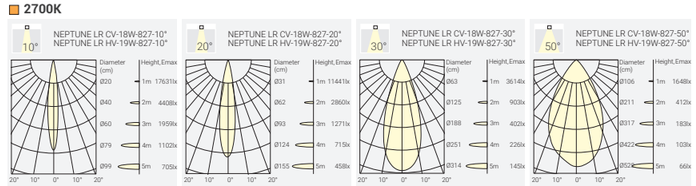

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LR CV-18W-827-10°	NR3C-8271018N-DN
					20°	1450lm	NEPTUNE LR CV-18W-827-20°	NR3C-8272018N-DN
					30°	1450lm	NEPTUNE LR CV-18W-827-30°	NR3C-8273018N-DN
					50°	1400lm	NEPTUNE LR CV-18W-827-50°	NR3C-8275018N-DN
				3000K	10°	1500lm	NEPTUNE LR CV-18W-830-10°	NR3C-8301018N-DN
					20°	1600lm	NEPTUNE LR CV-18W-830-20°	NR3C-8302018N-DN
					30°	1600lm	NEPTUNE LR CV-18W-830-30°	NR3C-8303018N-DN
					50°	1500lm	NEPTUNE LR CV-18W-830-50°	NR3C-8305018N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
16W	19W	220-240VAC	80	2700K	10°	1400lm	NEPTUNE LR HV-19W-827-10°	NR3H-8271019F-DN
					20°	1450lm	NEPTUNE LR HV-19W-827-20°	NR3H-8272019F-DN
					30°	1450lm	NEPTUNE LR HV-19W-827-30°	NR3H-8273019F-DN
					50°	1400lm	NEPTUNE LR HV-19W-827-50°	NR3H-8275019F-DN
				3000K	10°	1500lm	NEPTUNE LR HV-19W-830-10°	NR3H-8301019F-DN
					20°	1600lm	NEPTUNE LR HV-19W-830-20°	NR3H-8302019F-DN
					30°	1600lm	NEPTUNE LR HV-19W-830-30°	NR3H-8303019F-DN
					50°	1500lm	NEPTUNE LR HV-19W-830-50°	NR3H-8305019F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR3H – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NR3H NEPTUNE LR HV	827 CRI>80/ 2700K	10 10°	18 18W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	20 20°	19 19W	F ON-OFF	G Green		
		30 30°			R Rust		
		50 50°					

NEPTUNE LRBS – Projector Light

New




10° 20° 30° 50° | 2700K 3000K | CRI >80 | UGR<19

IP66 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

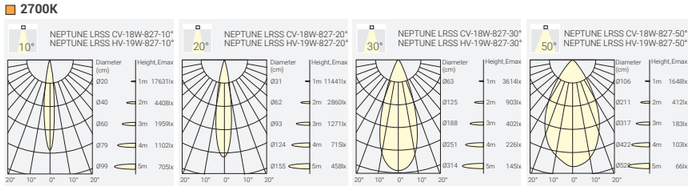

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LRBS CV-18W-827-10°	NR3BC-8271018N-DN
					20°	1450lm	NEPTUNE LRBS CV-18W-827-20°	NR3BC-8272018N-DN
					30°	1450lm	NEPTUNE LRBS CV-18W-827-30°	NR3BC-8273018N-DN
					50°	1400lm	NEPTUNE LRBS CV-18W-827-50°	NR3BC-8275018N-DN
				3000K	10°	1500lm	NEPTUNE LRBS CV-18W-830-10°	NR3BC-8301018N-DN
					20°	1600lm	NEPTUNE LRBS CV-18W-830-20°	NR3BC-8302018N-DN
					30°	1600lm	NEPTUNE LRBS CV-18W-830-30°	NR3BC-8303018N-DN
					50°	1500lm	NEPTUNE LRBS CV-18W-830-50°	NR3BC-8305018N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
16W	19W	220-240VAC	80	2700K	10°	1400lm	NEPTUNE LRBS HV-19W-827-10°	NR3BH-8271019F-DN
					20°	1450lm	NEPTUNE LRBS HV-19W-827-20°	NR3BH-8272019F-DN
					30°	1450lm	NEPTUNE LRBS HV-19W-827-30°	NR3BH-8273019F-DN
					50°	1400lm	NEPTUNE LRBS HV-19W-827-50°	NR3BH-8275019F-DN
				3000K	10°	1500lm	NEPTUNE LRBS HV-19W-830-10°	NR3BH-8301019F-DN
					20°	1600lm	NEPTUNE LRBS HV-19W-830-20°	NR3BH-8302019F-DN
					30°	1600lm	NEPTUNE LRBS HV-19W-830-30°	NR3BH-8303019F-DN
					50°	1500lm	NEPTUNE LRBS HV-19W-830-50°	NR3BH-8305019F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR3BH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NR3BH NEPTUNE LRBS HV	827 CRI>80/ 2700K	10 10°	18 18W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	20 20°	19 19W	F ON-OFF	G Green		
		30 30°			R Rust		
		50 50°					

NEPTUNE LRSS – Projector Light

New




10° 20° 30° 50° | 2700K 3000K | CRI >80 | UGR<19

IP66 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

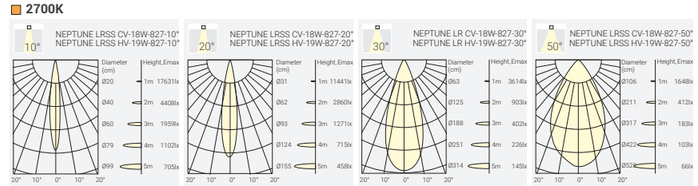

Standard Finish



Dark-Grey

Optional Finish



Rust Green

Accessory: Spike for NEPTUNE series projectors



Optional Accessory



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LRSS CV-18W-827-10°	NR3SC-8271018N-DN
					20°	1450lm	NEPTUNE LRSS CV-18W-827-20°	NR3SC-8272018N-DN
					30°	1450lm	NEPTUNE LRSS CV-18W-827-30°	NR3SC-8273018N-DN
					50°	1400lm	NEPTUNE LRSS CV-18W-827-50°	NR3SC-8275018N-DN
				3000K	10°	1500lm	NEPTUNE LRSS CV-18W-830-10°	NR3SC-8301018N-DN
					20°	1600lm	NEPTUNE LRSS CV-18W-830-20°	NR3SC-8302018N-DN
					30°	1600lm	NEPTUNE LRSS CV-18W-830-30°	NR3SC-8303018N-DN
					50°	1500lm	NEPTUNE LRSS CV-18W-830-50°	NR3SC-8305018N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
16W	19W	220-240VAC	80	2700K	10°	1400lm	NEPTUNE LRSS HV-19W-827-10°	NR3SH-8271019F-DN
					20°	1450lm	NEPTUNE LRSS HV-19W-827-20°	NR3SH-8272019F-DN
					30°	1450lm	NEPTUNE LRSS HV-19W-827-30°	NR3SH-8273019F-DN
					50°	1400lm	NEPTUNE LRSS HV-19W-827-50°	NR3SH-8275019F-DN
				3000K	10°	1500lm	NEPTUNE LRSS HV-19W-830-10°	NR3SH-8301019F-DN
					20°	1600lm	NEPTUNE LRSS HV-19W-830-20°	NR3SH-8302019F-DN
					30°	1600lm	NEPTUNE LRSS HV-19W-830-30°	NR3SH-8303019F-DN
					50°	1500lm	NEPTUNE LRSS HV-19W-830-50°	NR3SH-8305019F-DN

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NR3SH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NR3SH NEPTUNE LRSS HV	827 CRI>80/ 2700K	10 10°	18 18W	N None	D Dark-Grey	N None	
	830 CRI>80/ 3000K	20 20°	19 19W	F ON-OFF	G Green		
		30 30°			R Rust		
		50 50°					


NEPTUNE – Projector Light

New

Light Engine





Mounting Type

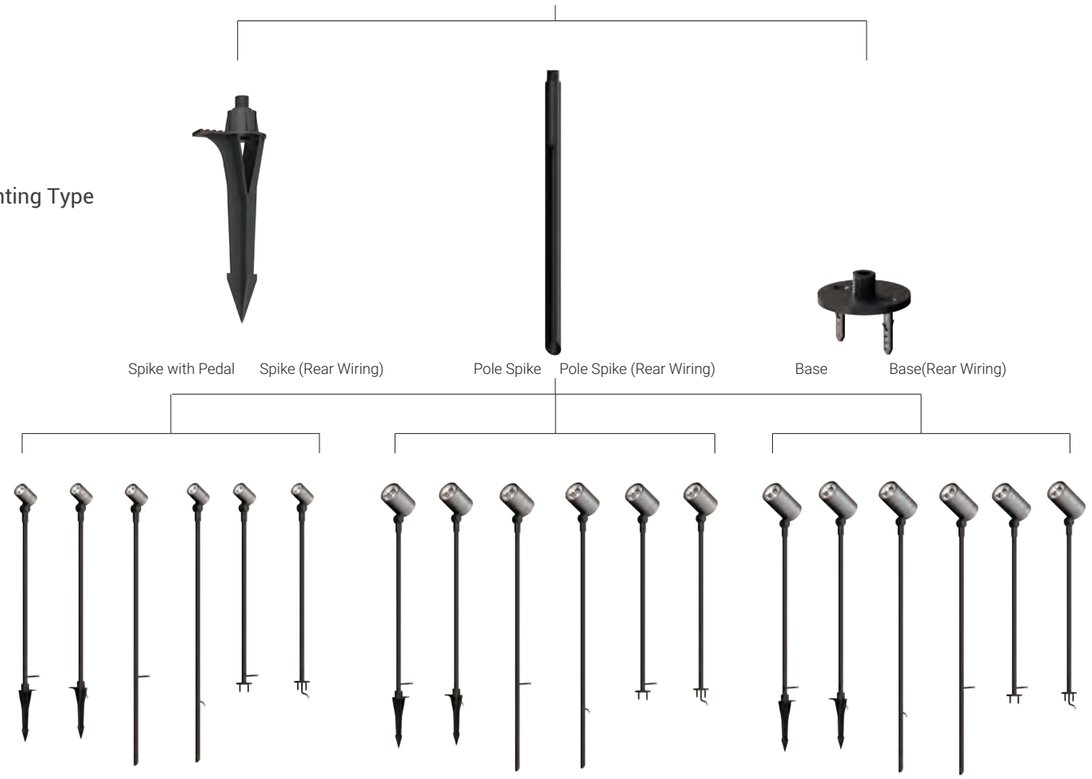

NEPTUNE SP – Projector Light

New

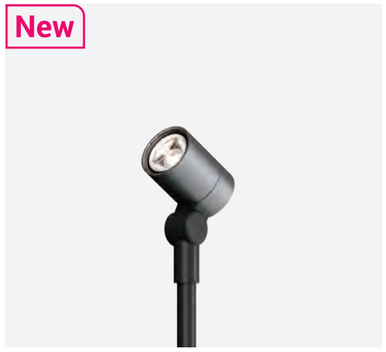




15° 30° 40° 2700K 3000K CRI >80 UGR<19 IP66 CE bridgelux 50,000h@L90B10 5 YEARS GUARANTEE

Quick Info

- Bridgelux LED: 4W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 40°
- Lumen Output: Up to 420lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input

Light Distribution

2700K

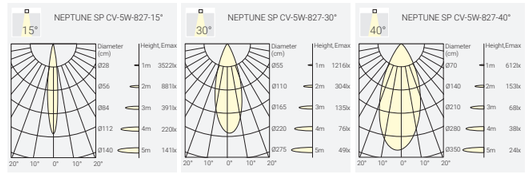

Standard Finish



Dark-Grey

Accessory



K1
Spike with Pedal

K2
Pole Spike



K3
Base



K4
Spike (Rear Wiring)

K5
Pole Spike (Rear Wiring)



K6
Base(Rear Wiring)

EP300
Extension Pole



Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
4W	5W	24VDC	80	2700K	15°	380lm	NEPTUNE SP CV-5W-827-15°	NP1C-8271505N-DN-K1
					30°	380lm	NEPTUNE SP CV-5W-827-30°	NP1C-8273005N-DN-K1
					40°	300lm	NEPTUNE SP CV-5W-827-40°	NP1C-8274005N-DN-K1
				3000K	15°	420lm	NEPTUNE SP CV-5W-830-15°	NP1C-8301505N-DN-K1
					30°	420lm	NEPTUNE SP CV-5W-830-30°	NP1C-8303005N-DN-K1
					40°	350lm	NEPTUNE SP CV-5W-830-40°	NP1C-8304005N-DN-K1

Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
2.4W	3.5W	220-240VAC	80	2700K	15°	135lm	NEPTUNE SP HV-4W-827-15°	NP1H-8271504F-DN-K1
					30°	166lm	NEPTUNE SP HV-4W-827-30°	NP1H-8273004F-DN-K1
					40°	135lm	NEPTUNE SP HV-4W-827-40°	NP1H-8274004F-DN-K1
				3000K	15°	150lm	NEPTUNE SP HV-4W-830-15°	NP1H-8301504F-DN-K1
					30°	185lm	NEPTUNE SP HV-4W-830-30°	NP1H-8303004F-DN-K1
					40°	150lm	NEPTUNE SP HV-4W-830-40°	NP1H-8304004F-DN-K1

Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input


Coding

NP1H – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NP1H NEPTUNE SP CV	827 CRI>80/ 2700K 830 CRI>80/ 3000K	15 15° 30 30° 40 40°	04 4W 05 5W	N None F ON-OFF	D Dark-Grey	N None	

NEPTUNE MP – Projector Light

New

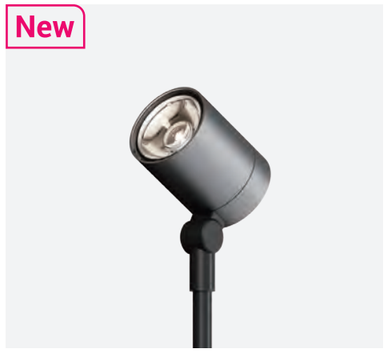


10° 20° 30° 55° 2700K 3000K CRI >80 UGR<19

IP66 CE bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 11W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 55°
- Lumen Output: Up to 950lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

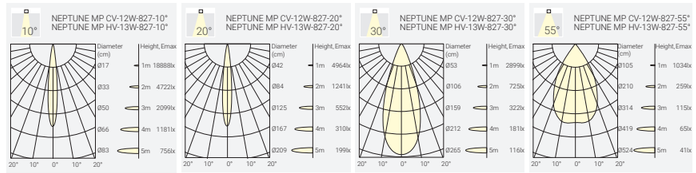

Standard Finish



Dark-Grey


Accessory



K1 Spike with Pedal | K2 Pole Spike | K3 Base



K4 Spike (Rear Wiring) | K5 Pole Spike (Rear Wiring) | K6 Base(Rear Wiring)



EP300 Extension Pole | Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
11W	12W	24VDC	80	2700K	10°	800lm	NEPTUNE MP CV-12W-827-10°	NP2C-8271012N-DN-K1
					20°	850lm	NEPTUNE MP CV-12W-827-20°	NP2C-8272012N-DN-K1
					30°	850lm	NEPTUNE MP CV-12W-827-30°	NP2C-8273012N-DN-K1
					55°	800lm	NEPTUNE MP CV-12W-827-55°	NP2C-8275512N-DN-K1
				3000K	10°	850lm	NEPTUNE MP CV-12W-830-10°	NP2C-8301012N-DN-K1
					20°	950lm	NEPTUNE MP CV-12W-830-20°	NP2C-8302012N-DN-K1
					30°	950lm	NEPTUNE MP CV-12W-830-30°	NP2C-8303012N-DN-K1
					55°	850lm	NEPTUNE MP CV-12W-830-55°	NP2C-8305512N-DN-K1

Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
11W	13W	220-240VAC	80	2700K	10°	800lm	NEPTUNE MP HV-13W-827-10°	NP2H-8271013F-DN-K1
					20°	850lm	NEPTUNE MP HV-13W-827-20°	NP2H-8272013F-DN-K1
					30°	850lm	NEPTUNE MP HV-13W-827-30°	NP2H-8273013F-DN-K1
					55°	800lm	NEPTUNE MP HV-13W-827-55°	NP2H-8275513F-DN-K1
				3000K	10°	850lm	NEPTUNE MP HV-13W-830-10°	NP2H-8301013F-DN-K1
					20°	950lm	NEPTUNE MP HV-13W-830-20°	NP2H-8302013F-DN-K1
					30°	950lm	NEPTUNE MP HV-13W-830-30°	NP2H-8303013F-DN-K1
					55°	850lm	NEPTUNE MP HV-13W-830-55°	NP2H-8305513F-DN-K1

Code Remark: K1=(Spike with Pedal) K2=(Pole Spike) K3=(Base) K4=Spike (Rear Wiring) K5=Pole Spike (Rear Wiring) K6=Base(Rear Wiring)

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NP2H – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NP2H NEPTUNE MP HV	**827** CRI>80/ 2700K	**10** 10°	**12** 12W	**N** None	**D** Dark-Grey	**N** None	
	830 CRI>80/ 3000K	**20** 20°	**13** 13W	**F** ON-OFF			
		30 30°					
		55 55°					

NEPTUNE LP – Projector Light

New




10° 20° 30° 50° 2700K 3000K CRI >80 UGR<19

IP66 CE bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 16W, CRI>80, 2700K, 3000K
- Beam Angle: 10°, 20°, 30°, 50°
- Lumen Output: Up to 1600lm System Luminous Flux
- IP Class: IP66
- Body: Aluminum; Color: Dark-Grey
- 24VDC Version: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver
- LED Driver Integrated Version: On-Off, 220~240VAC Input



Light Distribution

2700K

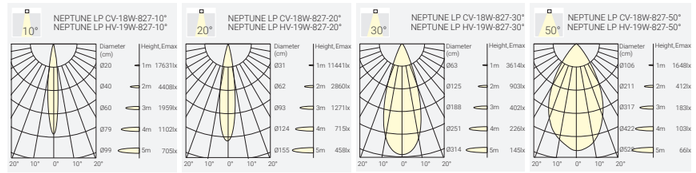

Standard Finish



Dark-Grey


Accessory



K1 Spike with Pedal | K2 Pole Spike | K3 Base



K4 Spike (Rear Wiring) | K5 Pole Spike (Rear Wiring) | K6 Base(Rear Wiring)



EP300 Extension Pole | Honeycomb

Order Info

24VDC Version

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
16W	18W	24VDC	80	2700K	10°	1400lm	NEPTUNE LP CV-18W-827-10°	NP3SC-8271018N-DN-K1
					20°	1450lm	NEPTUNE LP CV-18W-827-20°	NP3SC-8272018N-DN-K1
					30°	1450lm	NEPTUNE LP CV-18W-827-30°	NP3SC-8273018N-DN-K1
					50°	1400lm	NEPTUNE LP CV-18W-827-50°	NP3SC-8275018N-DN-K1
				3000K	10°	1500lm	NEPTUNE LP CV-18W-830-10°	NP3SC-8301018N-DN-K1
					20°	1600lm	NEPTUNE LP CV-18W-830-20°	NP3SC-8302018N-DN-K1
					30°	1600lm	NEPTUNE LP CV-18W-830-30°	NP3SC-8303018N-DN-K1
					50°	1500lm	NEPTUNE LP CV-18W-830-50°	NP3SC-8305018N-DN-K1

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver Remote 24VDC LED Driver to be Ordered Separately

LED Driver Integrated Version

LED Power	System Power	Input	CRI	CCT	Beam	System Output	Model	Code
16W	19W	220-240VAC	80	2700K	10°	1400lm	NEPTUNE LP HV-19W-827-10°	NP3SH-8271019F-DN-K1
					20°	1450lm	NEPTUNE LP HV-19W-827-20°	NP3SH-8272019F-DN-K1
					30°	1450lm	NEPTUNE LP HV-19W-827-30°	NP3SH-8273019F-DN-K1
					50°	1400lm	NEPTUNE LP HV-19W-827-50°	NP3SH-8275019F-DN-K1
				3000K	10°	1500lm	NEPTUNE LP HV-19W-830-10°	NP3SH-8301019F-DN-K1
					20°	1600lm	NEPTUNE LP HV-19W-830-20°	NP3SH-8302019F-DN-K1
					30°	1600lm	NEPTUNE LP HV-19W-830-30°	NP3SH-8303019F-DN-K1
					50°	1500lm	NEPTUNE LP HV-19W-830-50°	NP3SH-8305019F-DN-K1

Code Remark: F=(ON-OFF) **Remark:** On-Off LED Driver Integrated, 220~240VAC Input

Coding

NP3SH – *** ** ** * – * * – *

Model	CRI/ CCT	Beam Angle	Power	Control	Finish	Reflector Color	Accessory
NP3SH NEPTUNE LP HV	**827** CRI>80/ 2700K	**10** 10°	**18** 18W	**N** None	**D** Dark-Grey	**N** None	
	830 CRI>80/ 3000K	**20** 20°	**19** 19W	**F** ON-OFF			
		30 30°					
		50 50°					

TERARACE MICRO – Recessed Ground Light




30° 40° 65° 2700K 3000K CRI >80

IP67 IK08 CE OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- OSRAM LED: 1W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 40°, 65°
- Lumen Output: Up to 100lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)




Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1W	1.5W	24V	80	2700K	30°	90lm	TERARACE Micro-827-30°	TEMI-8273002F-DN
					40°	90lm	TERARACE Micro-827-40°	TEMI-8274002F-DN
					65°	90lm	TERARACE Micro-827-65°	TEMI-8276502F-DN
				3000K	30°	100lm	TERARACE Micro-830-30°	TEMI-8303002F-DN
					40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
					65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

TERARACE NANO – Recessed Ground Light




18° 35° 60° 2700K 3000K CRI >80

IP67 IK08 CE OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- OSRAM LED: 1.6W, CRI>80, 2700K, 3000K
- Beam Angle: 18°, 35°, 60°
- Lumen Output: Up to 120lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)




Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6W	2W	24V	80	2700K	18°	110lm	TERARACE Nano-827-18°	TENA-8271802F-DN
					35°	110lm	TERARACE Nano-827-35°	TENA-8273502F-DN
					60°	110lm	TERARACE Nano-827-60°	TENA-8276002F-DN
				3000K	18°	120lm	TERARACE Nano-830-18°	TENA-8301802F-DN
					35°	120lm	TERARACE Nano-830-35°	TENA-8303502F-DN
					60°	120lm	TERARACE Nano-830-60°	TENA-8306002F-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)


TERARACE MINI – Recessed Ground Light



30° 45° 2700K 3000K CRI >80
IP67 IK08 CE CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- CITIZEN LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 500lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)



Light Distribution

3000K





Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	480lm	TERARACE Mini-827-30°	TEMI-8273006N-DN
					45°	480lm	TERARACE Mini-827-45°	TEMI-8274506N-DN
				3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006N-DN
					45°	500lm	TERARACE Mini-830-45°	TEMI-8304506N-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)


TERARACE MAXI – Recessed Ground Light



20° 30° 50° 2700K 3000K CRI >80
IP67 IK08 CE bridgelux. 50,000h@L90B10 5 YEARS GUARANTEE


Quick Info


- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 20°, 30°, 50°
- Lumen Output: Up to 850lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required (Non-Dimmable)




Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	20°	810lm	TERARACE Maxi-827-20°	TEMA-8272010N-DN
					30°	810lm	TERARACE Maxi-827-30°	TEMA-8273010N-DN
					50°	810lm	TERARACE Maxi-827-50°	TEMA-8275010N-DN
				3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010N-DN
					30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010N-DN
					50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010N-DN

Remark: Remote 24VDC LED driver is required (Non-Dimmable)

TERARACE NANO Dimming – Recessed Ground Light

New




15° 30° 60° 2700K 3000K CRI >80

IP67 IK08 CE OSRAM 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- OSRAM LED: 3 W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 30°, 60°
- Lumen Output: Up to 260lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required




Light Distribution

3000K







Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
3W	3.5W	24V	80	2700K	15°	250lm	TERARACE NANO Dimming-827-15°	TNAD-8271504N-DN
					30°	210lm	TERARACE NANO Dimming-827-30°	TNAD-8273004N-DN
					60°	180lm	TERARACE NANO Dimming-827-60°	TNAD-8276004N-DN
				3000K	15°	260lm	TERARACE NANO Dimming-830-15°	TNAD-8301504N-DN
					30°	220lm	TERARACE NANO Dimming-830-30°	TNAD-8303004N-DN
					60°	190lm	TERARACE NANO Dimming-830-60°	TNAD-8306004N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver

TERARACE MINI Dimming – Recessed Ground Light

New




30° 45° 2700K 3000K CRI >80

IP67 IK08 CE CITIZEN 50,000h@L80B10 5 YEARS GUARANTEE


Quick Info


- CITTIZEN LED: 5W, CRI>80, 2700K, 3000K
- Beam Angle: 30°, 45°
- Lumen Output: Up to 410lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required



Light Distribution

3000K





Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5W	5.5W	24V	80	2700K	30°	400lm	TERARACE MINI Dimming-827-30°	TMID-8273006N-DN
					45°	400lm	TERARACE MINI Dimming-827-45°	TMID-8274506N-DN
				3000K	30°	410lm	TERARACE MINI Dimming-830-30°	TMID-8303006N-DN
					45°	410lm	TERARACE MINI Dimming-830-45°	TMID-8304506N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver

TERARACE MAXI Dimming – Recessed Ground Light

New




15° 35° 45° | 2700K 3000K | CRI >80

IP67 | IK08 | CE | bridgelux. 50,000h@L90B10 | 5 YEARS GUARANTEE


Quick Info

- Bridgelux LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: 15°, 35°, 45°
- Lumen Output: Up to 960lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required



Light Distribution

3000K

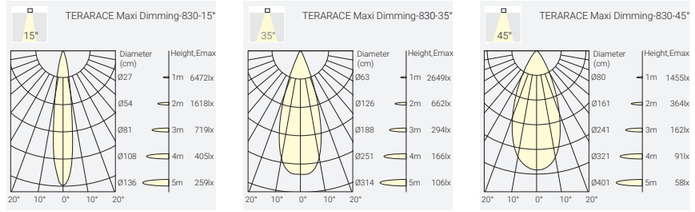

Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	15°	740lm	TERARACE MAXI Dimming-827-15°	TMAD-8271510N-DN
					35°	930lm	TERARACE MAXI Dimming-827-35°	TMAD-8273510N-DN
					45°	870lm	TERARACE MAXI Dimming-827-45°	TMAD-8274510N-DN
				3000K	15°	760lm	TERARACE MAXI Dimming-830-15°	TMAD-8301510N-DN
					35°	960lm	TERARACE MAXI Dimming-830-35°	TMAD-8303510N-DN
					45°	900lm	TERARACE MAXI Dimming-830-45°	TMAD-8304510N-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver

TERARACE Maxi Wall Washer – Recessed Ground Light

New




Wall Washer | 2700K 3000K | CRI >80

IP67 | IK08 | CE | CREE 50,000h@L80B10 | 5 YEARS GUARANTEE


Quick Info

- CREE LED: 9W, CRI>80, 2700K, 3000K
- Beam Angle: Wall Washer
- Lumen Output: Up to 760lm System Luminous Flux
- IP Class: IP67
- Body: Aluminum; Color: Dark-Grey
- LED Driver: Remote 24VDC LED driver is required



Light Distribution

3000K




Accessory: Pre-embedded Tube



Order Info

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9W	10W	24V	80	2700K	Wall Washer	580lm	TERARACE Maxi Wall Washer	TEMA-827WW10F-DN
				3000K	Wall Washer	760lm	TERARACE Maxi Wall Washer	TEMA-830WW10F-DN

Remark: Compatible with On-Off/ Phase Dim/ 0-10V Dim/ DALI Dim Remote 24VDC LED Driver

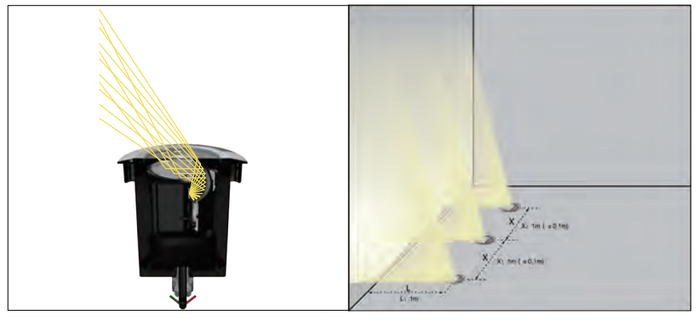

Professional wall washing optics

Headquarters

Switzerland

NEKO Lighting AG
Kreuzstrasse 2, CH-8008, Zürich, Switzerland
T +41 44 451 8015
sales@nekolighting.com
https://nekolighting.com/de/

Factory

China

NEKO Lighting Ltd.
Nairui Technology Park, No. 5 Weideng Road
Maan Town, Huicheng District, Huizhou
Guangdong, 516000, China
T +86 752 2088 669
sales@nekolighting.com
https://nekolighting.com/

Office & Warehouse

Germany

NEKO Lighting GmbH
Kruppstrasse 47 (Office), 59227 Ahlen, Germany
Lange Reihe 170 (Warehouse), 59071 Hamm, Germany
T +49 2381 877 09 60
sales@nekolighting.de
https://nekolighting.com/de/

Office

France

NEKO Lighting
41, rue des Dames, 75017, Paris, France
T +33 1 44 50 20 30
sales@nekolighting.fr
https://nekolighting.com/fr/

Switzerland

NEKO Lighting AG
Rebstockstrasse 18
CH-6017, Ruswil
Switzerland
T +41 79 951 21 43
franz@nekolighting.com
https://nekolighting.com/

UK

NEKO Lighting
Unit 14E, Calderdale Business Park
Club Lane, Halifax, HX2 8DB, West Yorkshire, UK
T +0330 0571 888
hello@nekolightinguk.com
https://nekolighting.com/

UAE (MENA)


NEKO Lighting
Dubai, UAE
T +97 1502426911
david@nekolighting.com
https://nekolighting.com/

Saudi Arabia

NEKO Lighting
Riyadh 11461, Saudi Arabia
sales@nekolighting.com
https://nekolighting.com/

Singapore

NEKO Lighting
Singapore
sales@nekolighting.com
https://nekolighting.com/

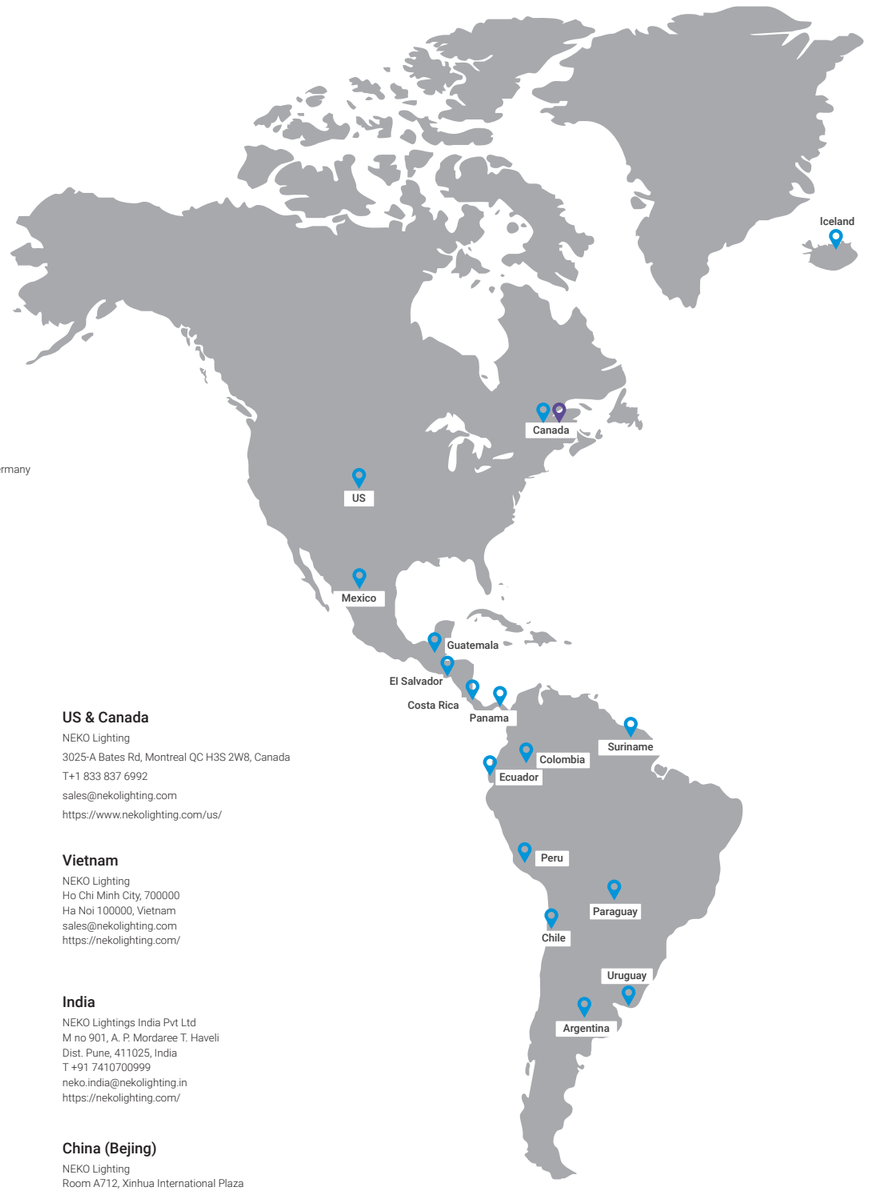

US & Canada

NEKO Lighting
3025-A Bates Rd, Montreal QC H3S 2W8, Canada
T+1 833 837 6992
sales@nekolighting.com
https://www.nekolighting.com/us/

Vietnam

NEKO Lighting
Ho Chi Minh City, 700000
Ha Noi 100000, Vietnam
sales@nekolighting.com
https://nekolighting.com/

India


NEKO Lightings India Pvt Ltd
M no 901, A. P. Mordaree T. Haveli
Dist. Pune, 411025, India
T +91 7410700999
neko.india@nekolighting.in
https://nekolighting.com/

China (Bejing)

NEKO Lighting
Room A712, Xinhua International Plaza
No.89 Dayangfang Road, Chaoyang District, Beijing, 100020, China
T +86 173 2681 1100
jonson@nekolighting.com
https://nekolighting.com/

China (Shanghai)

NEKO Lighting
Room 309, 3rd Floor, Mong Kok Plaza
No.175 East Yan'an Road, Huangpu District, Shanghai, 200001, China
T +86 189 2602 8927
jonson@nekolighting.com
https://nekolighting.com/

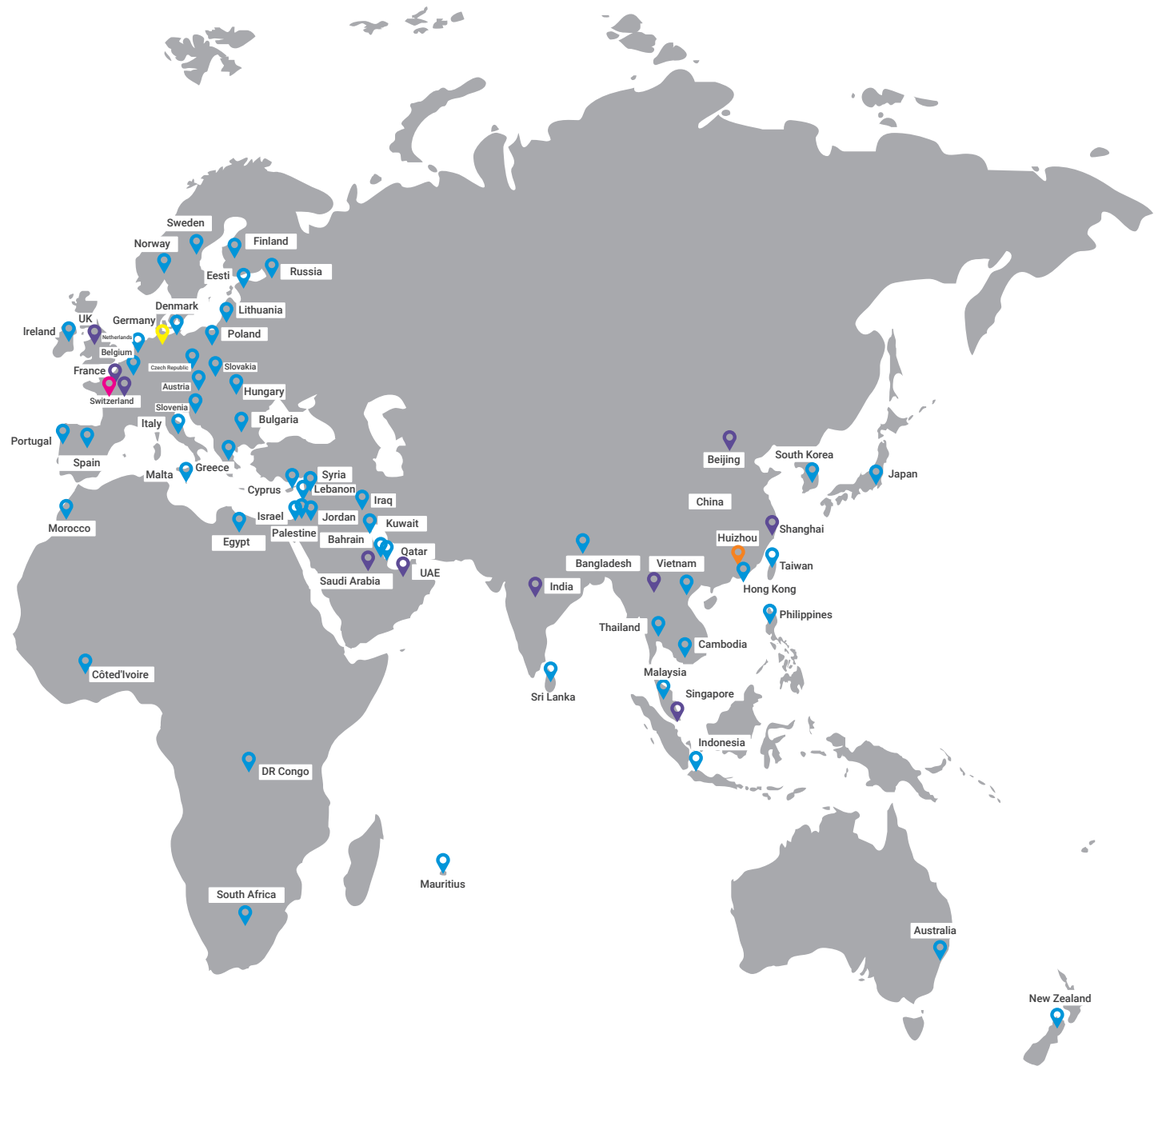

- Headquarters
- Factory
- Office & Warehouse
- Office
- Distributor